



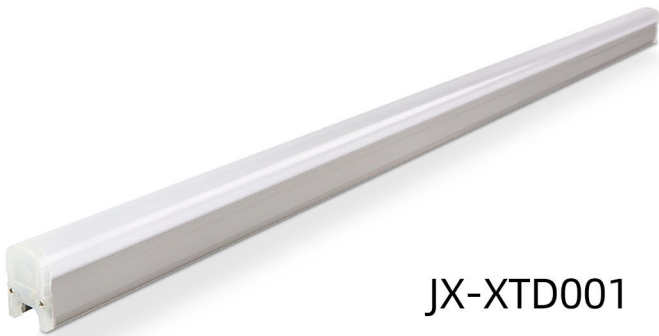


JX-XTD001

Product Size: (unit: mm) ± 5 mm

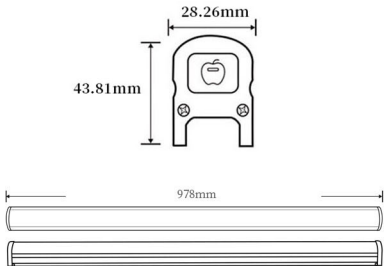


PRODUCT INFORMATION

Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5054/SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL/DMX512RGB/DMX512RGBW
Beam Angle	120°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

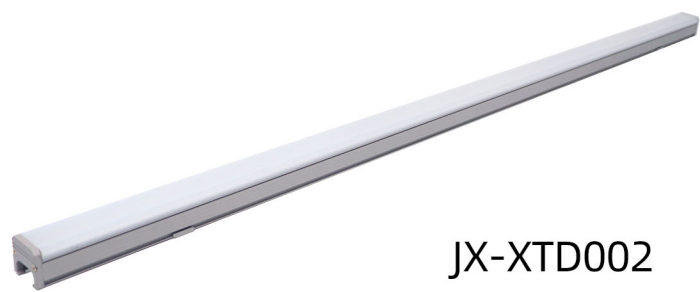


JX-XTD002

Product Size: (unit: mm) ± 5 mm

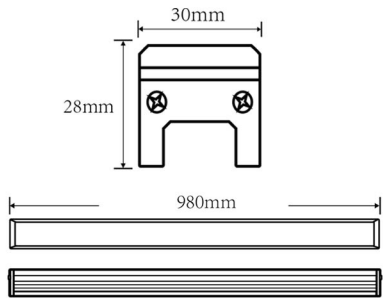

PRODUCT INFORMATION

Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5054/SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL/DMX512RGB/DMX512RGBW
Beam Angle	120°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

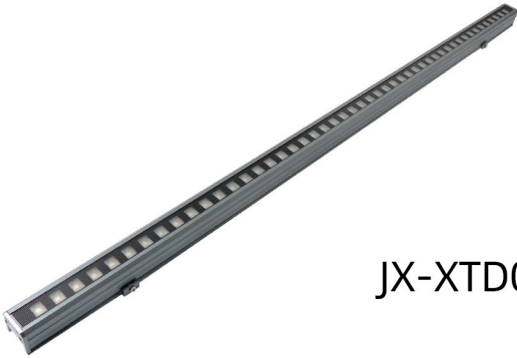


JX-XTD003




Product Size: (unit: mm) ± 5 mm

PRODUCT INFORMATION

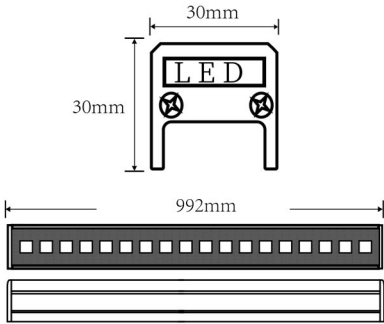


Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5054/SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL/DMX512RGB/DMX512RGBW
Beam Angle	120°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

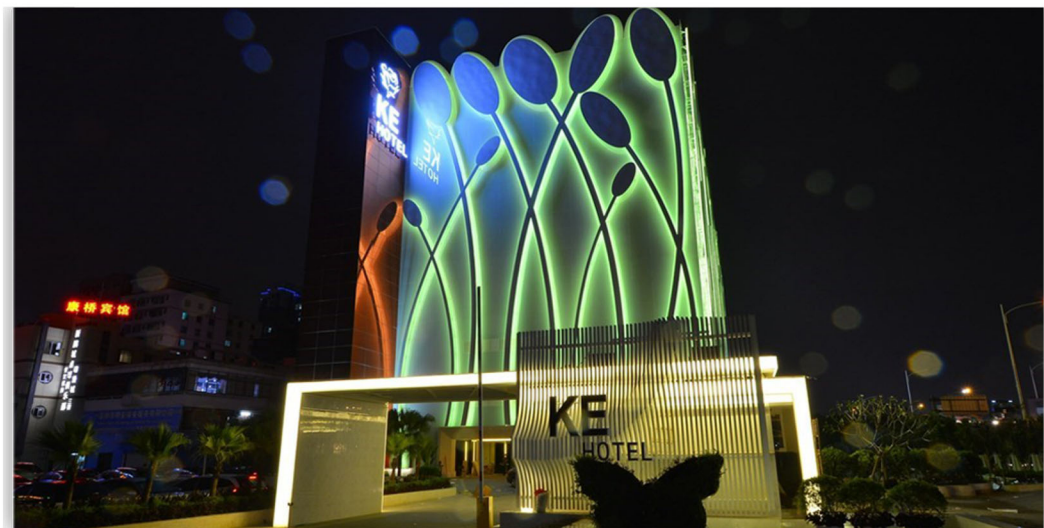

JX-XTD004




Product Size: (unit: mm) $\pm 5\text{mm}$

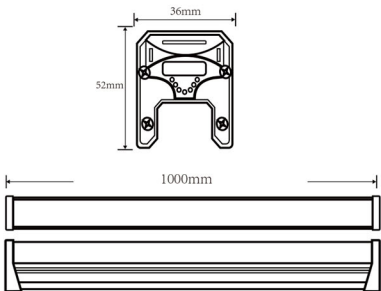

PRODUCT INFORMATION

Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL/DMX512RGB/DMX512RGBW
Beam Angle	120°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

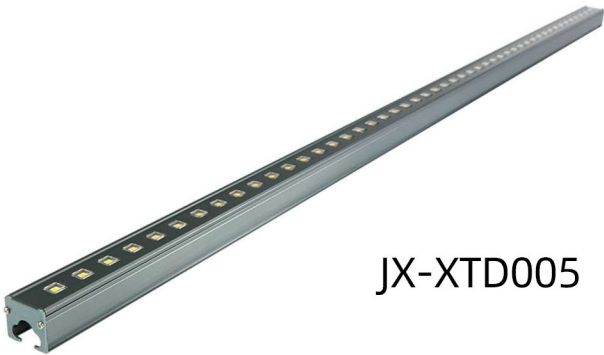


JX-XTD005




Product Size: (unit: mm) ± 5 mm

PRODUCT INFORMATION

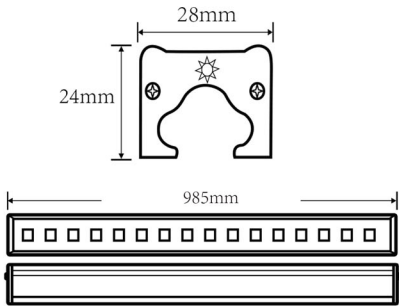


Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL
Beam Angle	120°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

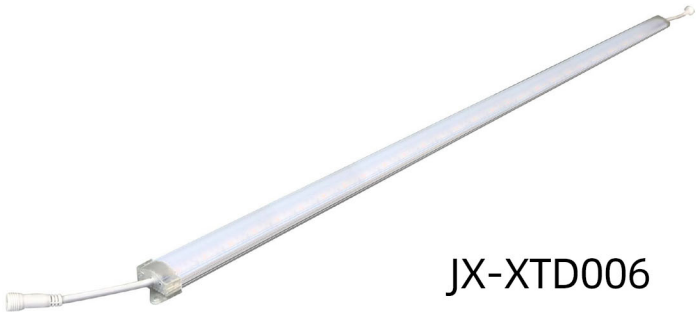

JX-XTD006




Product Size: (unit: mm) $\pm 5\text{mm}$

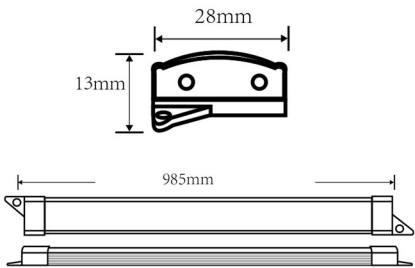

PRODUCT INFORMATION


Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD2835/SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL
Beam Angle	120°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

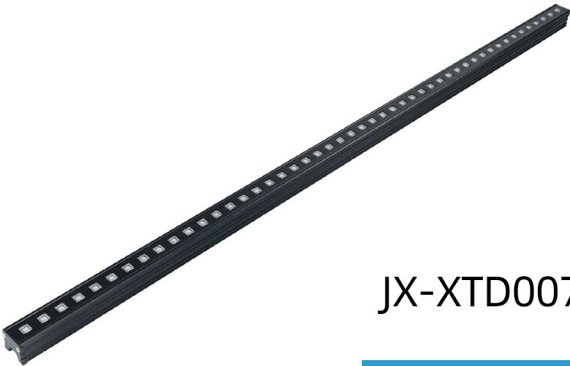

JX-XTD007




Product Size: (unit: mm) ± 5 mm

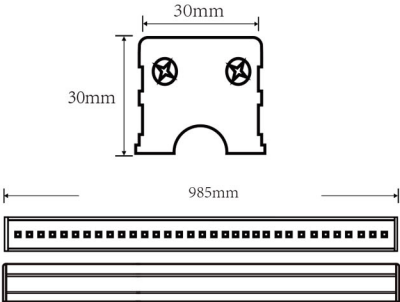

PRODUCT INFORMATION


Voltage(V)	DC12V
Wattage(W)	<12W
LED chips	SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL
BeamAngle	120°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

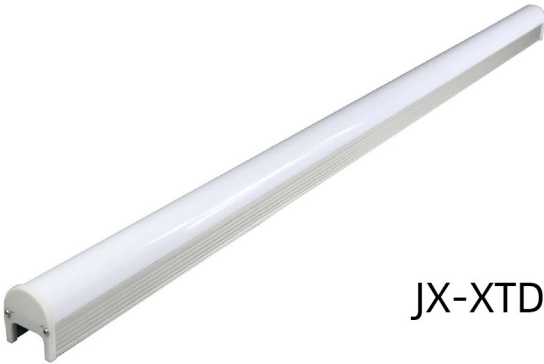

JX-XTD008



Product Size: (unit: mm) ± 5 mm

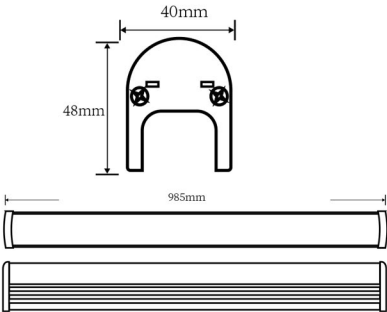

PRODUCT INFORMATION


Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL/DMX512RGB/DMX512RGBW
Beam Angle	120°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65



JX-XTD009



Product Size: (unit: mm) ± 5 mm

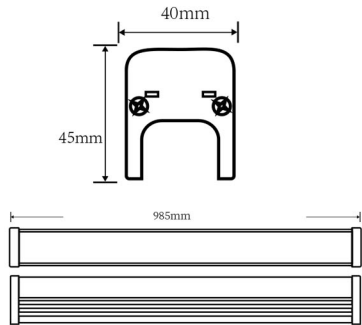

PRODUCT INFORMATION


Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL/DMX512RGB/DMX512RGBW
Beam Angle	120°
Working Temperature	-22℃~+58℃
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65



JX-XTD010




Product Size: (unit: mm) ± 5 mm




PRODUCT INFORMATION

Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD2835/SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL
Beam Angle	120°
Working Temperature	-22℃~+58℃
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

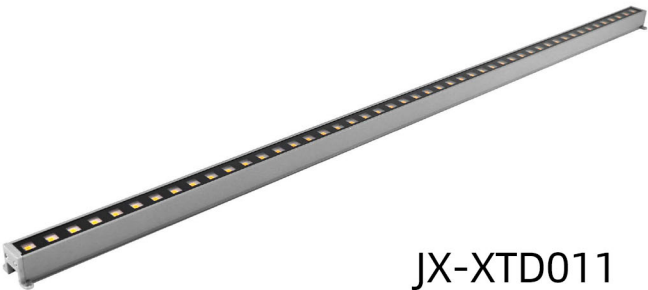


JX-XTD011

Product Size: (unit: mm) ± 5 mm

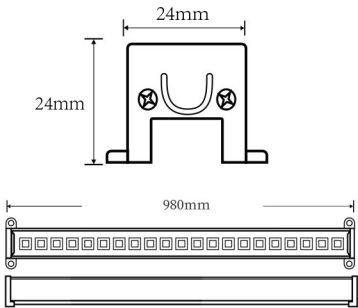

PRODUCT INFORMATION


Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5054/SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL
Beam Angle	120°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

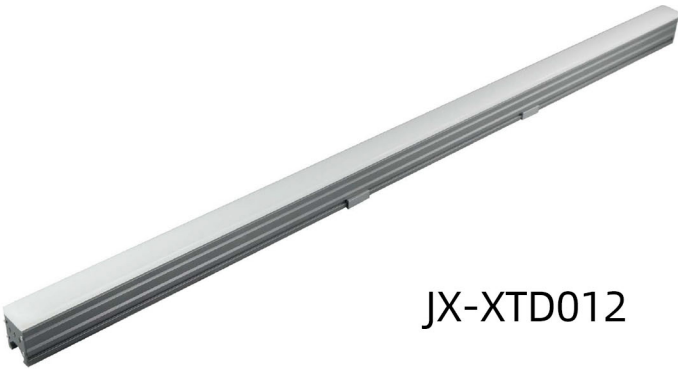


JX-XTD012

Product Size: (unit: mm) $\pm 5\text{mm}$

PRODUCT INFORMATION

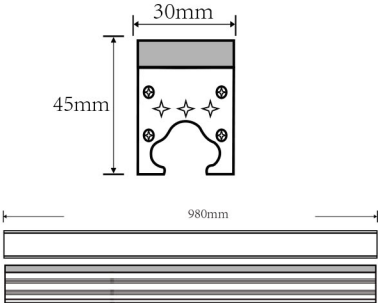


Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL/DMX512RGB/DMX512RGBW
Beam Angle	120°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

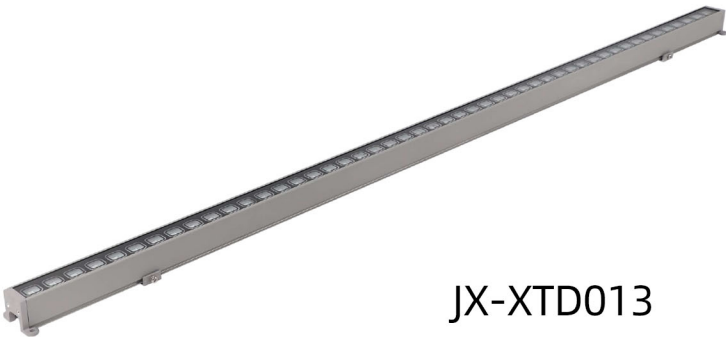


JX-XTD013

Product Size: (unit: mm) ± 5 mm

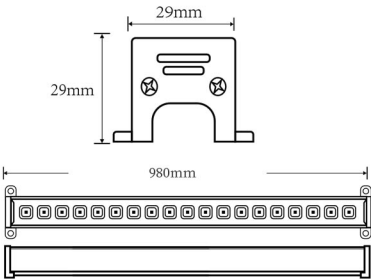


PRODUCT INFORMATION

Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5054/SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL
Beam Angle	120°
Working Temperature	-22℃~+58℃
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

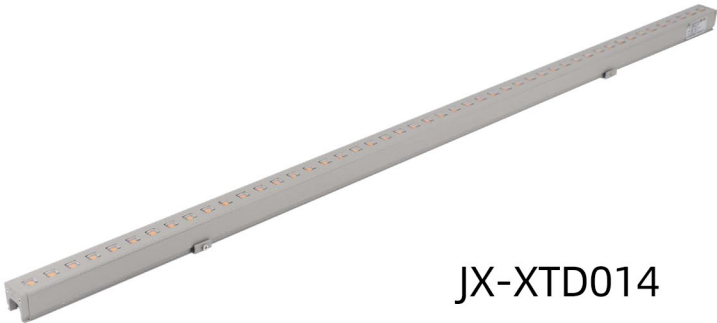


JX-XTD014

Product Size: (unit: mm) ± 5 mm

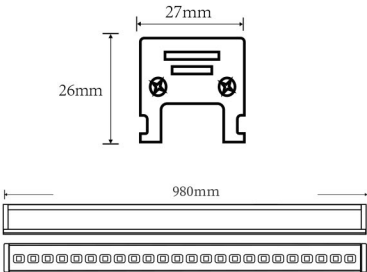


PRODUCT INFORMATION

Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5050 Sanan/Epistar/SMD5054
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL
Beam Angle	120°
Working Temperature	-22℃~+58℃
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

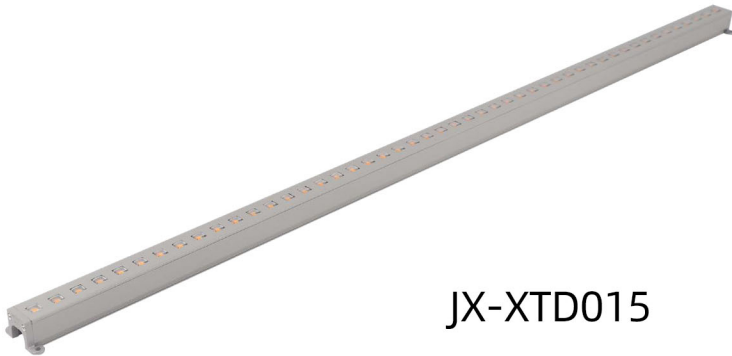



JX-XTD015

Product Size: (unit: mm) ± 5 mm

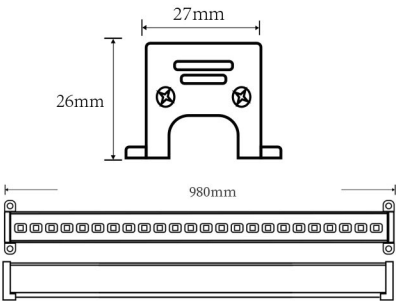


PRODUCT INFORMATION

Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5054/SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL
Beam Angle	120°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

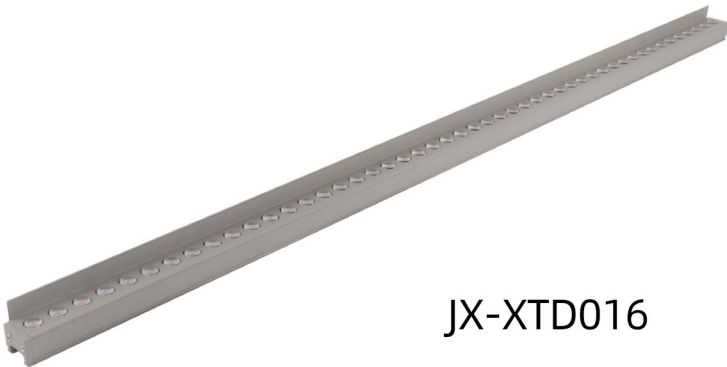


JX-XTD016

Product Size: (unit: mm) ± 5 mm

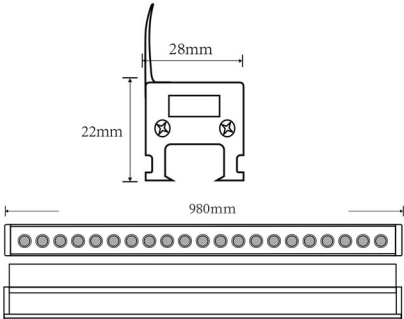


PRODUCT INFORMATION

Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5054/SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL
Beam Angle	120°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

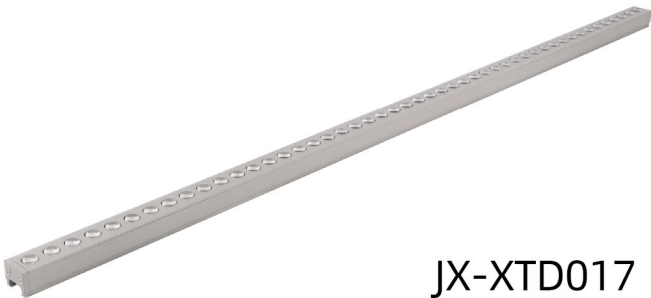


JX-XTD017

Product Size: (unit: mm) $\pm 5\text{mm}$

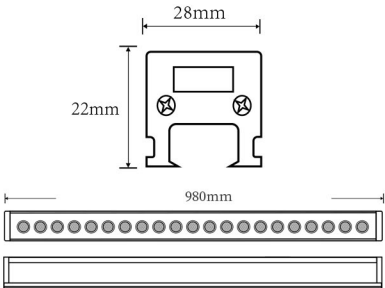


PRODUCT INFORMATION

Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5054/SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL/DMX512RGB/DMX512RGBW
Beam Angle	120°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

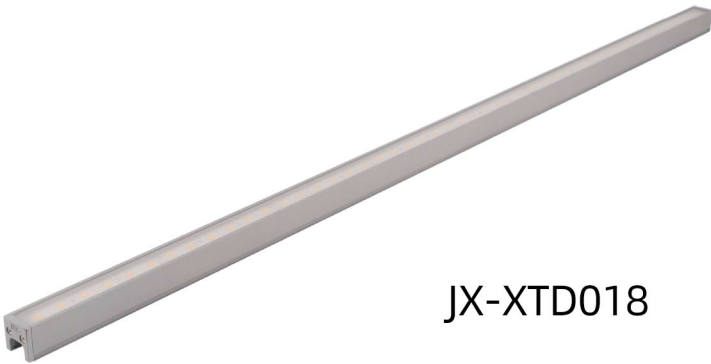

JX-XTD018

Product Size: (unit: mm) ± 5 mm

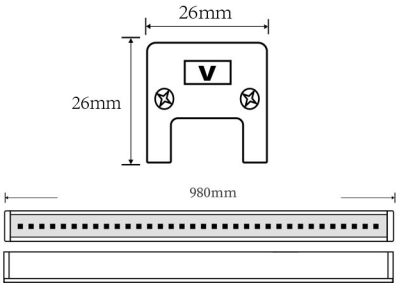


PRODUCT INFORMATION

Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL
Beam Angle	120°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65



JX-XTD019

Product Size: (unit: mm) ± 5 mm

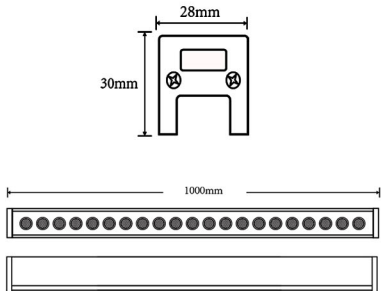

PRODUCT INFORMATION


Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL/DMX512RGB/DMX512RGBW
Beam Angle	15°-30°-45°-60°/10°60°/15°45°/20°40°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65



JX-XTD020



Product Size: (unit: mm) ± 5 mm




PRODUCT INFORMATION

Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL
Beam Angle	120°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65




JX-XTD021

Product Size: (unit: mm)±5mm

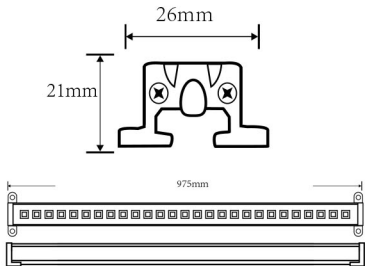


PRODUCT INFORMATION

Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5054/SMD5050 Sanan/Epistar
Number of leds	36led/m
CCT	W/WW/Y/R/G/B/RGB-TTL
Beam Angle	120°
Working Temperature	-22℃~+58℃
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

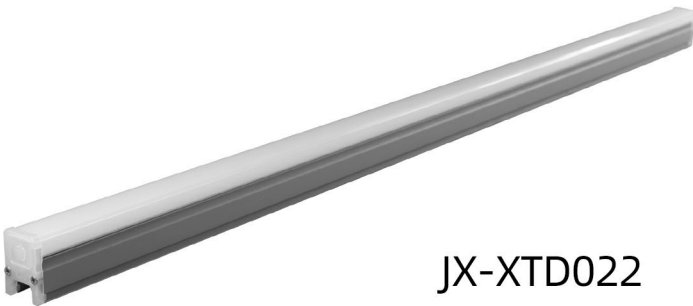

JX-XTD022

Product Size: (unit: mm)±5mm

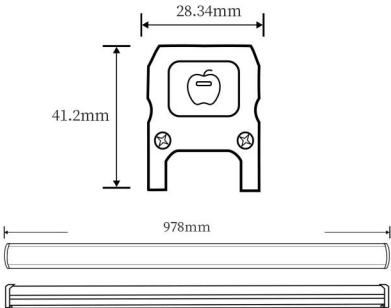

PRODUCT INFORMATION


Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL/DMX512RGB/DMX512RGBW
Beam Angle	120°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65



JX-XTD023




Product Size: (unit: mm) ± 5 mm

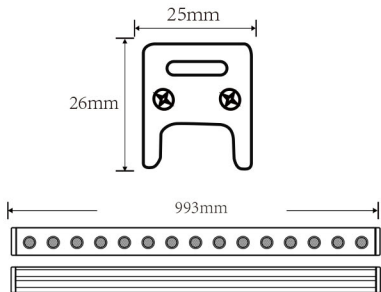

PRODUCT INFORMATION



Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL
Beam Angle	120°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

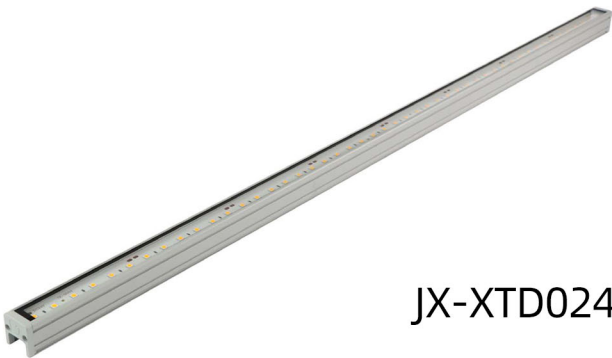

JX-XTD024




Product Size: (unit: mm)±5mm



PRODUCT INFORMATION

Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL/DMX512RGB/DMX512RGBW
Beam Angle	120°
Working Temperature	-22℃~+58℃
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

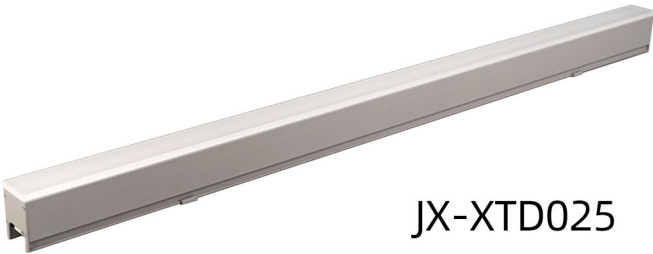


JX-XTD025




Product Size: (unit: mm)±5mm

PRODUCT INFORMATION

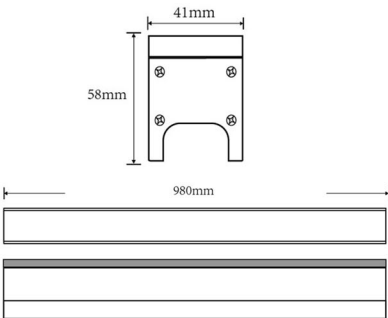


Voltage(V)	DC24V
Wattage(W)	10W/36W
LED chips	SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL/DMX512RGB/DMX512RGBW
Beam Angle	120°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

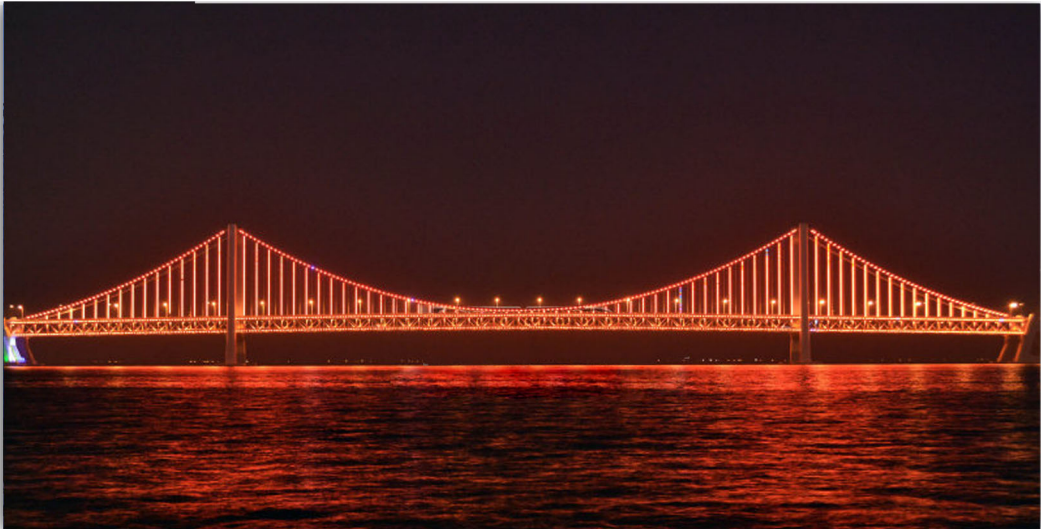

JX-XTD026




Product Size: (unit: mm)±5mm

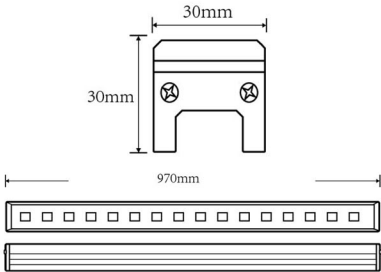

PRODUCT INFORMATION

Voltage(V)	DC12V
Wattage(W)	<12W
LED chips	SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL/DMX512RGB/DMX512RGBW
Beam Angle	120°
Working Temperature	—22℃~+58℃
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

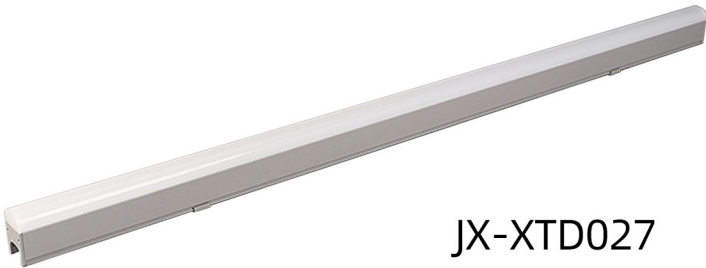


JX-XTD027




Product Size: (unit: mm)±5mm

PRODUCT INFORMATION

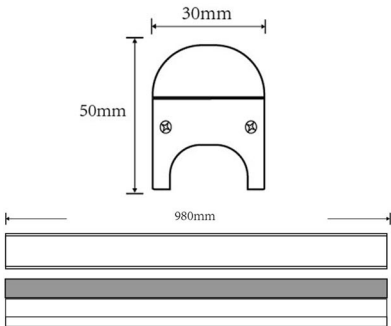


Voltage(V)	DC24V
Wattage(W)	<12W
LED chips	SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL/DMX512RGB/DMX512RGBW
Beam Angle	120°
Working Temperature	-22℃~+58℃
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65

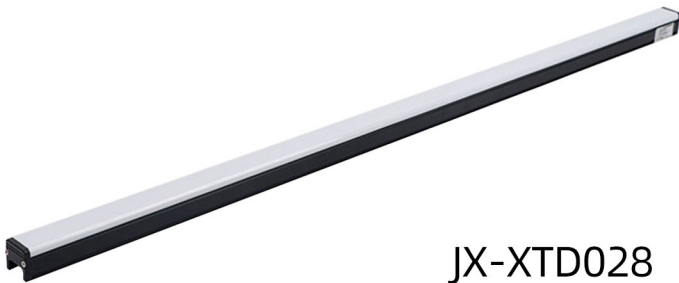

JX-XTD028



Product Size: (unit: mm)±5mm

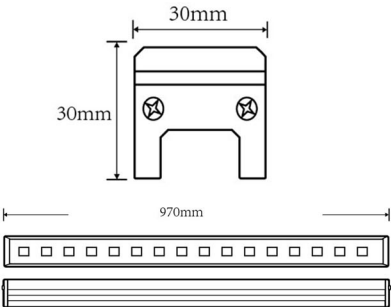


PRODUCT INFORMATION

Voltage(V)	DC12V
Wattage(W)	<12W
LED chips	SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL/DMX512RGB/DMX512RGBW
Beam Angle	120°
Working Temperature	-22°C~+58°C
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65



JX-XTD029

Product Size: (unit: mm)±5mm

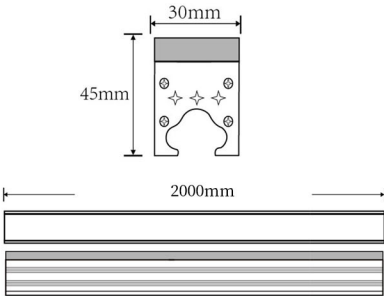

PRODUCT INFORMATION

Voltage(V)	DC24V
Wattage(W)	<18W
LED chips	SMD5050 Sanan/Epistar
Number of leds	48led/m
CCT	W/WW/Y/R/G/B/RGB-TTL/DMX512RGB/DMX512RGBW
Beam Angle	120°
Working Temperature	-22℃~+58℃
Lamp Life	>30000Hours
Adjustable Angle	NO
IP Rate	IP65