JX-XQD001

## Product Size: (unit: mm)±5mm




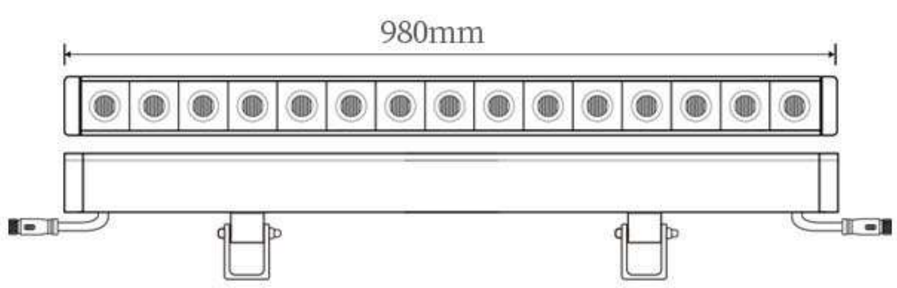


## PRODUCT INFORMATION

| | |
|---|---|
| Voltage(V) | DC24V |
| Wattage(W) | 18W 24W 36W |
| LED chips | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source | SMD3030 |
| Working Temperature | —22℃~+58℃ |
| Lamp Life | >30000Hours |
| Beam Angle | 15°-30°-45°-60°/10*60°/15*45°/20*40° |
| Adjustable Angle | YES |
| IP Rate | IP65 |
| CCT | W/WW/Y/DMX512RGB/DMX512RGBW |

JX-XQD002

## Product Size: (unit: mm)±5mm

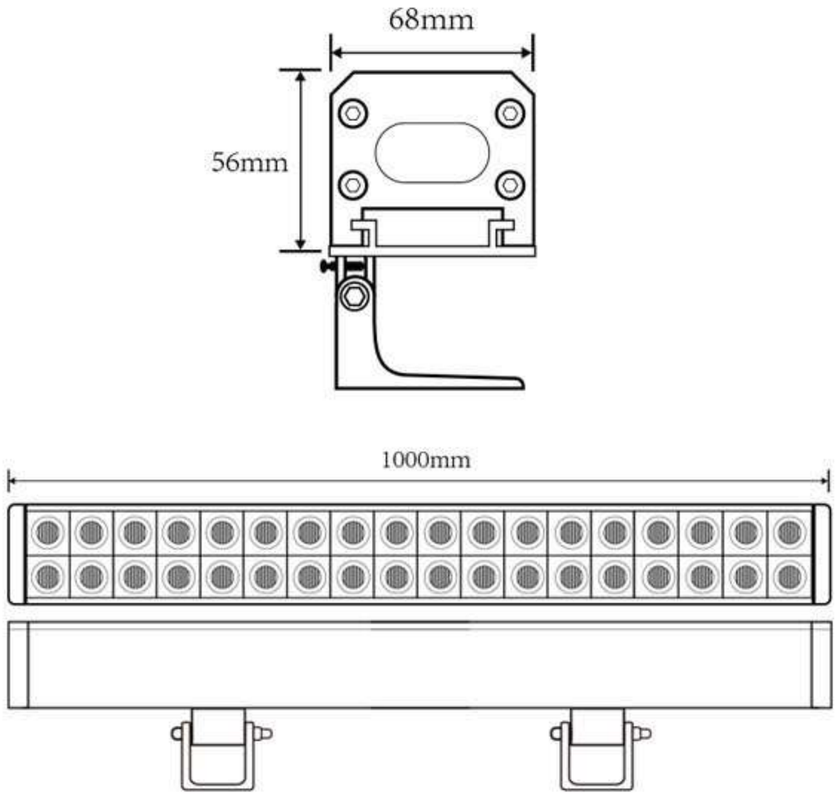


## PRODUCT INFORMATION

| | |
|---|---|
| Voltage(V) | DC24V |
| Wattage(W) | 18W 24W 36W 72W |
| LED chips | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source | SMD3030 |
| Working Temperature | —22℃~+58℃ |
| Lamp Life | >30000Hours |
| Beam Angle | 15°-30°-45°-60°/10*60°/15*45°/20*40° |
| Adjustable Angle | YES |
| IP Rate | IP65 |
| CCT | W/WW/Y/DMX512RGB/DMX512RGBW |

JX-XQD003

## Product Size: (unit: mm)±5mm

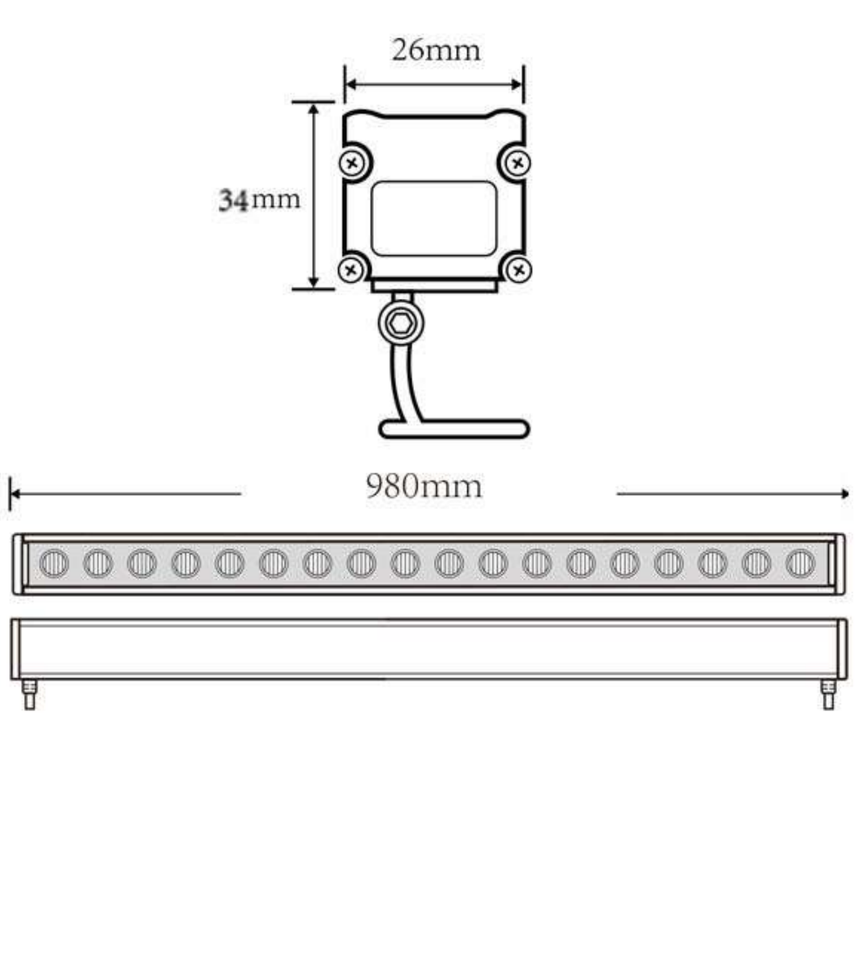


## PRODUCT INFORMATION

| | |
|---|---|
| Voltage(V) | DC24V |
| Wattage(W) | 18W 24W 36W |
| LED chips | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source | SMD3030/SMD2835 |
| Working Temperature | —22℃~+58℃ |
| Lamp Life | >30000Hours |
| Beam Angle | 15/30/45/60 degree |
| Adjustable Angle | YES |
| IP Rate | IP65 |
| CCT | W/WW/Y/DMX512RGB/DMX512RGBW |

JX-XQD004

## Product Size: (unit: mm)±5mm

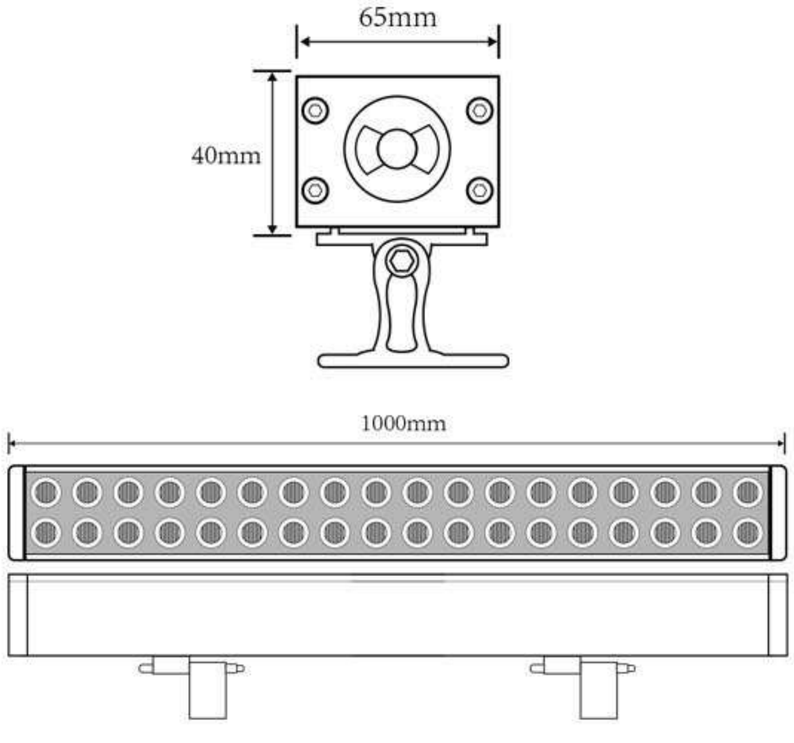


## PRODUCT INFORMATION

| | |
|---|---|
| Voltage(V) | DC24V |
| Wattage(W) | 48W |
| LED chips | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source | SMD5050/SMD3535 |
| Working Temperature | —22℃~+58℃ |
| Lamp Life | >30000Hours |
| Beam Angle | 15°-30°-45°-60°/10*60°/15*45°/20*40° |
| Adjustable Angle | YES |
| IP Rate | IP65 |
| CCT | W/WW/Y/DMX512RGB/DMX512RGBW |

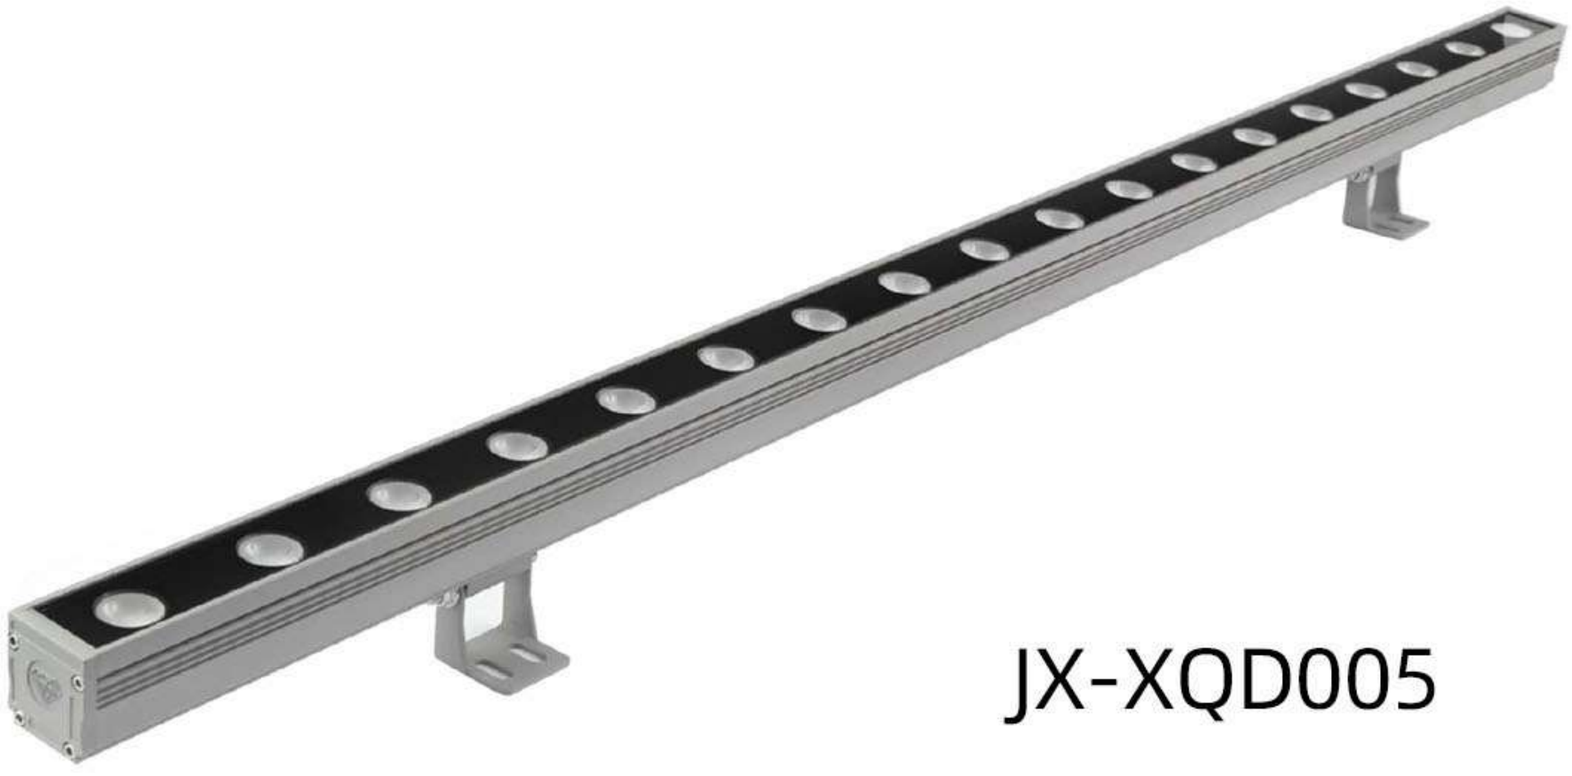

JX-XQD005

## Product Size: (unit: mm)±5mm

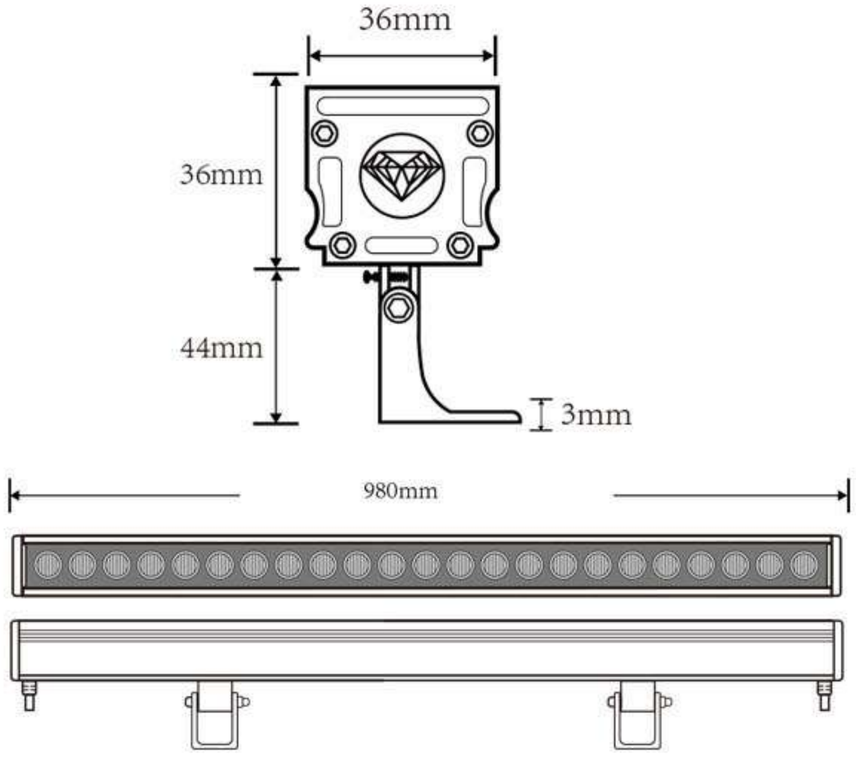


## PRODUCT INFORMATION

| | |
|---|---|
| Voltage(V) | DC24V |
| Wattage(W) | 18W 24W 36W |
| LED chips | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source | SMD5050/SMD3535/SMD3030 |
| Working Temperature | —22℃~+58℃ |
| Lamp Life | >30000Hours |
| Beam Angle | 15°-30°-45°-60°/10*60°/15*45°/20*40° |
| Adjustable Angle | YES |
| IP Rate | IP65 |
| CCT | W/WW/Y/DMX512RGB/DMX512RGBW |

JX-XQD006

## Product Size: (unit: mm)±5mm

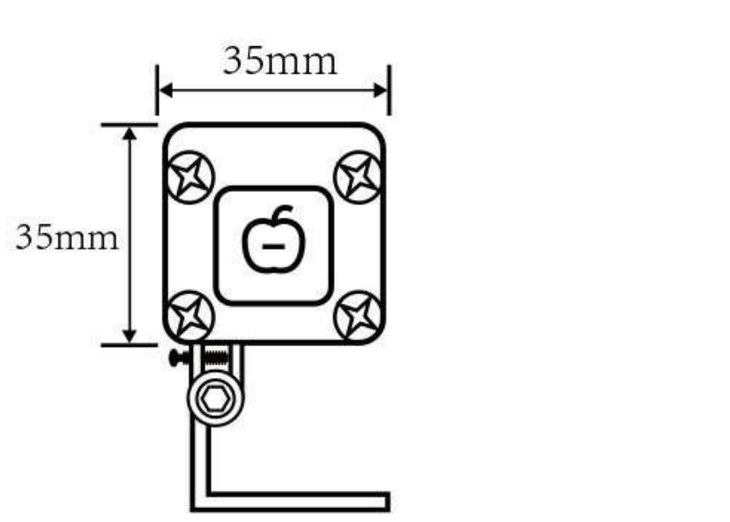


## PRODUCT INFORMATION

| | |
|---|---|
| Voltage(V) | DC24V |
| Wattage(W) | 18W 24W 36W |
| LED chips | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source | SMD5050/SMD3535/SMD3030 |
| Working Temperature | —22℃~+58℃ |
| Lamp Life | >30000Hours |
| Beam Angle | 15°-30°-45°-60°/10*60°/15*45°/20*40° |
| Adjustable Angle | YES |
| IP Rate | IP65 |
| CCT | W/WW/Y/DMX512RGB/DMX512RGBW |

JX-XQD007

**Product Size:** (unit: mm)±5mm




## PRODUCT INFORMATION

| | |
|---|---|
| Voltage(V) | DC24V |
| Wattage(W) | 18W 24W 36W |
| LED chips | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source | SMD5050/SMD3535/SMD3030 |
| Working Temperature | —22℃~+58℃ |
| Lamp Life | >30000Hours |
| Beam Angle | 15°-30°-45°-60°/10*60°/15*45°/20*40° |
| Adjustable Angle | YES |
| IP Rate | IP65 |
| CCT | W/WW/Y/DMX512RGB/DMX512RGBW |

JX-XQD008

## Product Size: (unit: mm)±5mm

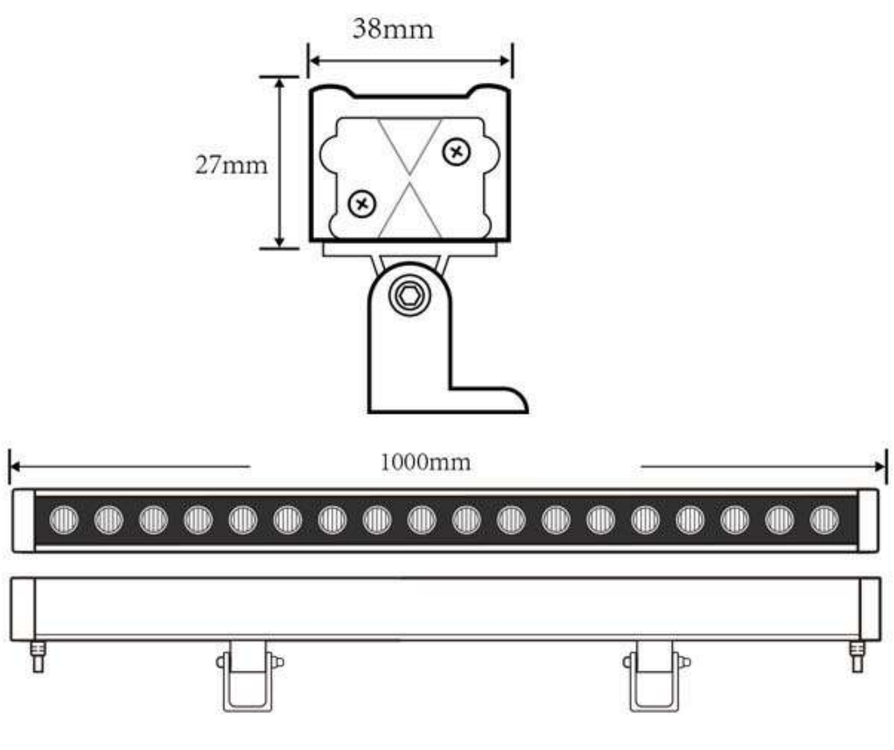


## PRODUCT INFORMATION

| | |
|---|---|
| Voltage(V) | DC24V |
| Wattage(W) | 18W 24W 36W |
| LED chips | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source | SMD5050/SMD3535 |
| Working Temperature | —22℃~+58℃ |
| Lamp Life | >30000Hours |
| Beam Angle | 15/30/45/60 degree |
| Adjustable Angle | YES |
| IP Rate | IP65 |
| CCT | W/WW/Y/DMX512RGB/DMX512RGBW |

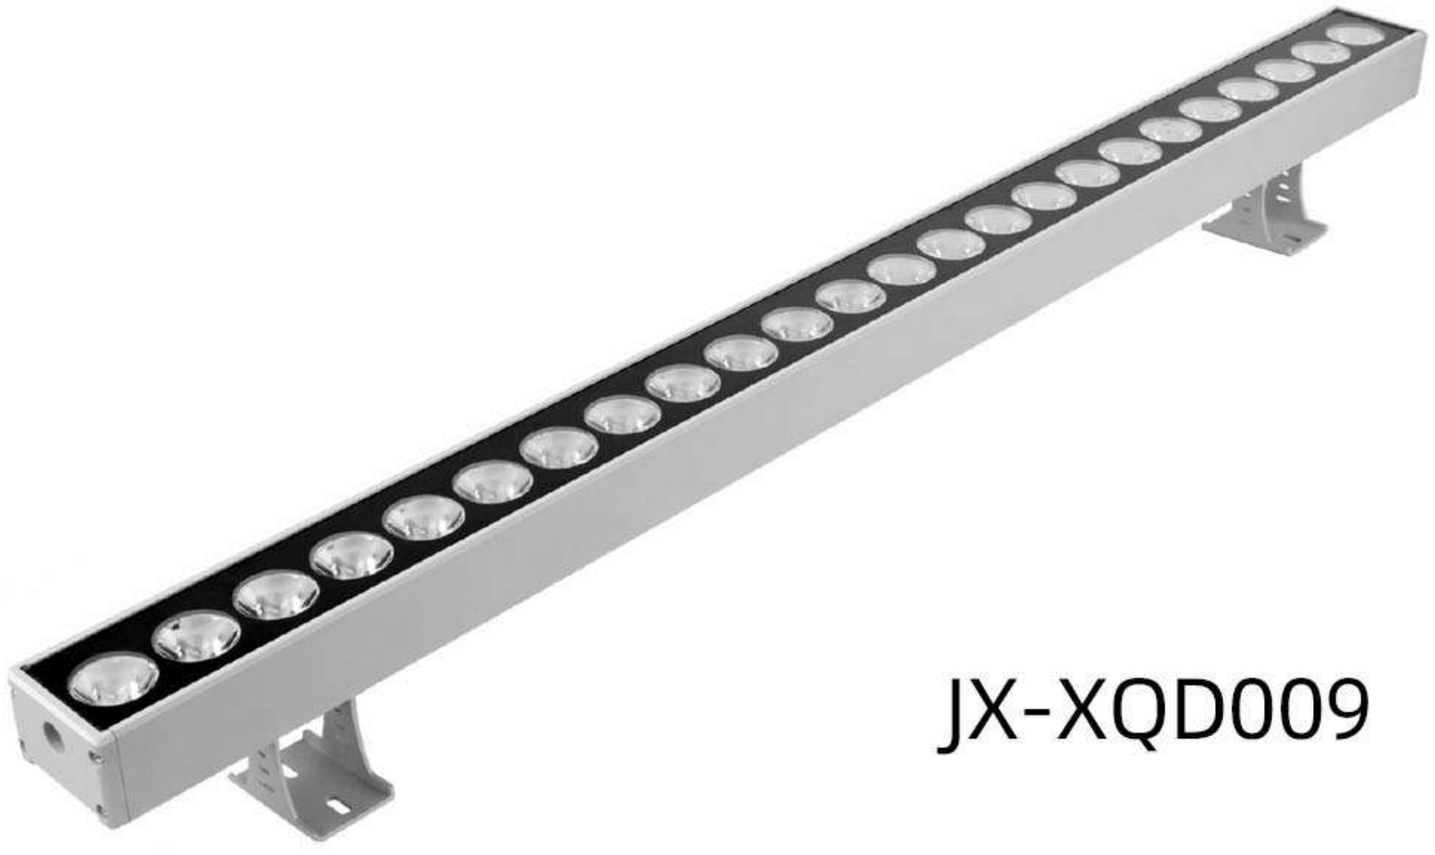

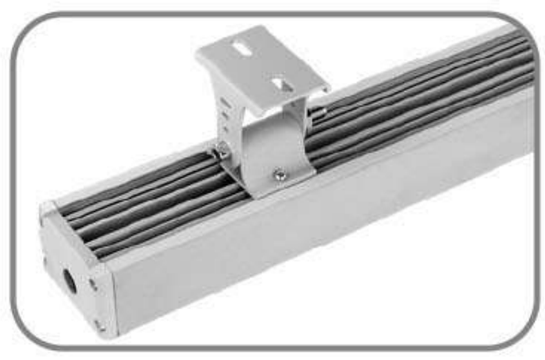

JX-XQD009

## Product Size: (unit: mm)±5mm

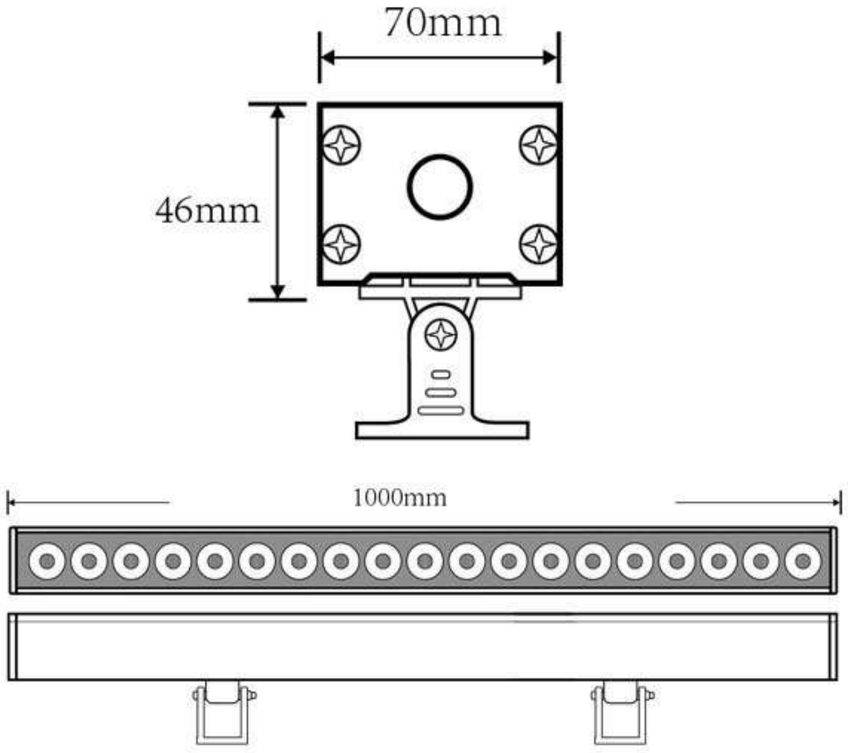


## PRODUCT INFORMATION

| | |
|---|---|
| Voltage(V) | DC24V |
| Wattage(W) | 96W-144W |
| LED chips | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source | CREE |
| Working Temperature | -20(℃)to +68 (℃) |
| Lamp Life | >30000Hours |
| Beam Angle | 3Degree |
| Adjustable Angle | YES |
| IP Rate | IP65 |
| CCT | W/WW/Y/DMX512RGB/DMX512RGBW |

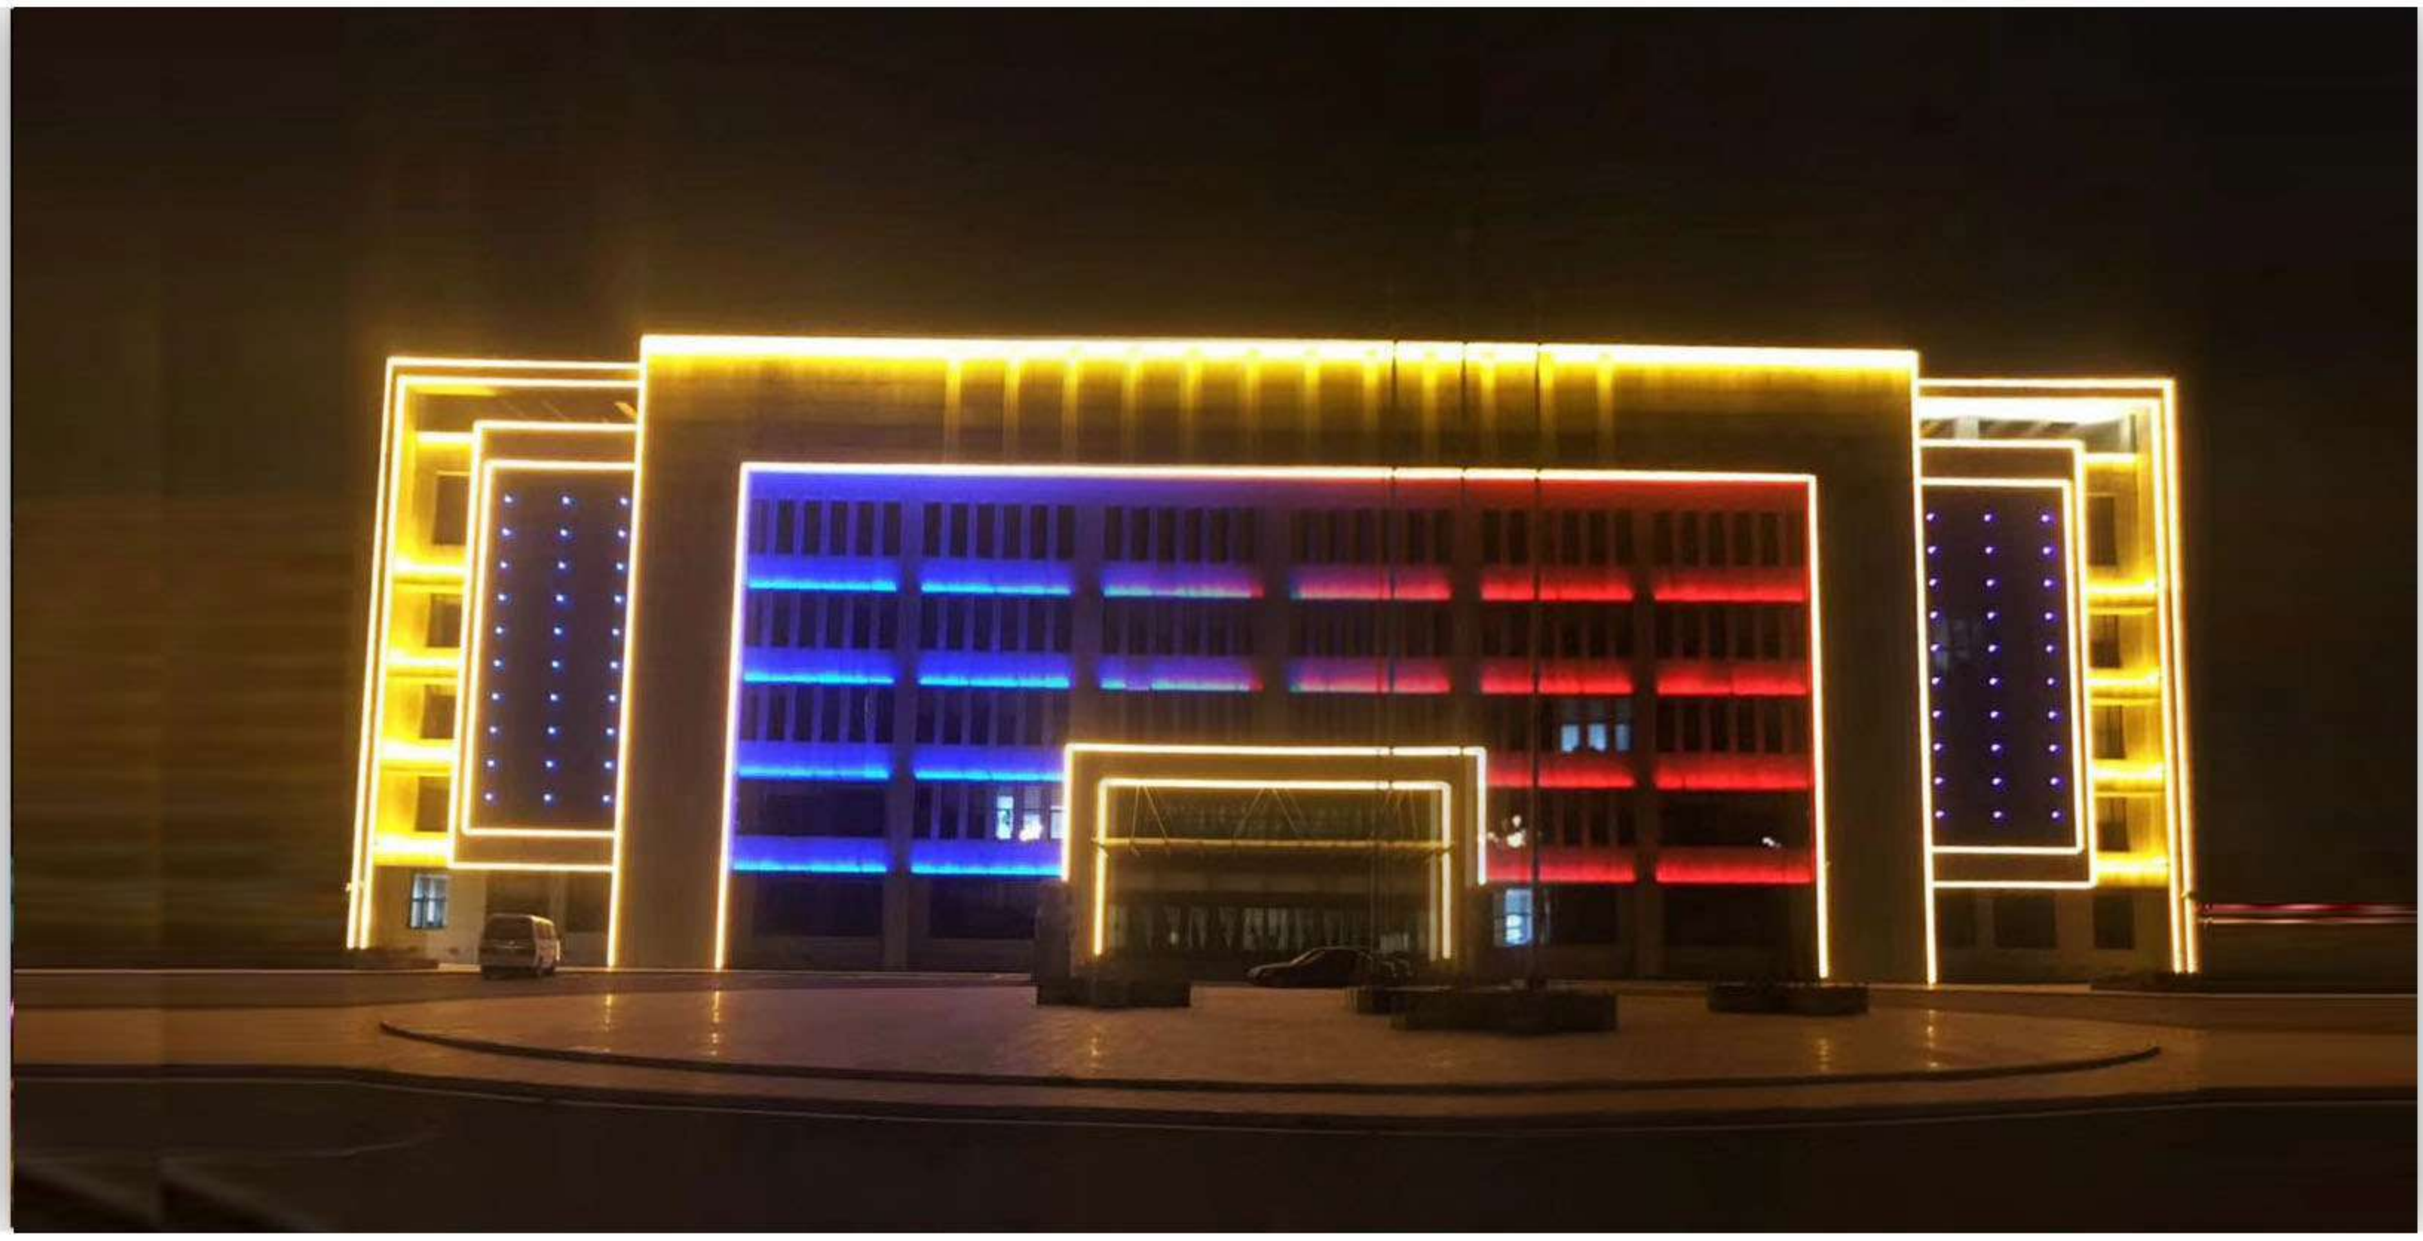

JX-XQD010

## Product Size: (unit: mm)±5mm

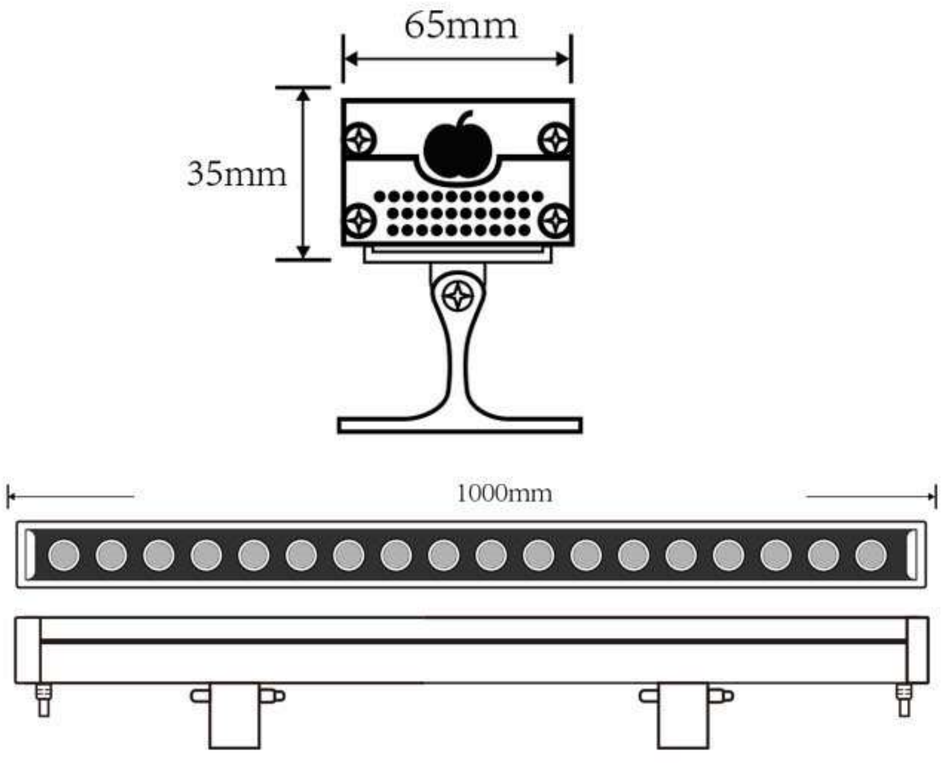


## PRODUCT INFORMATION

| | |
|---|---|
| Voltage(V) | DC24V |
| Wattage(W) | 18W 24W 36W |
| LED chips | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source | SMD5050/SMD3535 |
| Working Temperature | —22℃~+58℃ |
| Lamp Life | >30000Hours |
| Beam Angle | 15/30/45/60 degree |
| Adjustable Angle | YES |
| IP Rate | IP65 |
| CCT | W/WW/Y/DMX512RGB/DMX512RGBW |

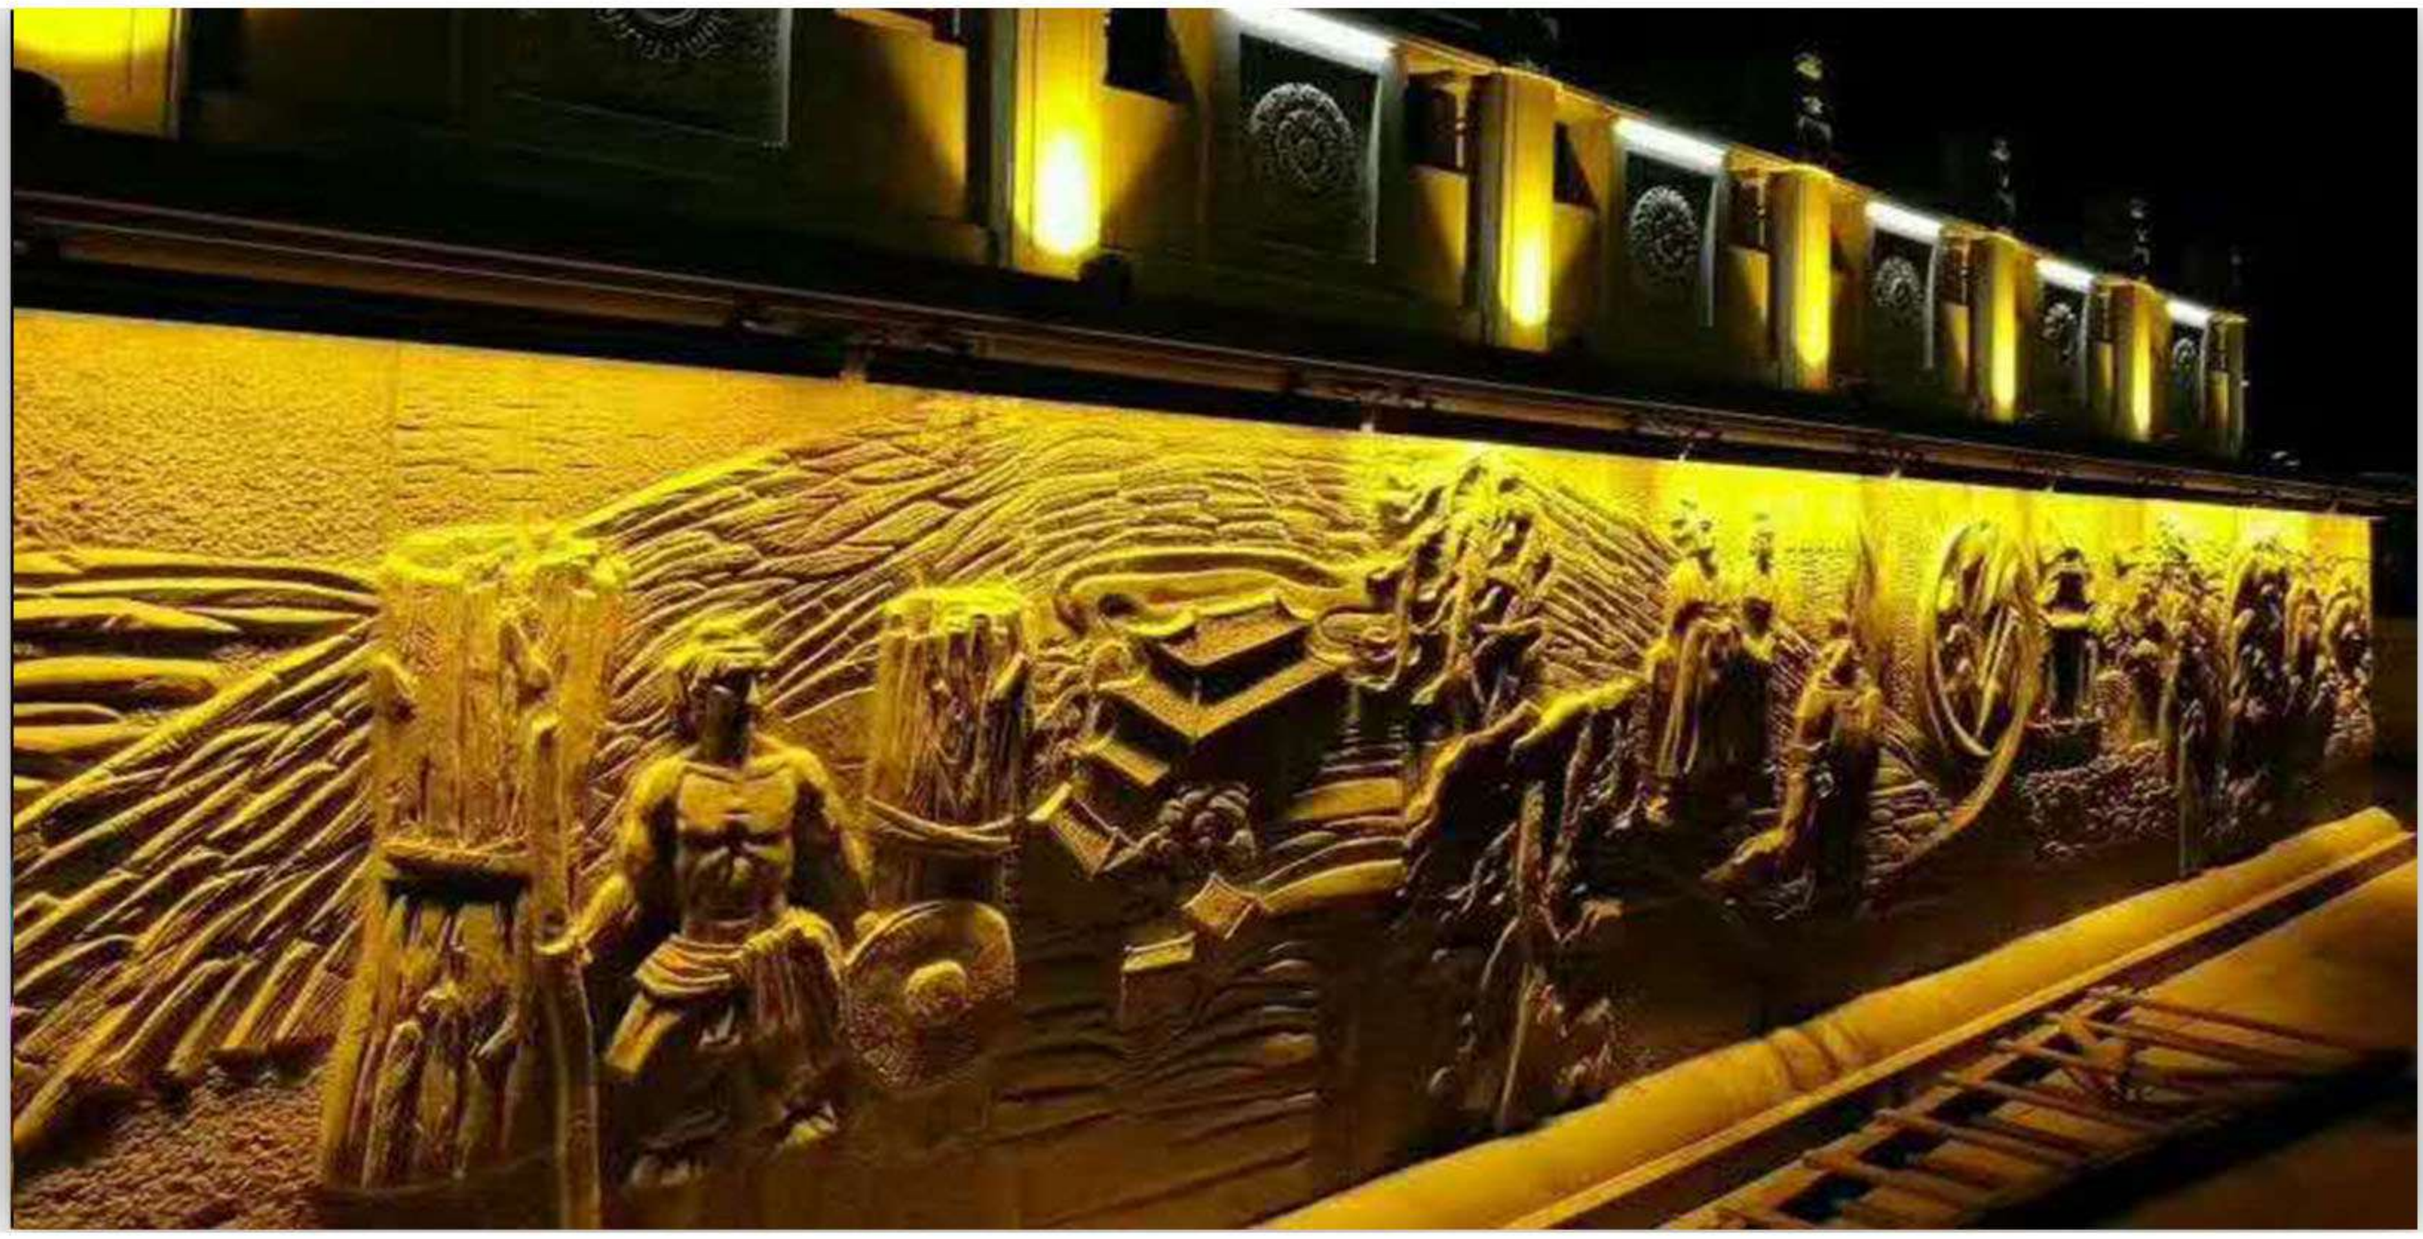

JX-XQD011

## Product Size: (unit: mm)±5mm

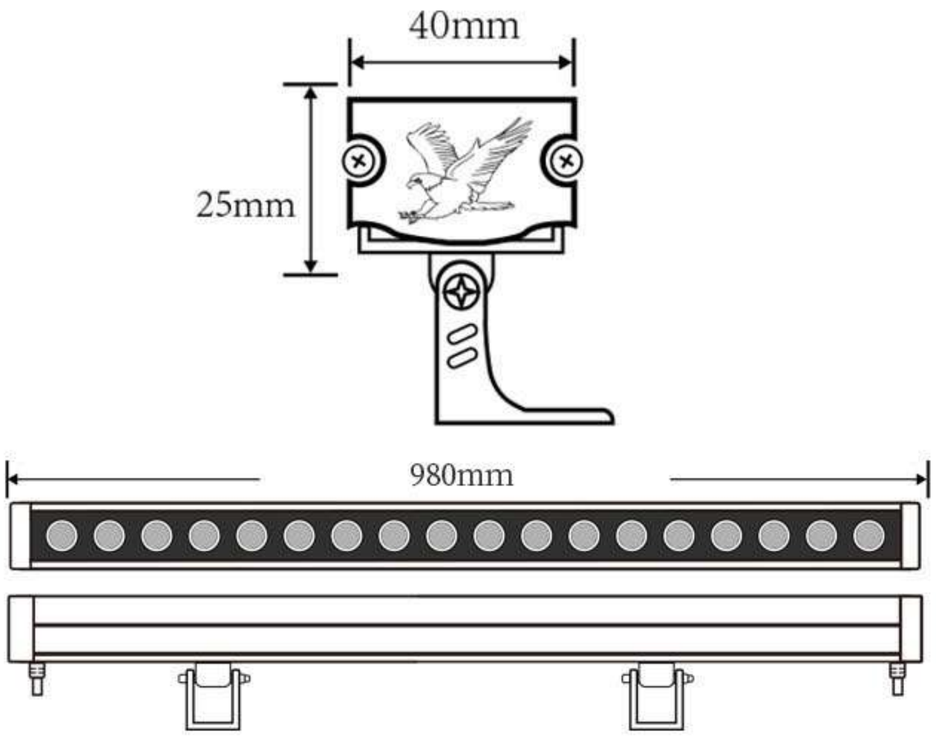


## PRODUCT INFORMATION

| | |
|---|---|
| Voltage(V) | DC24V |
| Wattage(W) | 18W 24W |
| LED chips | Bridgelux/Philips/Sanan/Epistar |
| Light source | SMD3030/SMD2835 |
| Bean Angle | 30°-45°-60° |
| Working Temperature | —22℃~+58℃ |
| Lamp Life | >30000Hours |
| Adjustable Angle | YES |
| IP Rate | IP65 |
| CCT | W/WW/Y |

JX-XQD012

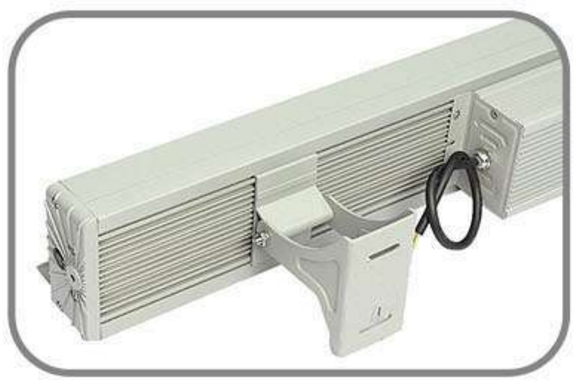

## Product Size: (unit: mm)±5mm

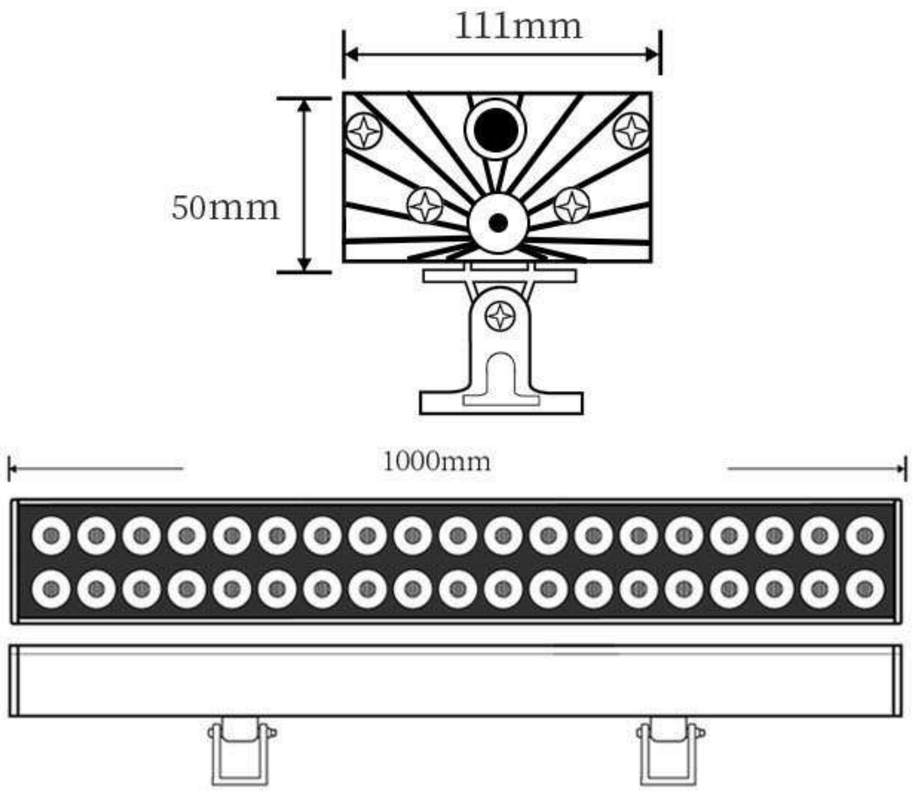


## PRODUCT INFORMATION

| | |
|---|---|
| Voltage(V) | DC24V |
| Wattage(W) | 96W-144W |
| LED chips | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source | CREE |
| Working Temperature | -20 (℃)to +68 (℃) |
| Lamp Life | >30000Hours |
| Beam Angle | 3Degree |
| Adjustable Angle | YES |
| IP Rate | IP65 |
| CCT | W/WW/Y/DMX512RGB/DMX512RGBW |

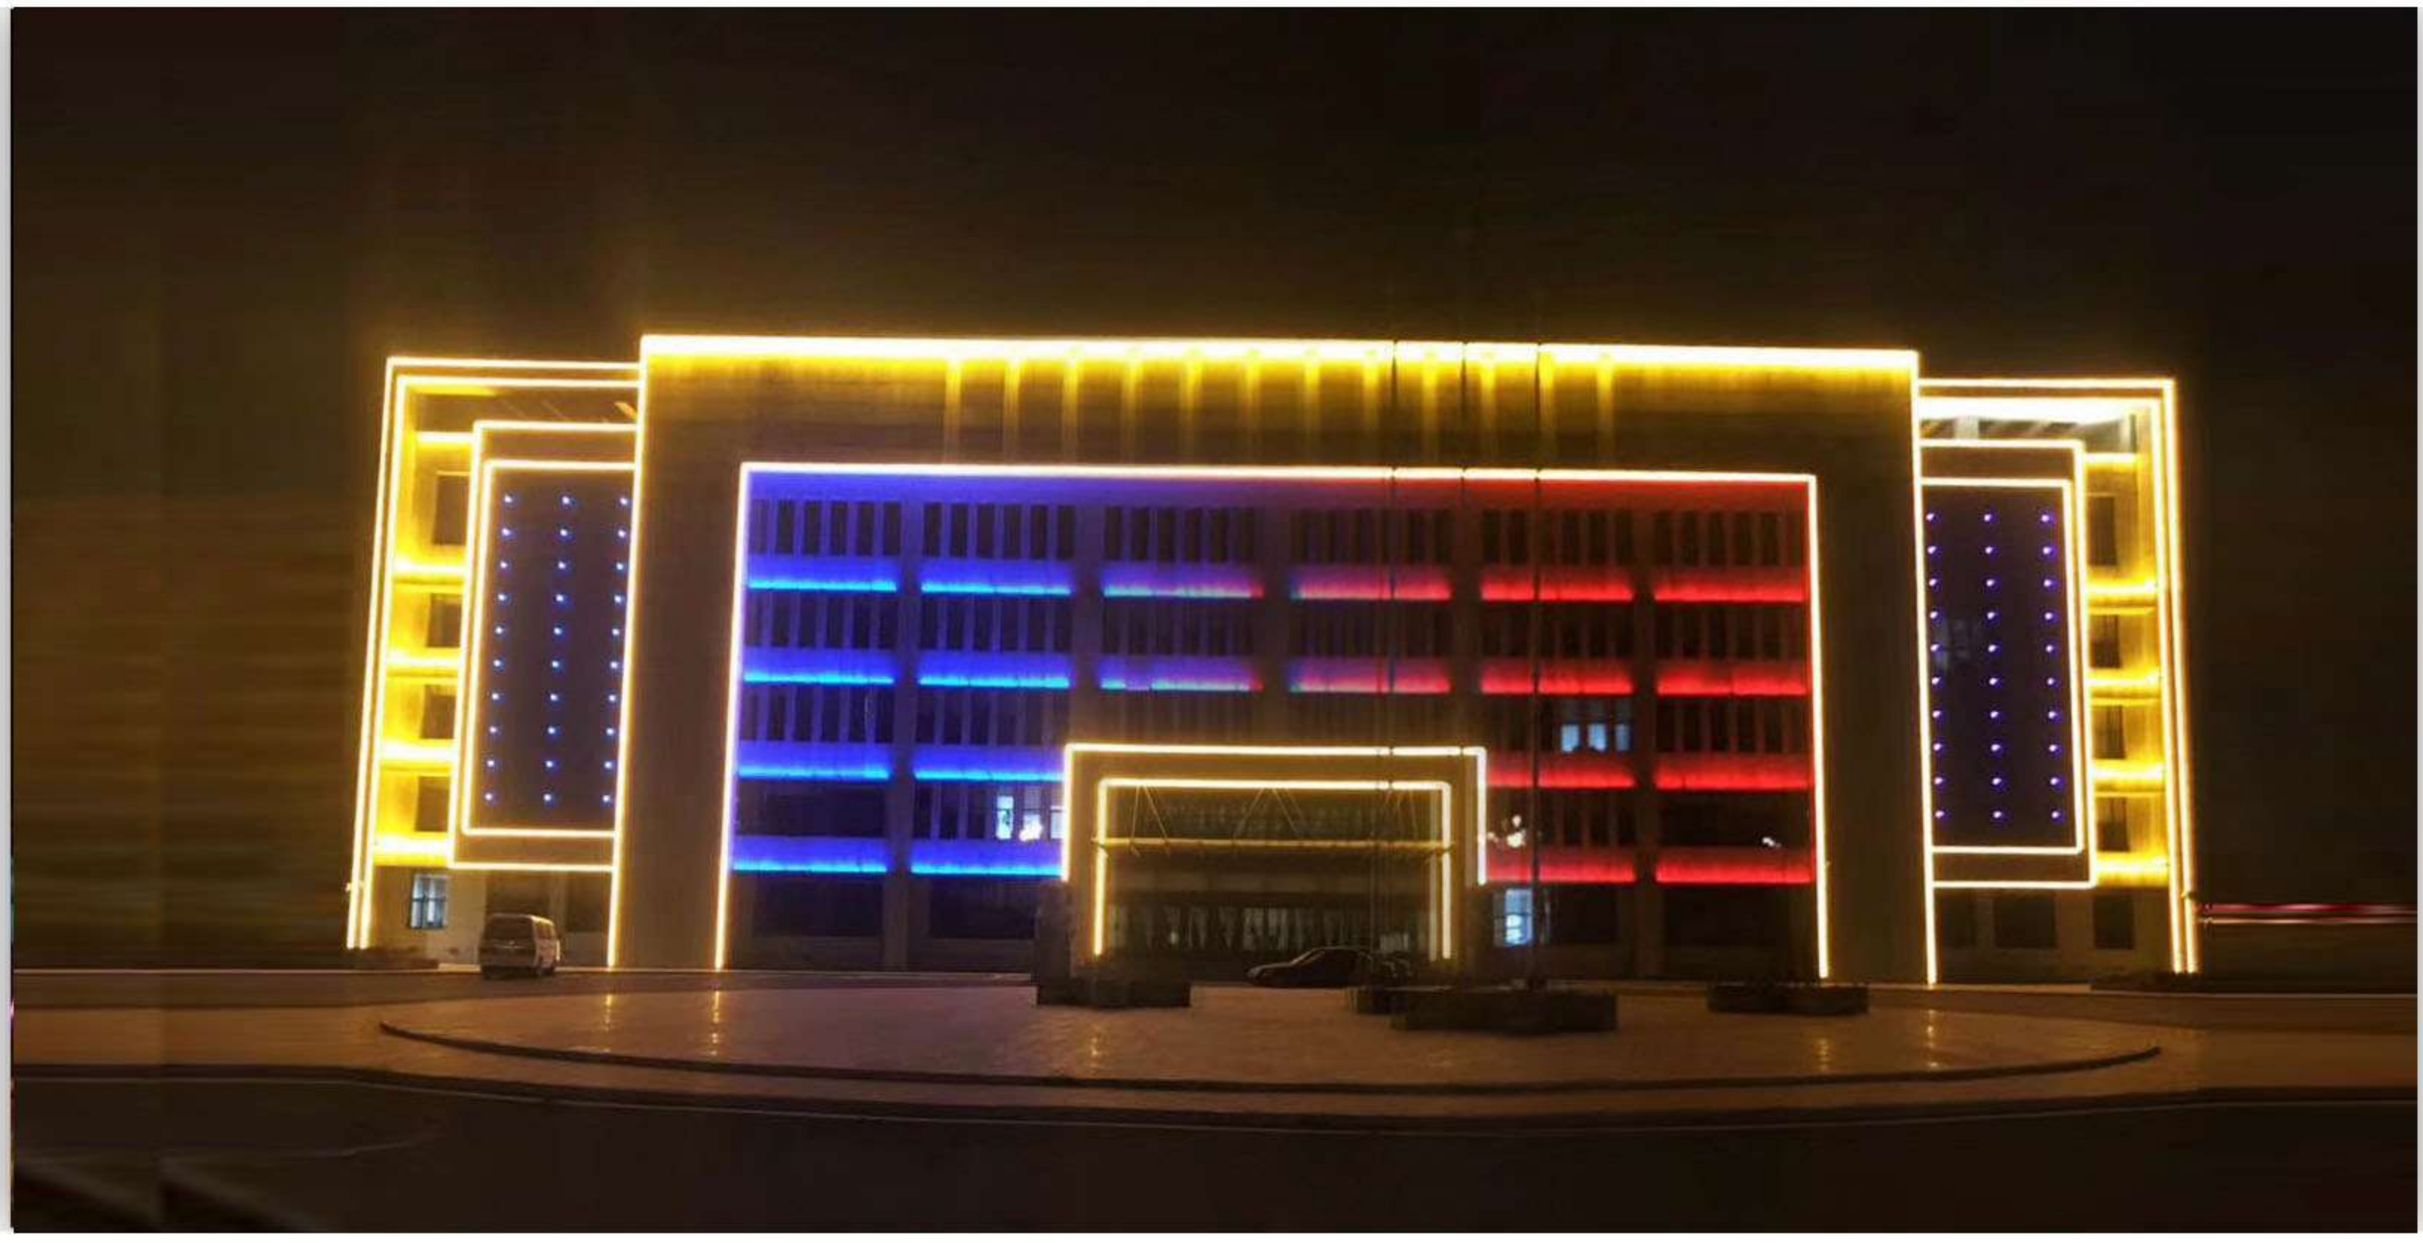

JX-XQD013

## Product Size: (unit: mm)±5mm




## PRODUCT INFORMATION

| | |
|---|---|
| Voltage(V) | AC180V-240V |
| Wattage(W) | 18W 24W 36W |
| LED chips | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source | SMD3030/SMD2835 |
| Bean Angle | 15-30-45-60/10*60/15*45/20*40 |
| Working Temperature | —22℃~+58℃ |
| Lamp Life | >30000Hours |
| Adjustable Angle | YES |
| IP Rate | IP65 |
| CCT | W/WW/Y/DMX512RGB/DMX512RGBW |

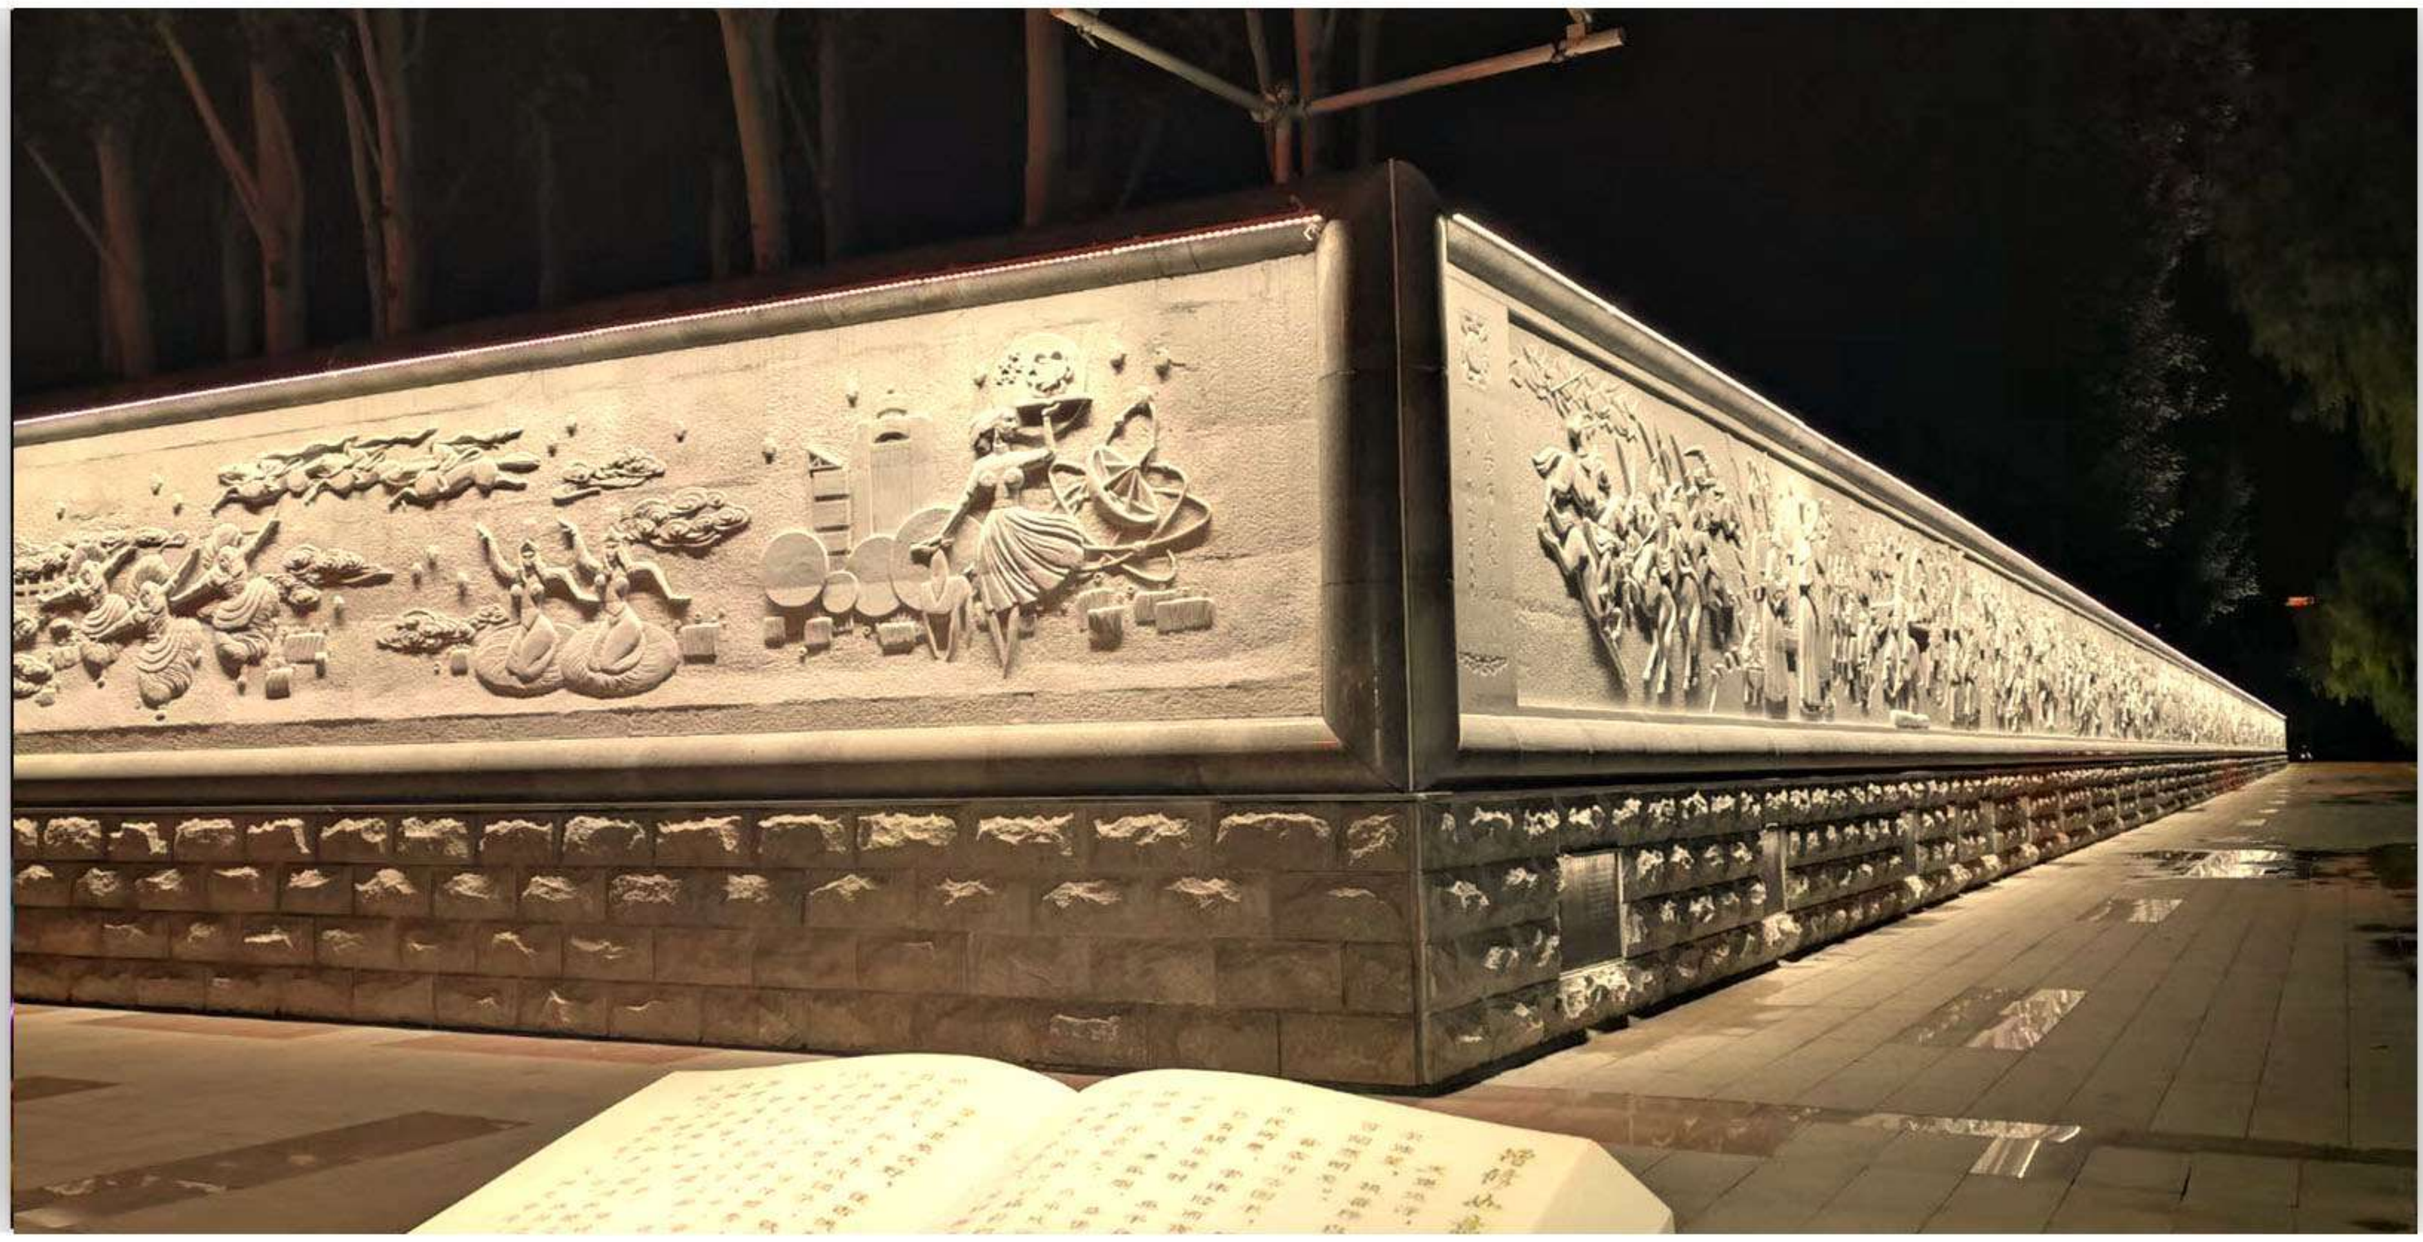

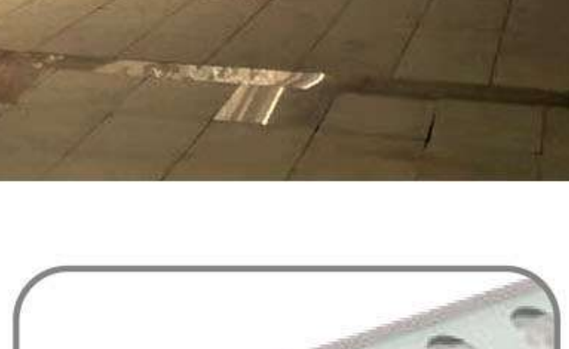

JX-XQD014

**Product Size:** (unit: mm)±5mm

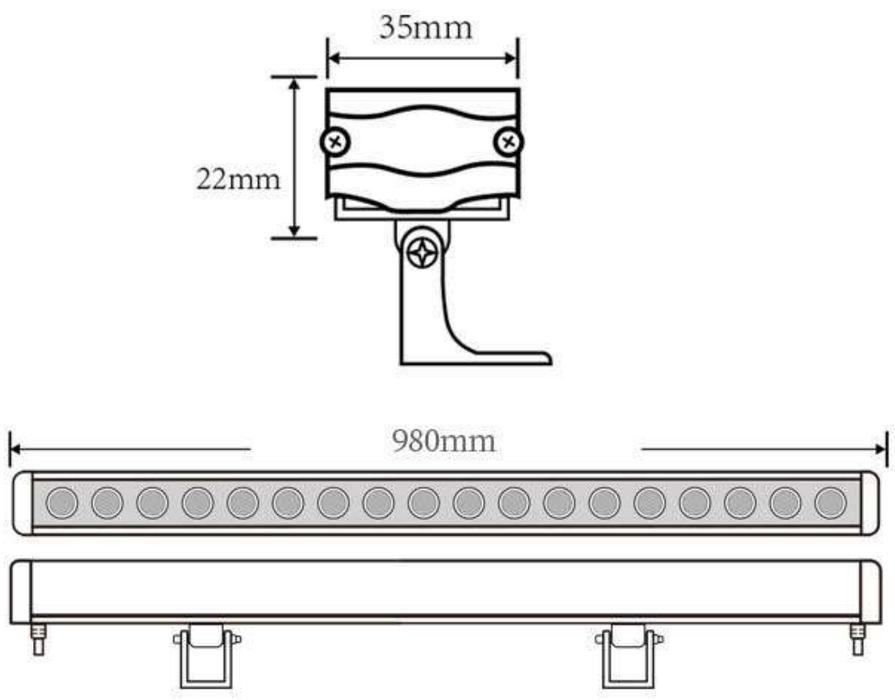


## PRODUCT INFORMATION

| | |
|---|---|
| Voltage(V) | DC24V |
| Wattage(W) | 18W 24W |
| LED chips | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source | SMD5050/SMD3535 |
| Working Temperature | —22℃~+58℃ |
| Lamp Life | >30000Hours |
| Beam Angle | 30°-45°-60° |
| Adjustable Angle | YES |
| IP Rate | IP65 |
| CCT | W/WW/Y/DMX512RGB/DMX512RGBW |

JX-XQD015

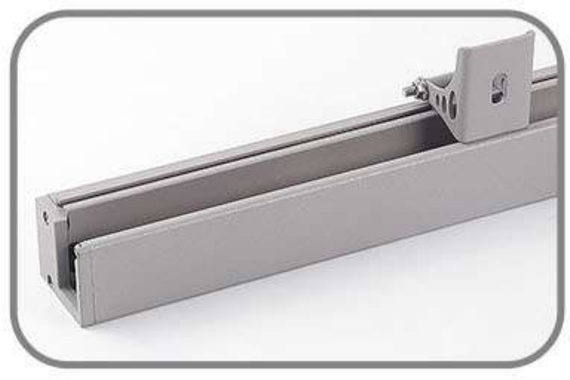

**Product Size:** (unit: mm)±5mm

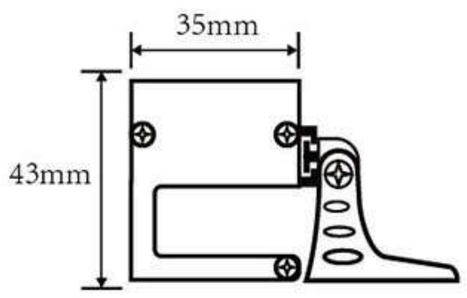


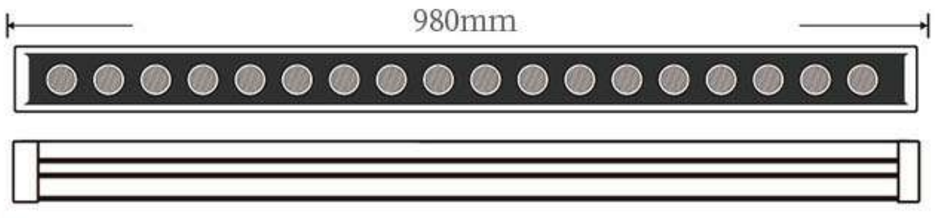


## PRODUCT INFORMATION

| | |
|---|---|
| Voltage(V) | DC24V |
| Wattage(W) | 18W 24W 36W |
| LED chips | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source | SMD5050/SMD3535 |
| Working Temperature | —22℃~+58℃ |
| Lamp Life | >30000Hours |
| Beam Angle | 15°-30°-45°-60°/10*60°/15*45°/20*40° |
| Adjustable Angle | YES |
| IP Rate | IP65 |
| CCT | W/WW/Y/DMX512RGB/DMX512RGBW |

JX-XQD016

**Product Size：** (unit: mm) ±5mm

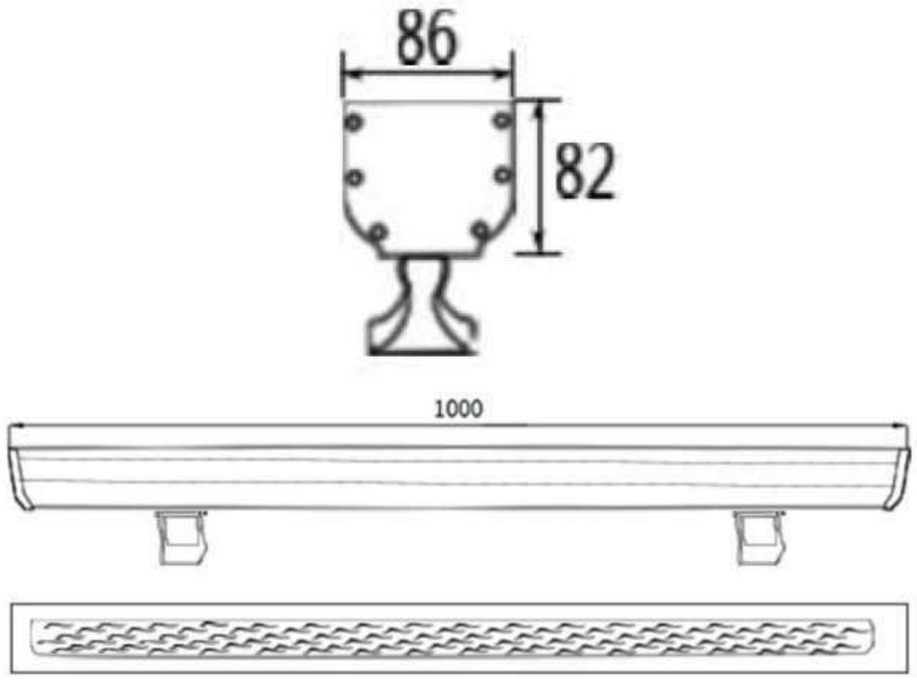


## PRODUCT INFORMATION

| | |
|---|---|
| Voltage(V) | DC24V |
| Wattage(W) | 36W/48W/60W/80W |
| LED chips | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source | Puri/Osram |
| Working Temperature | —22℃~+58℃ |
| Lamp Life | >30000Hours |
| Beam Angle | 45°/60° |
| Adjustable Angle | YES |
| IP Rate | IP66 |

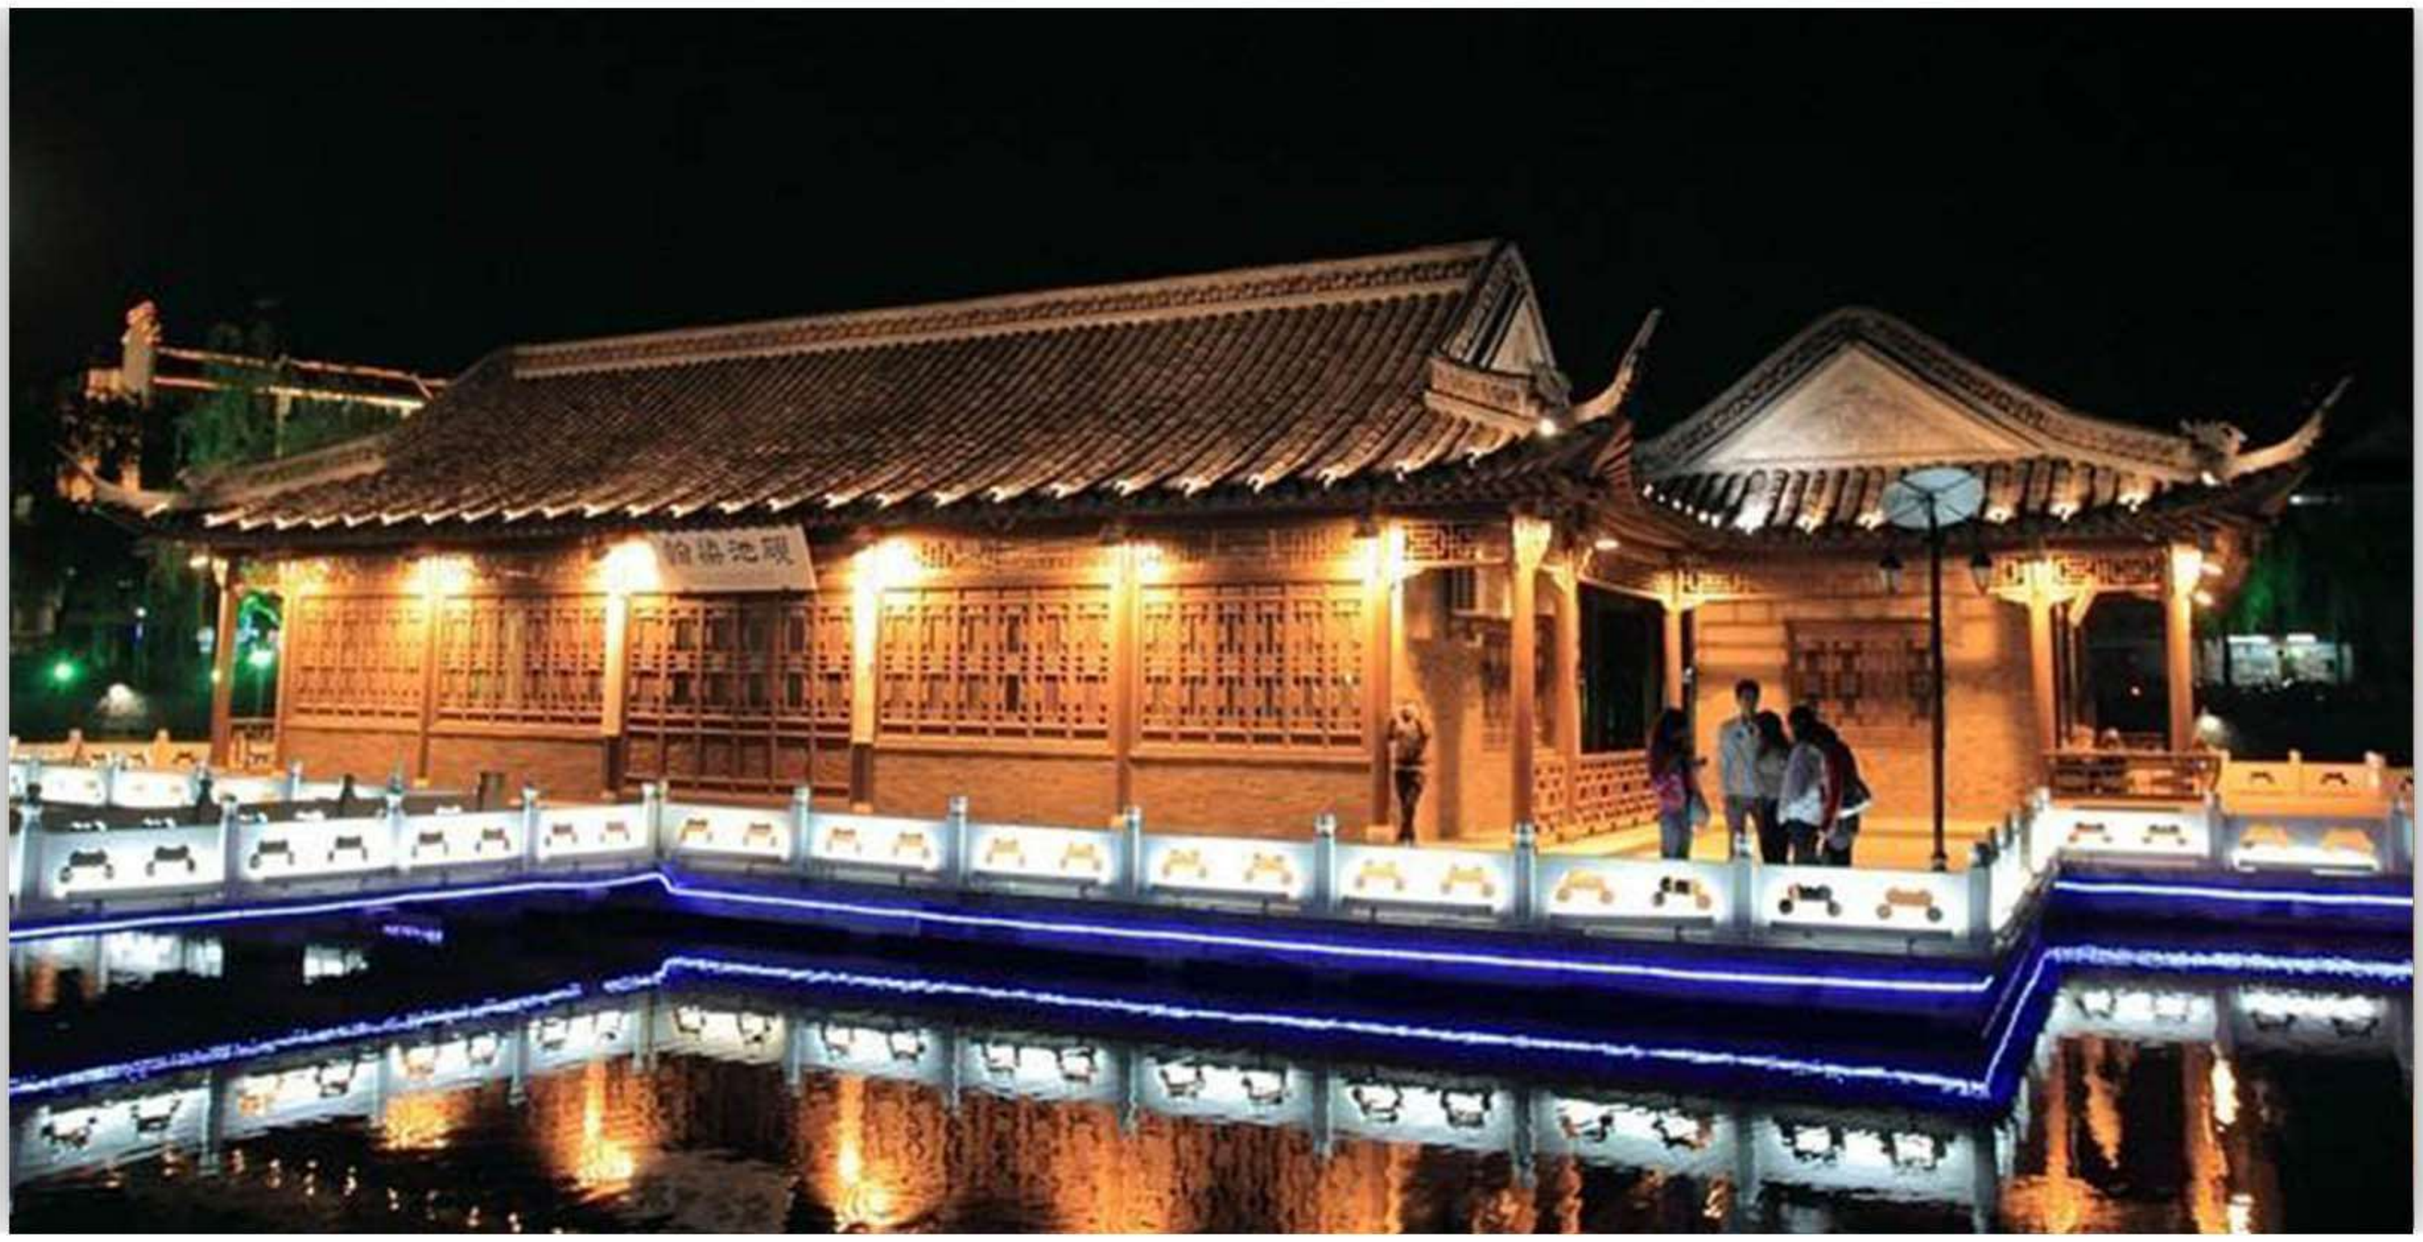

JX-XQD017

## Product Size: (unit: mm) ±5mm

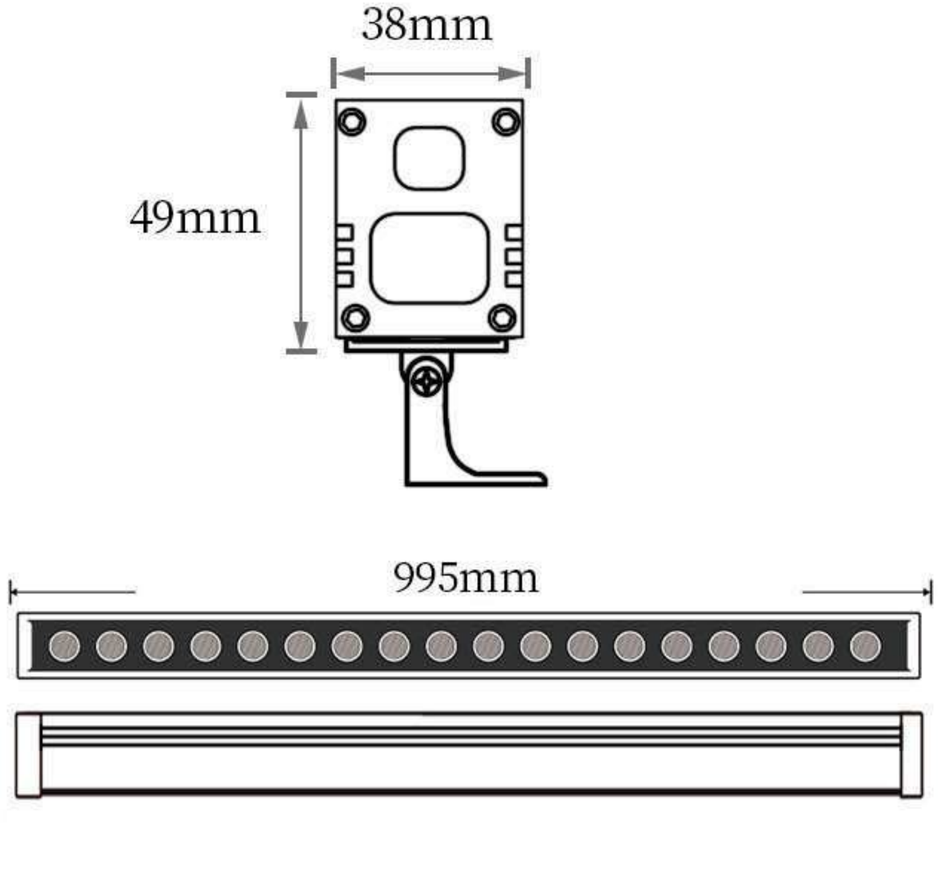


## PRODUCT INFORMATION

| | |
|---|---|
| Voltage(V) | AC85-265V |
| Wattage(W) | 18W 24W 36W |
| LED chips | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source | SMD3030 |
| Working Temperature | —22℃~+58℃ |
| Lamp Life | >30000Hours |
| Beam Angle | 15°/30°/45°/60°/10*60°/15*45°/20*40° |
| Adjustable Angle | YES |
| IP Rate | IP65 |

JX-XQD018

## Product Size: (unit: mm) ±5mm

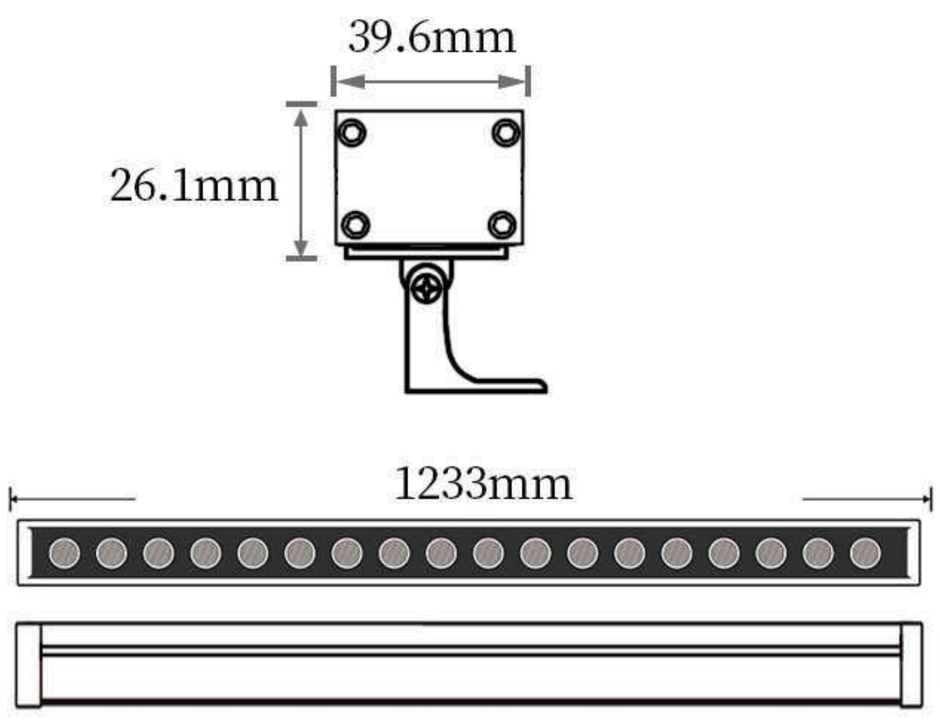


## PRODUCT INFORMATION

| | |
|---|---|
| Voltage(V) | DC24V |
| Wattage(W) | 30W |
| LED chips | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source | SMD5050/SMD3535 |
| Working Temperature | —22℃~+58℃ |
| Lamp Life | >30000Hours |
| Beam Angle | 15°/30°/45°/60°/10*60°/15*45°/20*40° |
| Adjustable Angle | YES |
| IP Rate | IP65 |