




JX-XQD001

Product Size: (unit: mm)±5mm

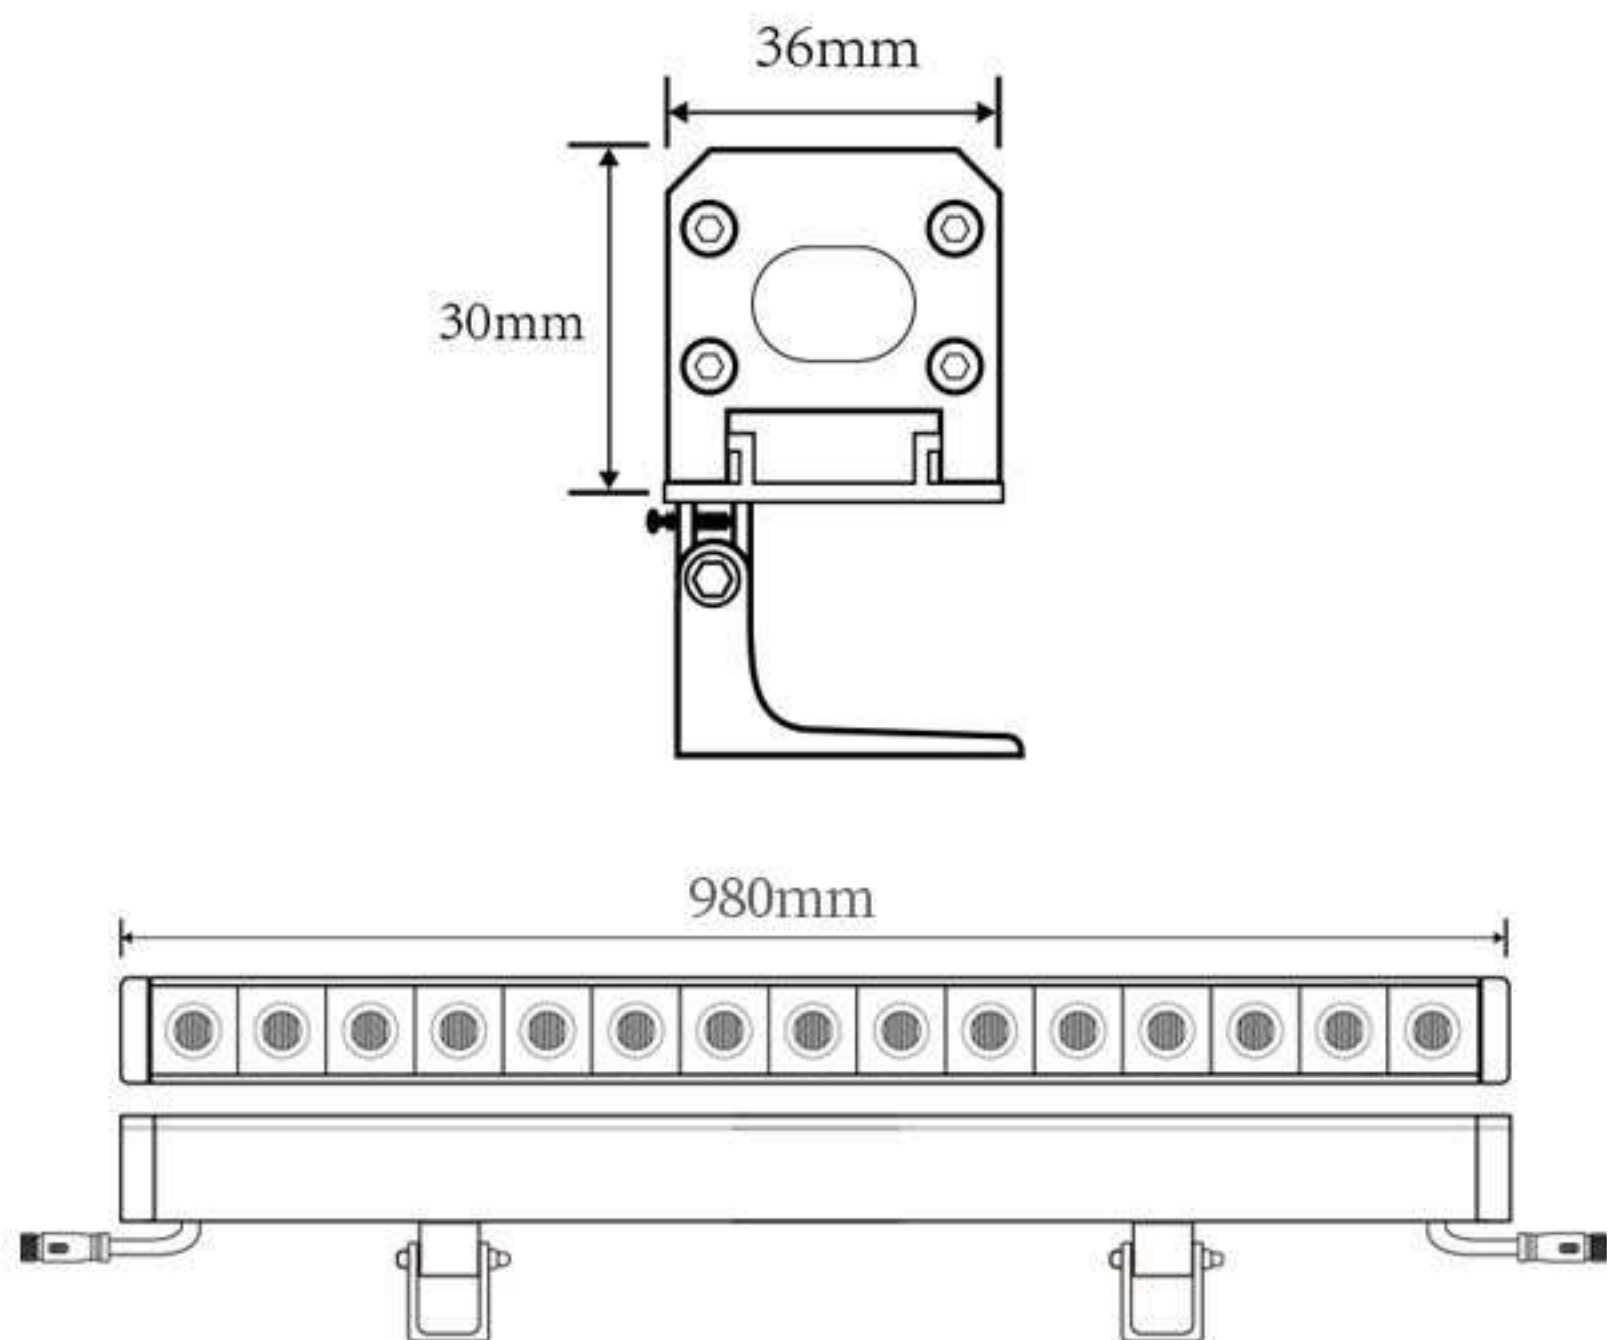

PRODUCT INFORMATION

|                     |                                         |
|---------------------|-----------------------------------------|
| Voltage(V)          | DC24V                                   |
| Wattage(W)          | 18W 24W 36W                             |
| LED chips           | Bridgelux/Philips/Sanan/Cree/Epistar    |
| Light source        | SMD3030                                 |
| Working Temperature | -22℃~+58℃                               |
| Lamp Life           | >30000Hours                             |
| Beam Angle          | 15°-30°-45°-60°/10°*60°/15°*45°/20°*40° |
| Adjustable Angle    | YES                                     |
| IP Rate             | IP65                                    |
| CCT                 | W/WW/Y/DMX512RGB/DMX512RGBW             |






JX-XQD002



Product Size: (unit: mm)±5mm

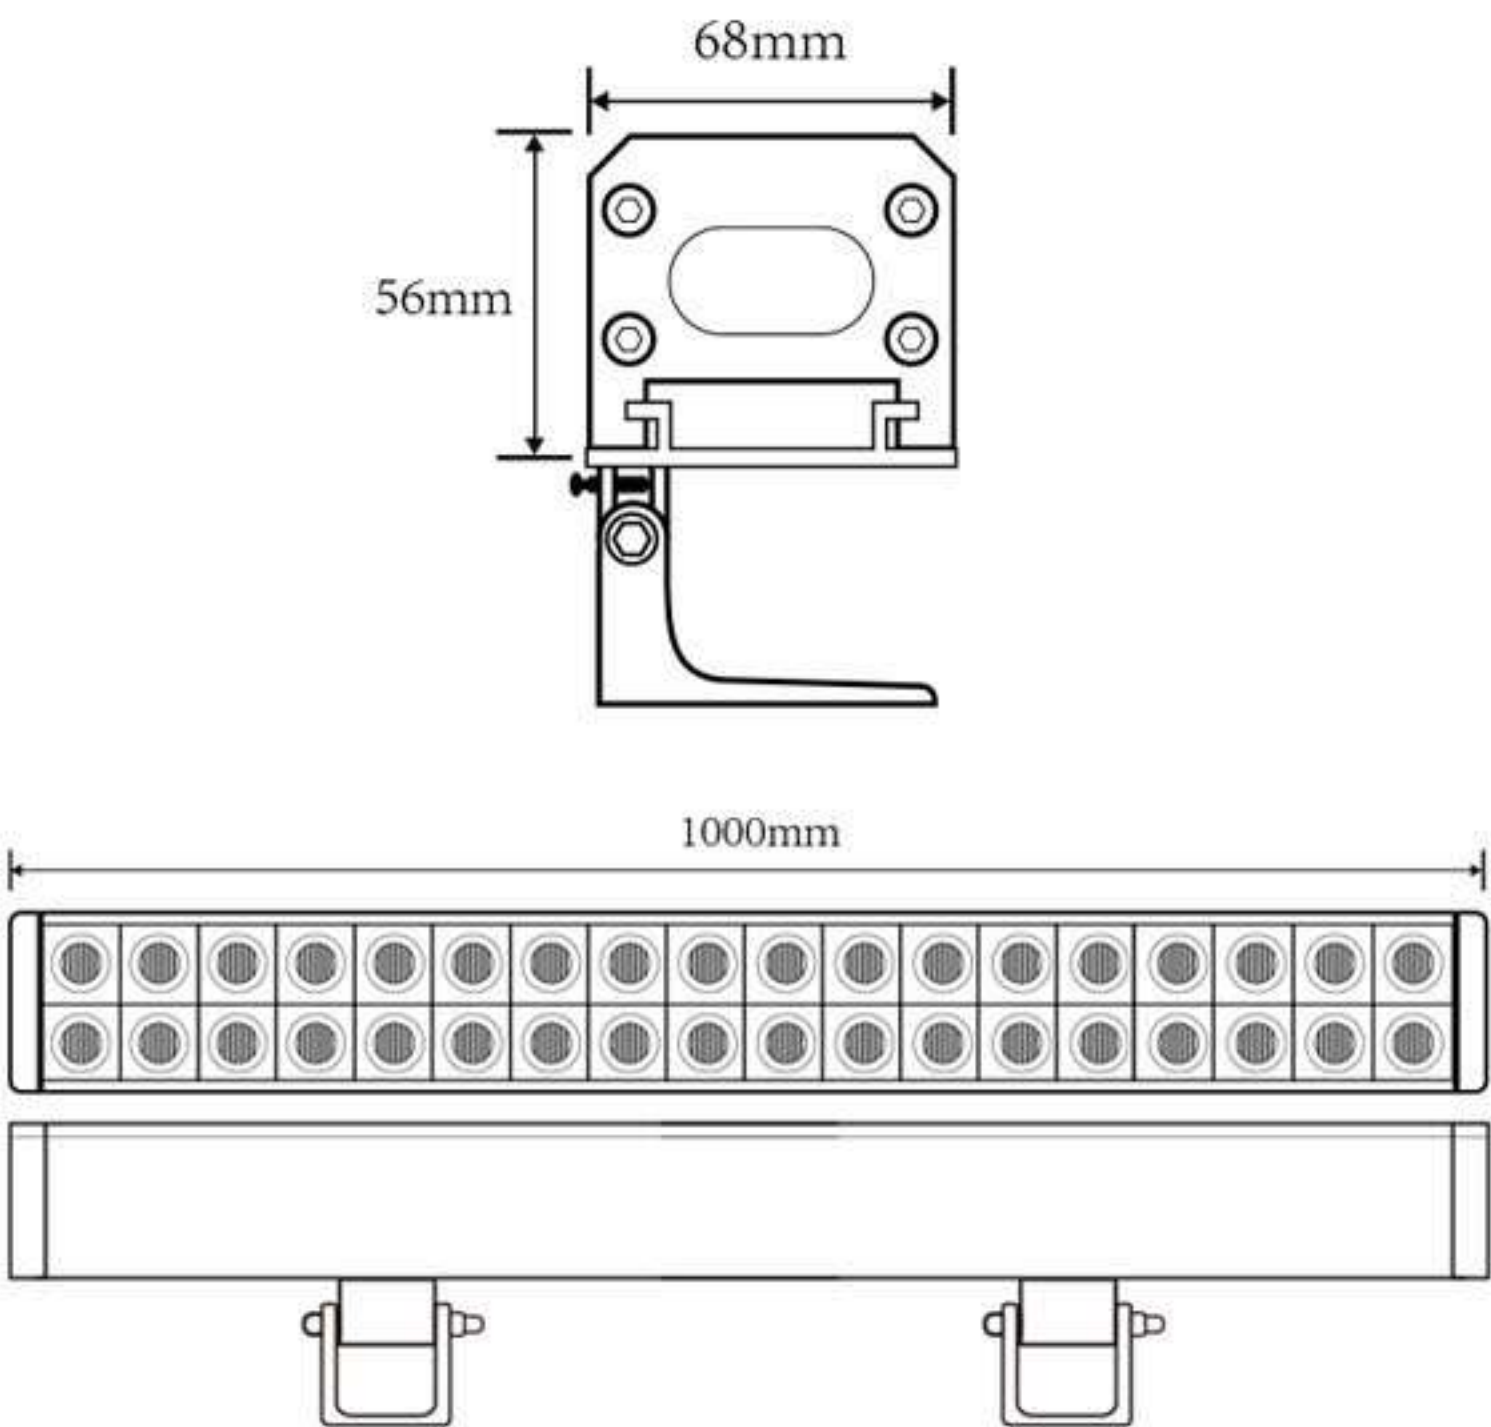

PRODUCT INFORMATION


|                     |                                      |
|---------------------|--------------------------------------|
| Voltage(V)          | DC24V                                |
| Wattage(W)          | 18W 24W 36W 72W                      |
| LED chips           | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source        | SMD3030                              |
| Working Temperature | -22°C~+58°C                          |
| Lamp Life           | >30000Hours                          |
| Beam Angle          | 15°-30°-45°-60°/10°60°/15°45°/20°40° |
| Adjustable Angle    | YES                                  |
| IP Rate             | IP65                                 |
| CCT                 | W/WW/Y/DMX512RGB/DMX512RGBW          |





JX-XQD003


Product Size: (unit: mm)±5mm

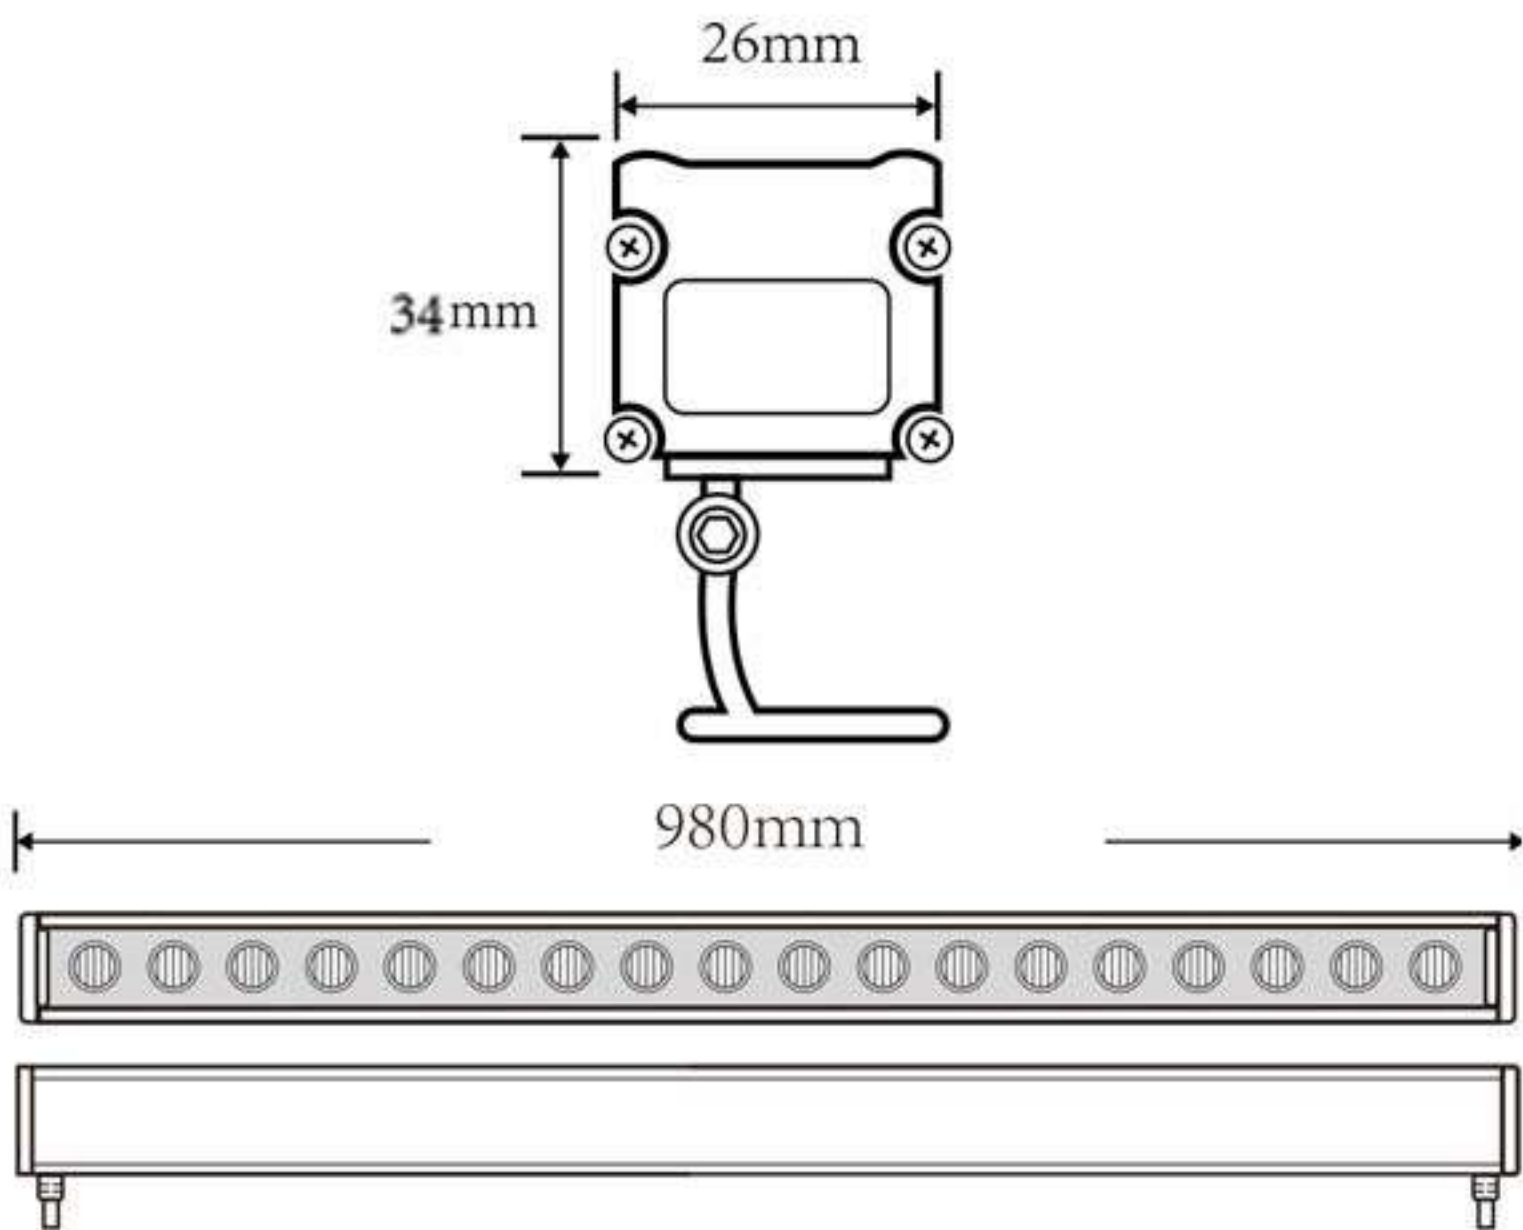

PRODUCT INFORMATION


|                     |                                      |
|---------------------|--------------------------------------|
| Voltage(V)          | DC24V                                |
| Wattage(W)          | 18W 24W 36W                          |
| LED chips           | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source        | SMD3030/SMD2835                      |
| Working Temperature | -22℃~+58℃                            |
| Lamp Life           | >30000Hours                          |
| Beam Angle          | 15/30/45/60 degree                   |
| Adjustable Angle    | YES                                  |
| IP Rate             | IP65                                 |
| CCT                 | W/WW/Y/DMX512RGB/DMX512RGBW          |



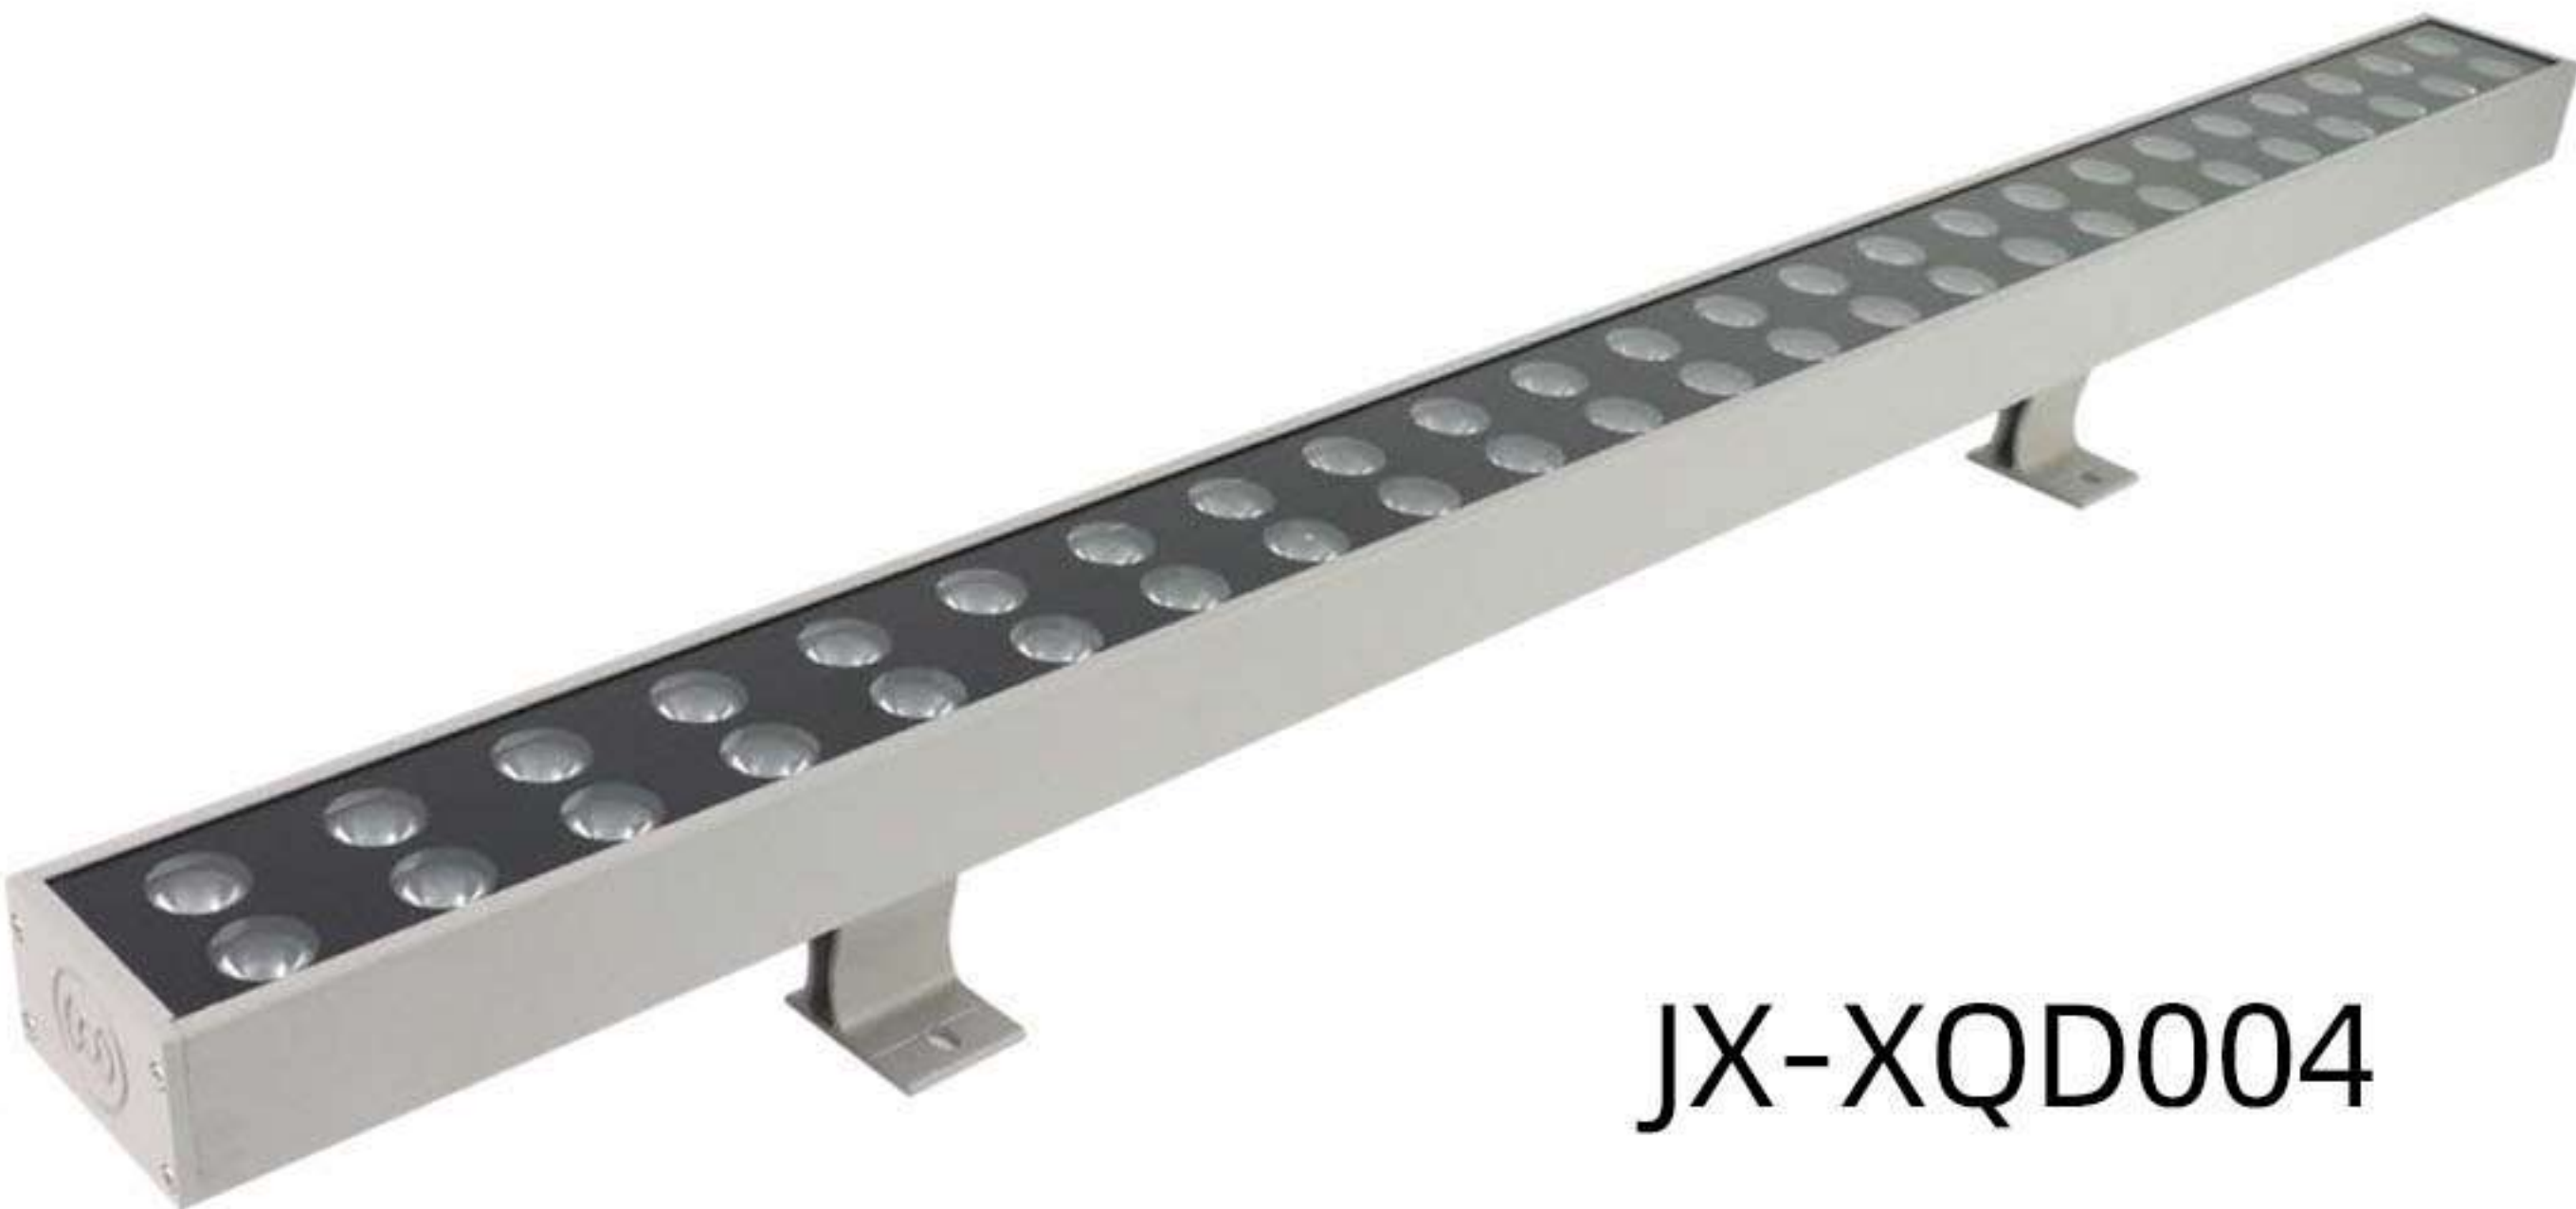

JX-XQD004

Product Size: (unit: mm)±5mm

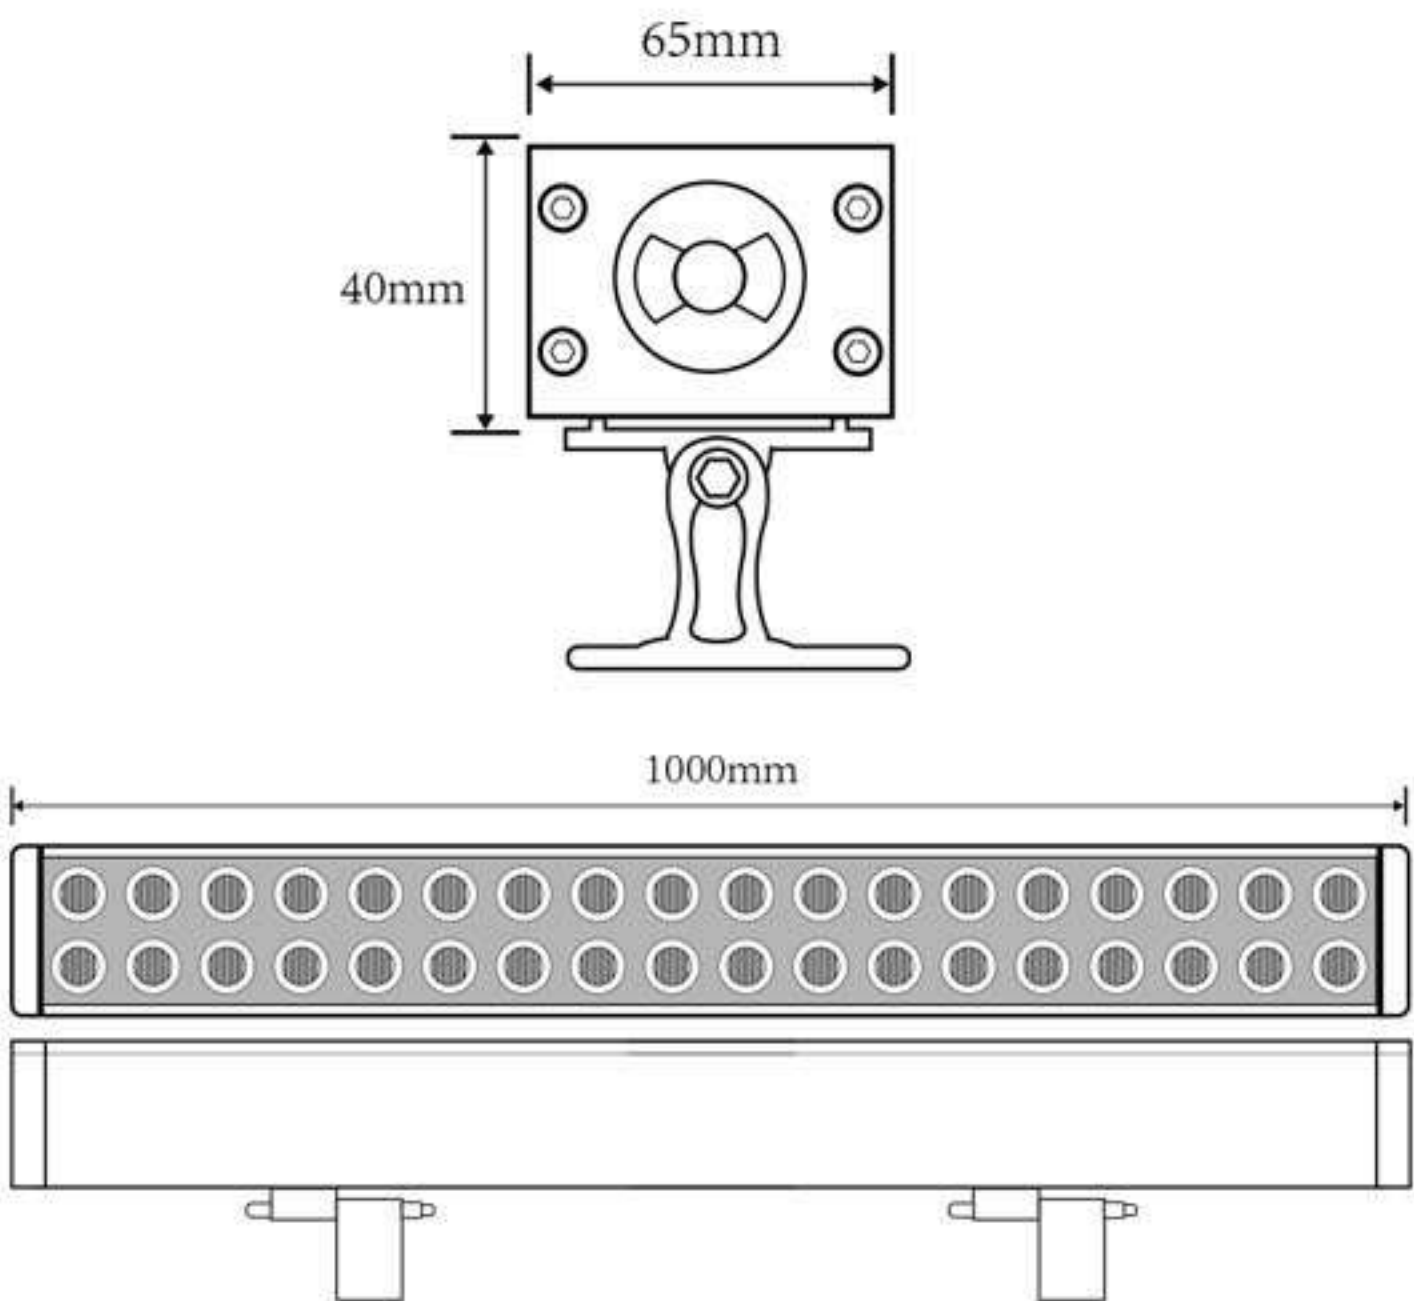

PRODUCT INFORMATION


|                     |                                      |
|---------------------|--------------------------------------|
| Voltage(V)          | DC24V                                |
| Wattage(W)          | 48W                                  |
| LED chips           | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source        | SMD5050/SMD3535                      |
| Working Temperature | -22℃~+58℃                            |
| Lamp Life           | >30000Hours                          |
| Beam Angle          | 15°-30°-45°-60°/10°60°/15°45°/20°40° |
| Adjustable Angle    | YES                                  |
| IP Rate             | IP65                                 |
| CCT                 | W/WW/Y/DMX512RGB/DMX512RGBW          |





JX-XQD005

Product Size: (unit: mm)±5mm

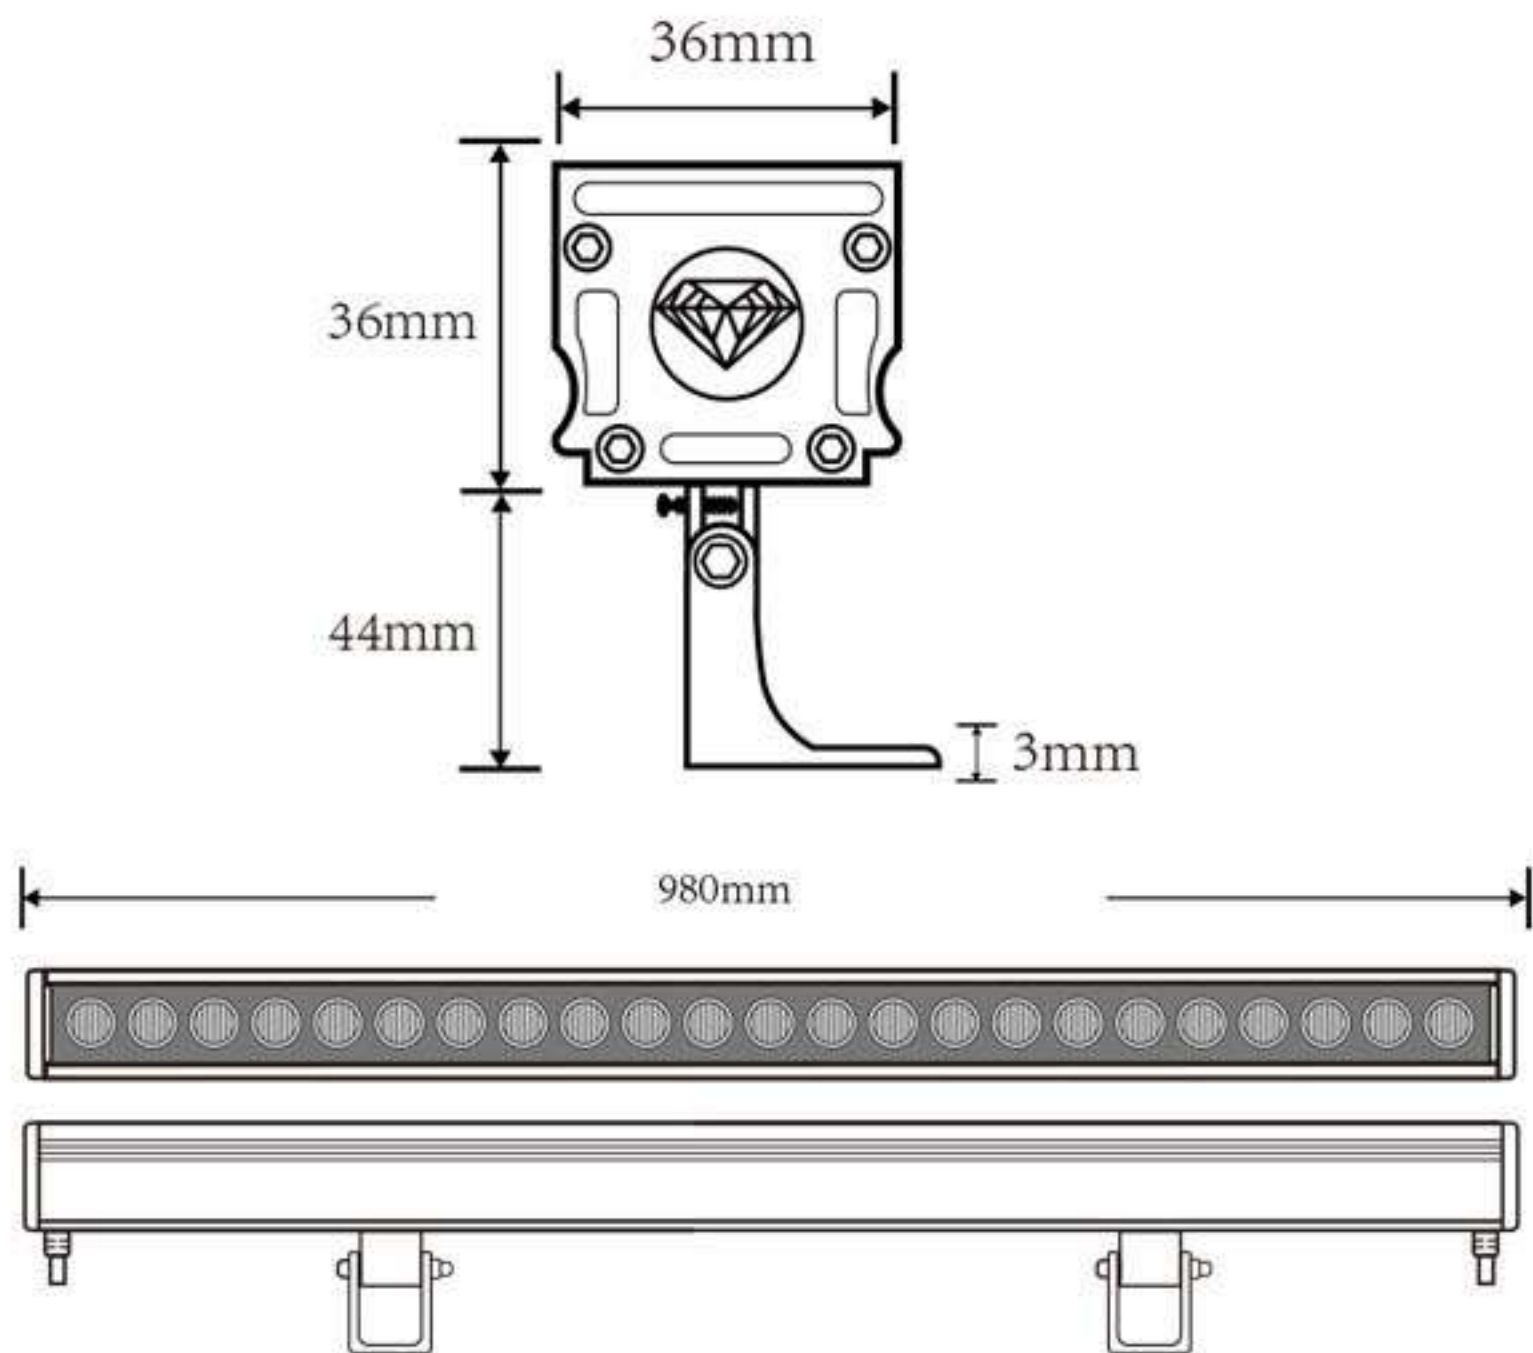

PRODUCT INFORMATION


|                     |                                      |
|---------------------|--------------------------------------|
| Voltage(V)          | DC24V                                |
| Wattage(W)          | 18W 24W 36W                          |
| LED chips           | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source        | SMD5050/SMD3535/SMD3030              |
| Working Temperature | -22℃~+58℃                            |
| Lamp Life           | >30000Hours                          |
| Beam Angle          | 15°-30°-45°-60°/10*60°/15*45°/20*40° |
| Adjustable Angle    | YES                                  |
| IP Rate             | IP65                                 |
| CCT                 | W/WW/Y/DMX512RGB/DMX512RGBW          |





JX-XQD006

Product Size: (unit: mm)±5mm

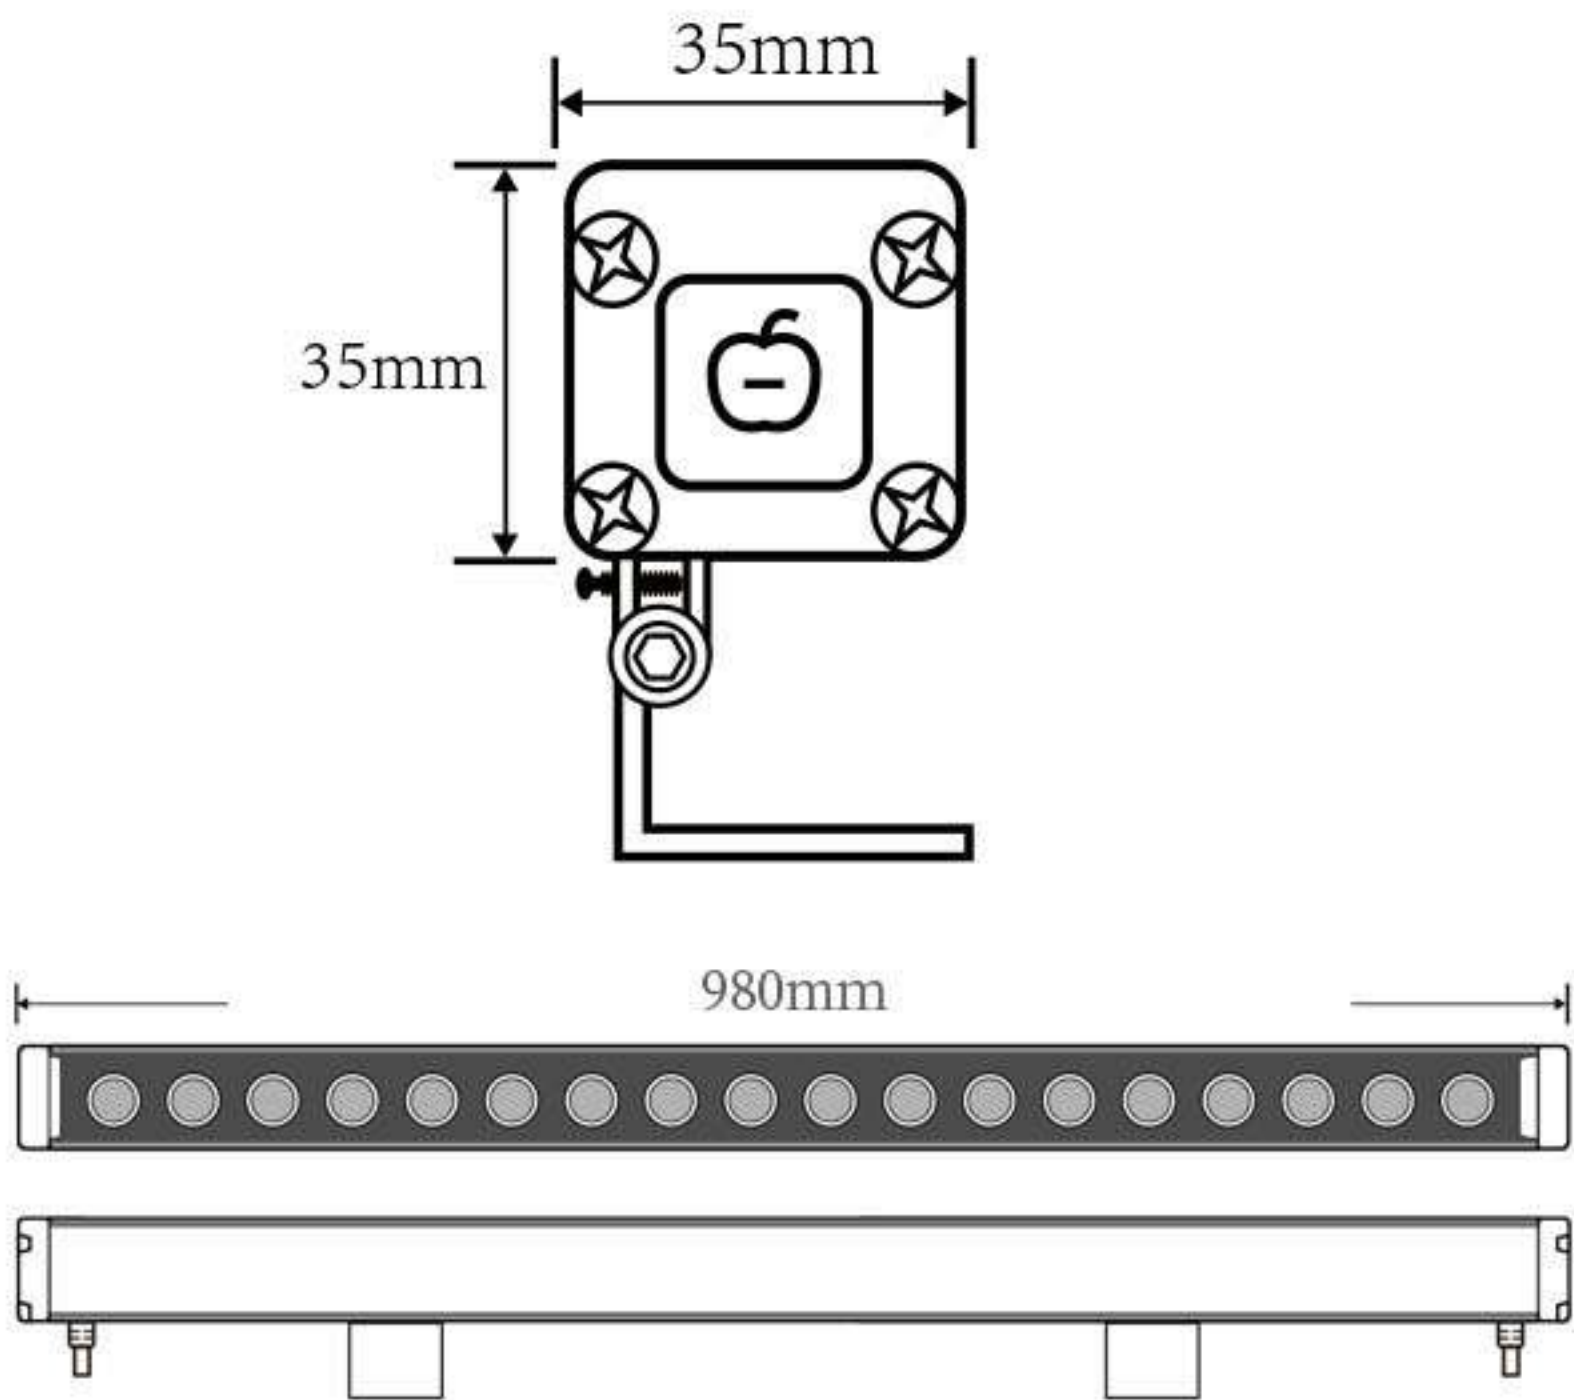

PRODUCT INFORMATION


|                     |                                         |
|---------------------|-----------------------------------------|
| Voltage(V)          | DC24V                                   |
| Wattage(W)          | 18W 24W 36W                             |
| LED chips           | Bridgelux/Philips/Sanan/Cree/Epistar    |
| Light source        | SMD5050/SMD3535/SMD3030                 |
| Working Temperature | —22℃~+58℃                               |
| Lamp Life           | >30000Hours                             |
| Beam Angle          | 15°-30°-45°-60°/10°*60°/15°*45°/20°*40° |
| Adjustable Angle    | YES                                     |
| IP Rate             | IP65                                    |
| CCT                 | W/WW/Y/DMX512RGB/DMX512RGBW             |





JX-XQD007

Product Size: (unit: mm)±5mm

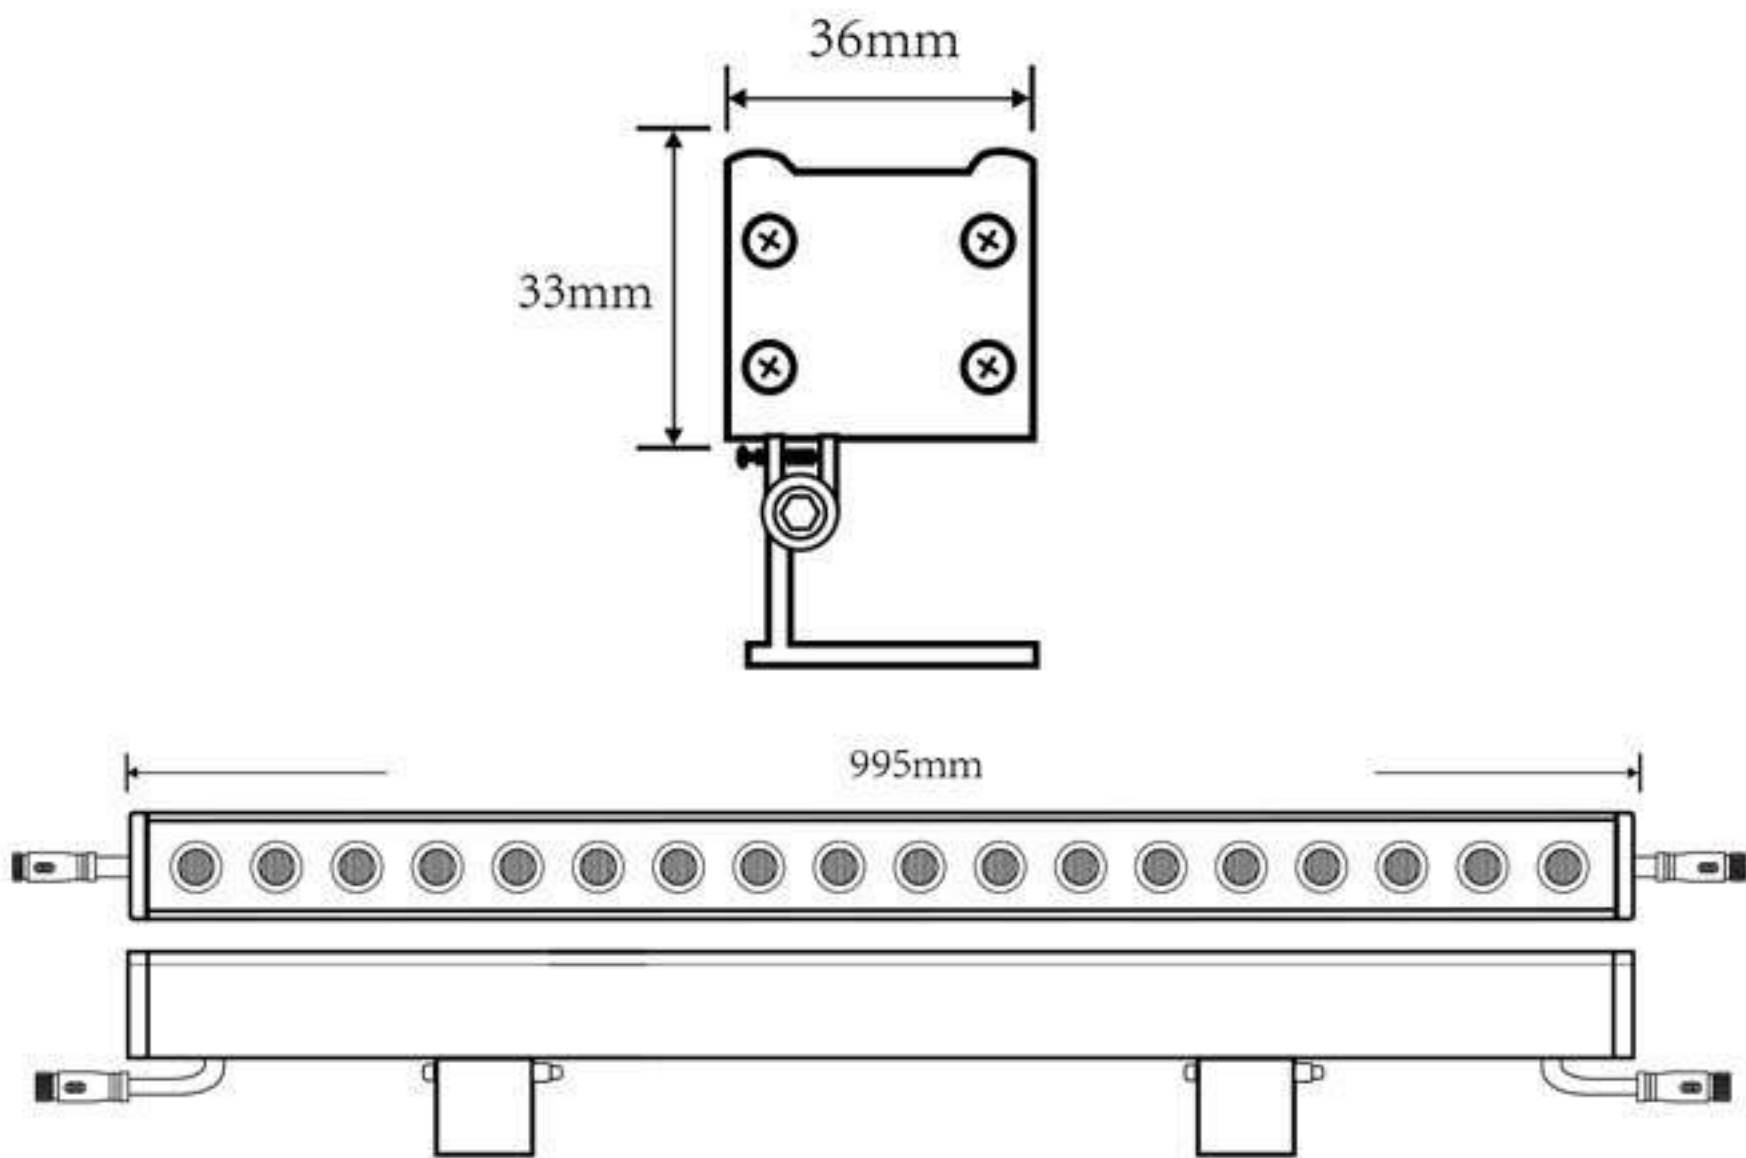

PRODUCT INFORMATION

|                     |                                      |
|---------------------|--------------------------------------|
| Voltage(V)          | DC24V                                |
| Wattage(W)          | 18W 24W 36W                          |
| LED chips           | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source        | SMD5050/SMD3535/SMD3030              |
| Working Temperature | -22℃~+58℃                            |
| Lamp Life           | >30000Hours                          |
| Beam Angle          | 15°-30°-45°-60°/10*60°/15*45°/20*40° |
| Adjustable Angle    | YES                                  |
| IP Rate             | IP65                                 |
| CCT                 | W/WW/Y/DMX512RGB/DMX512RGBW          |






JX-XQD008




Product Size: (unit: mm)±5mm

PRODUCT INFORMATION

|                     |                                      |
|---------------------|--------------------------------------|
| Voltage(V)          | DC24V                                |
| Wattage(W)          | 18W 24W 36W                          |
| LED chips           | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source        | SMD5050/SMD3535                      |
| Working Temperature | -22°C~+58°C                          |
| Lamp Life           | >30000Hours                          |
| Beam Angle          | 15/30/45/60 degree                   |
| Adjustable Angle    | YES                                  |
| IP Rate             | IP65                                 |
| CCT                 | W/WW/Y/DMX512RGB/DMX512RGBW          |

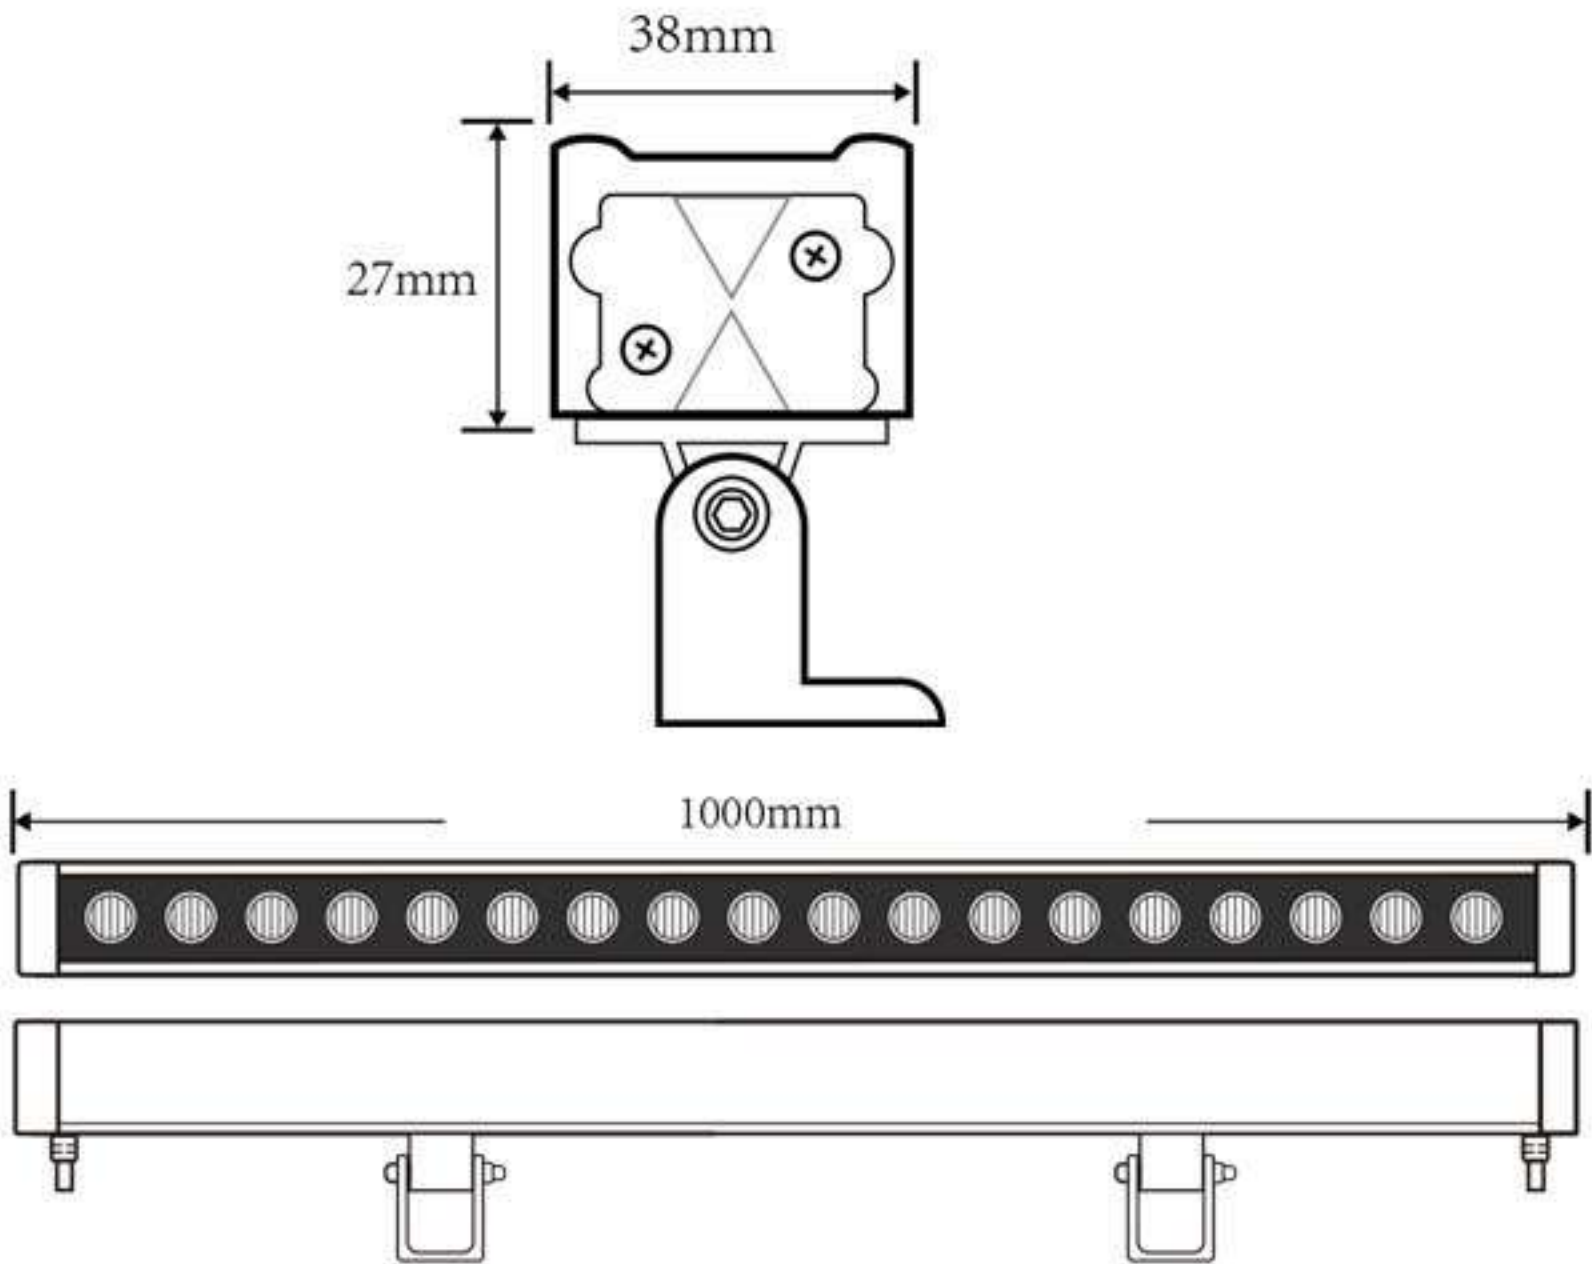




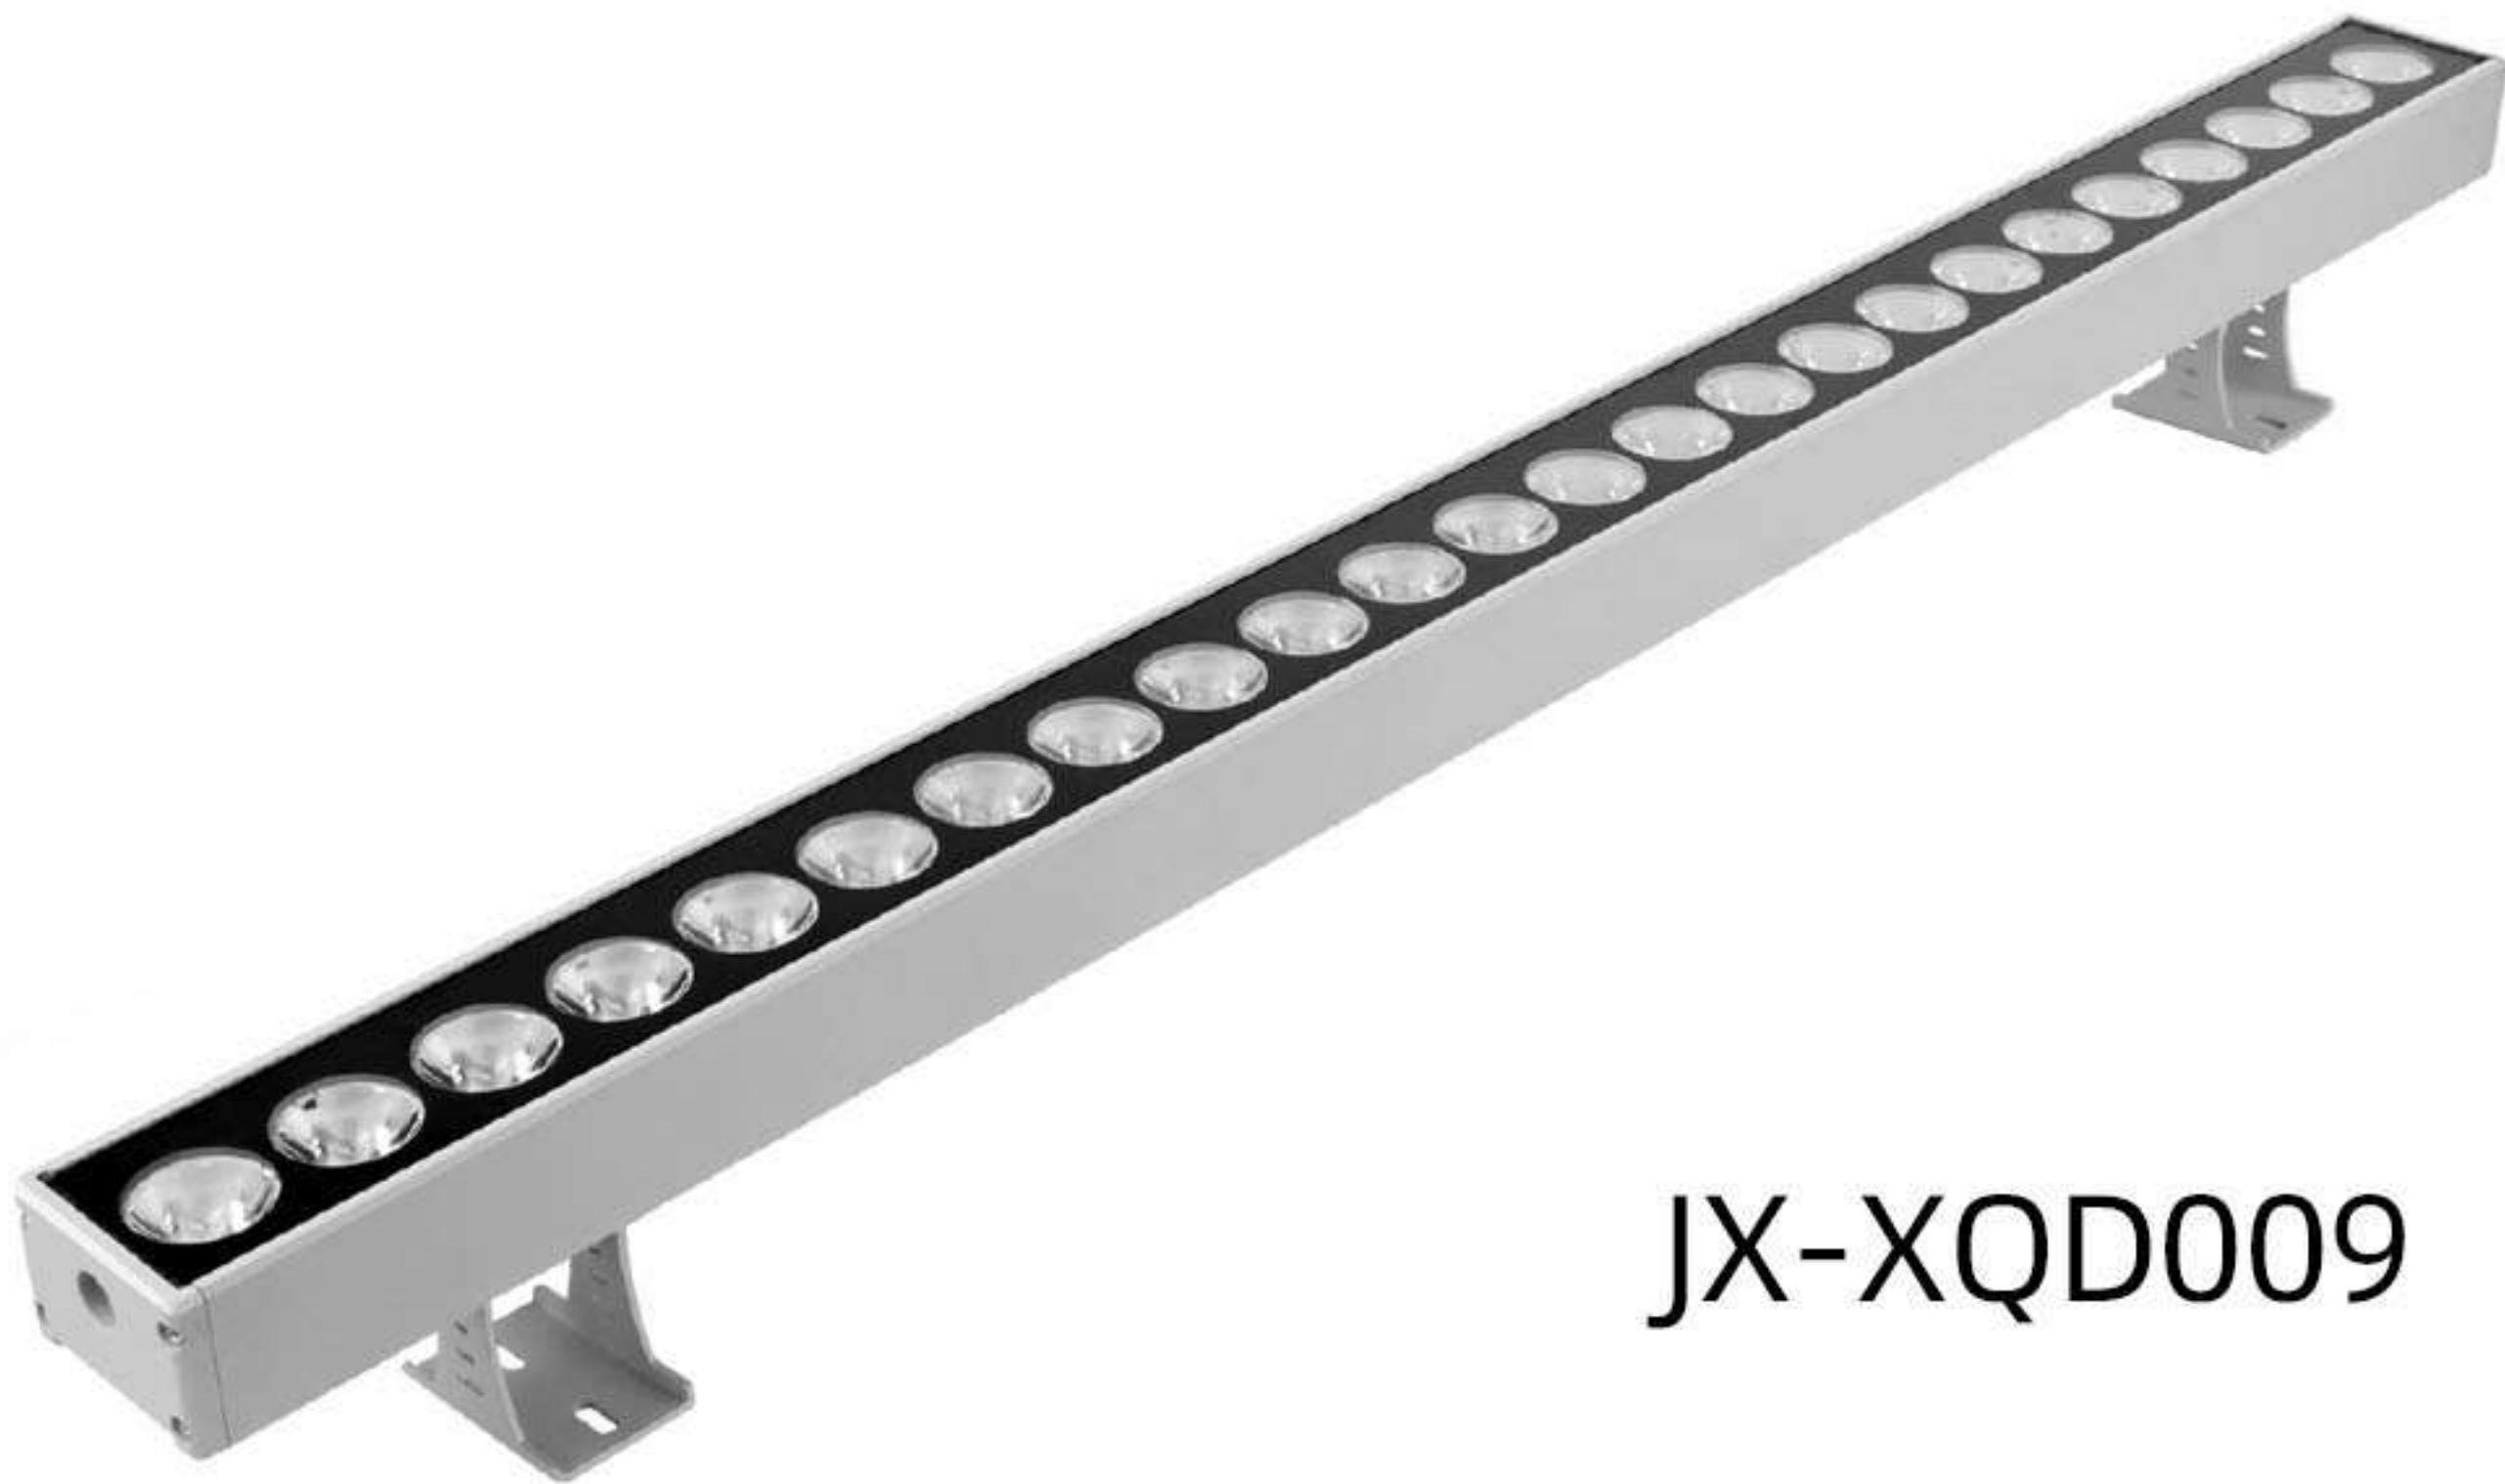

JX-XQD009

Product Size: (unit: mm)±5mm

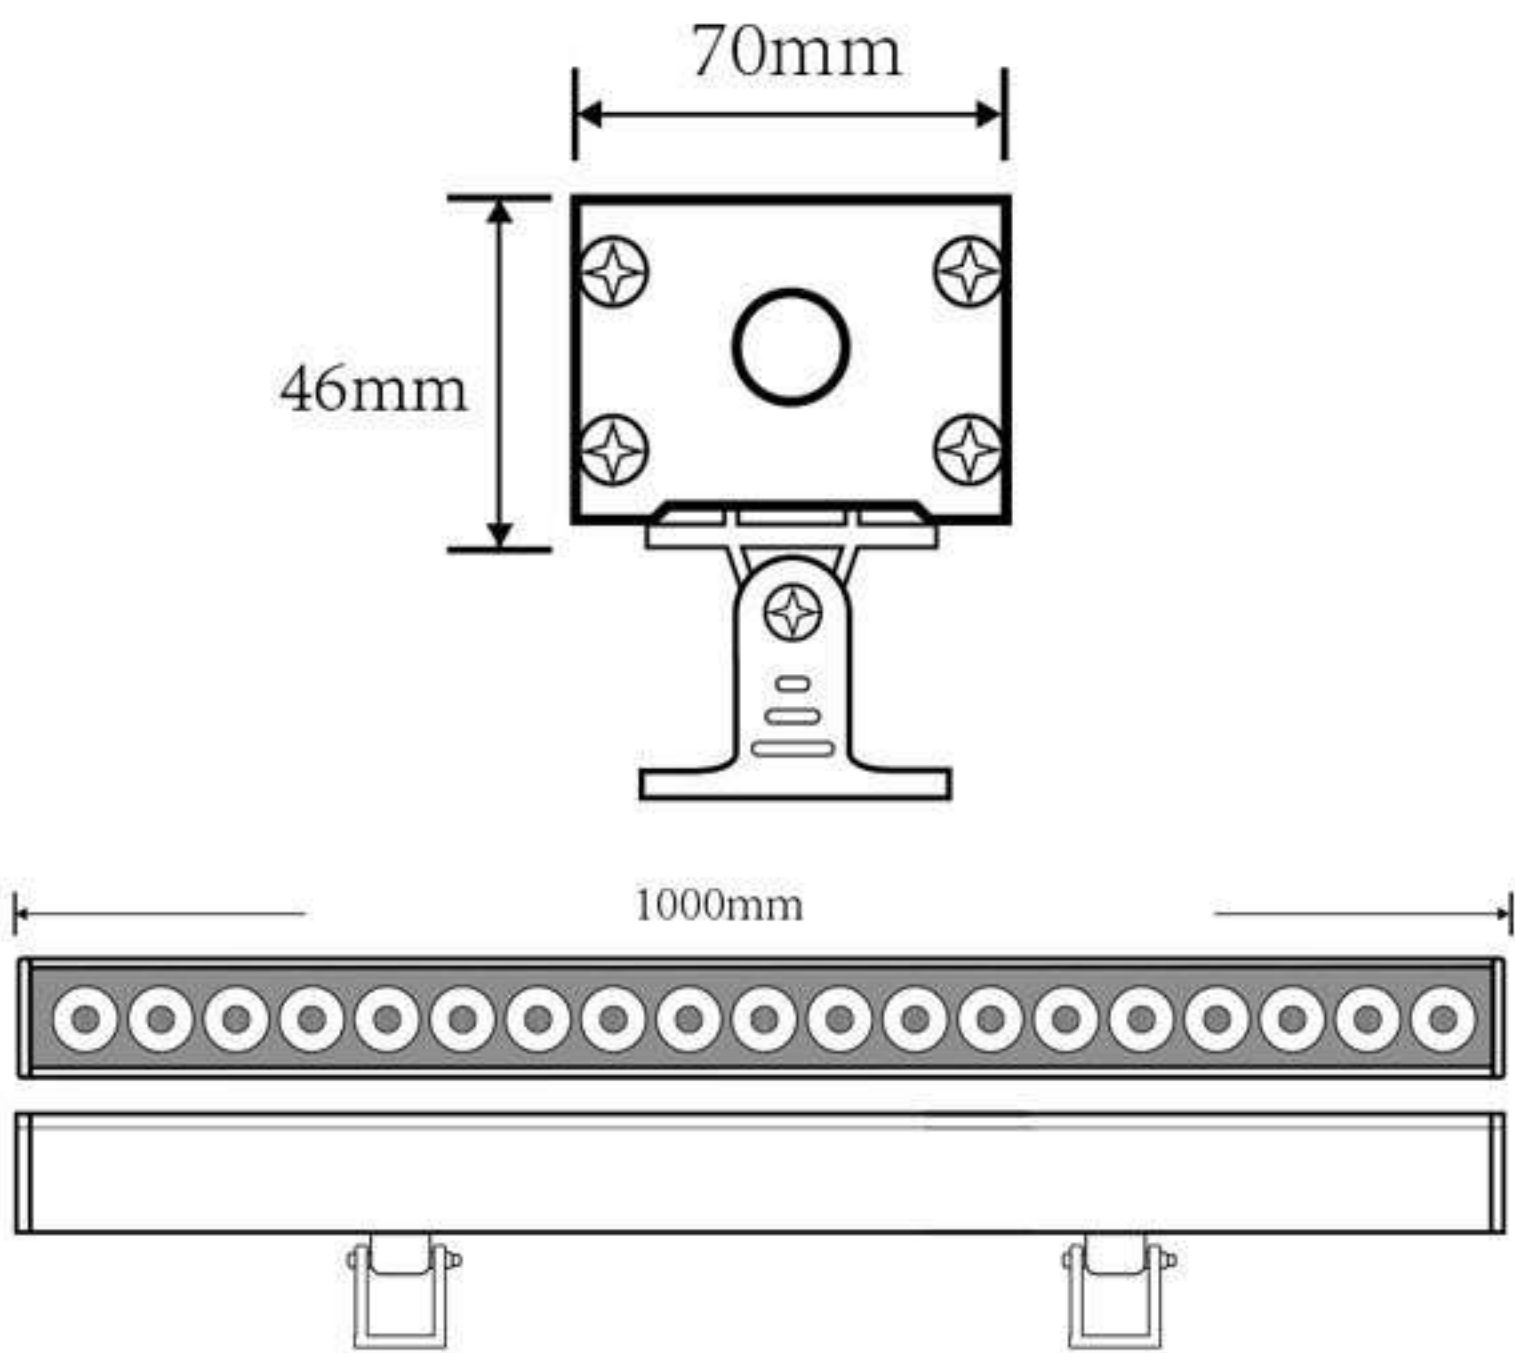

PRODUCT INFORMATION


|                     |                                      |
|---------------------|--------------------------------------|
| Voltage(V)          | DC24V                                |
| Wattage(W)          | 96W-144W                             |
| LED chips           | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source        | CREE                                 |
| Working Temperature | -20(°C)to +68 (°C)                   |
| Lamp Life           | >30000Hours                          |
| Beam Angle          | 3Degree                              |
| Adjustable Angle    | YES                                  |
| IP Rate             | IP65                                 |
| CCT                 | W/WW/Y/DMX512RGB/DMX512RGBW          |





JX-XQD010

Product Size: (unit: mm)±5mm

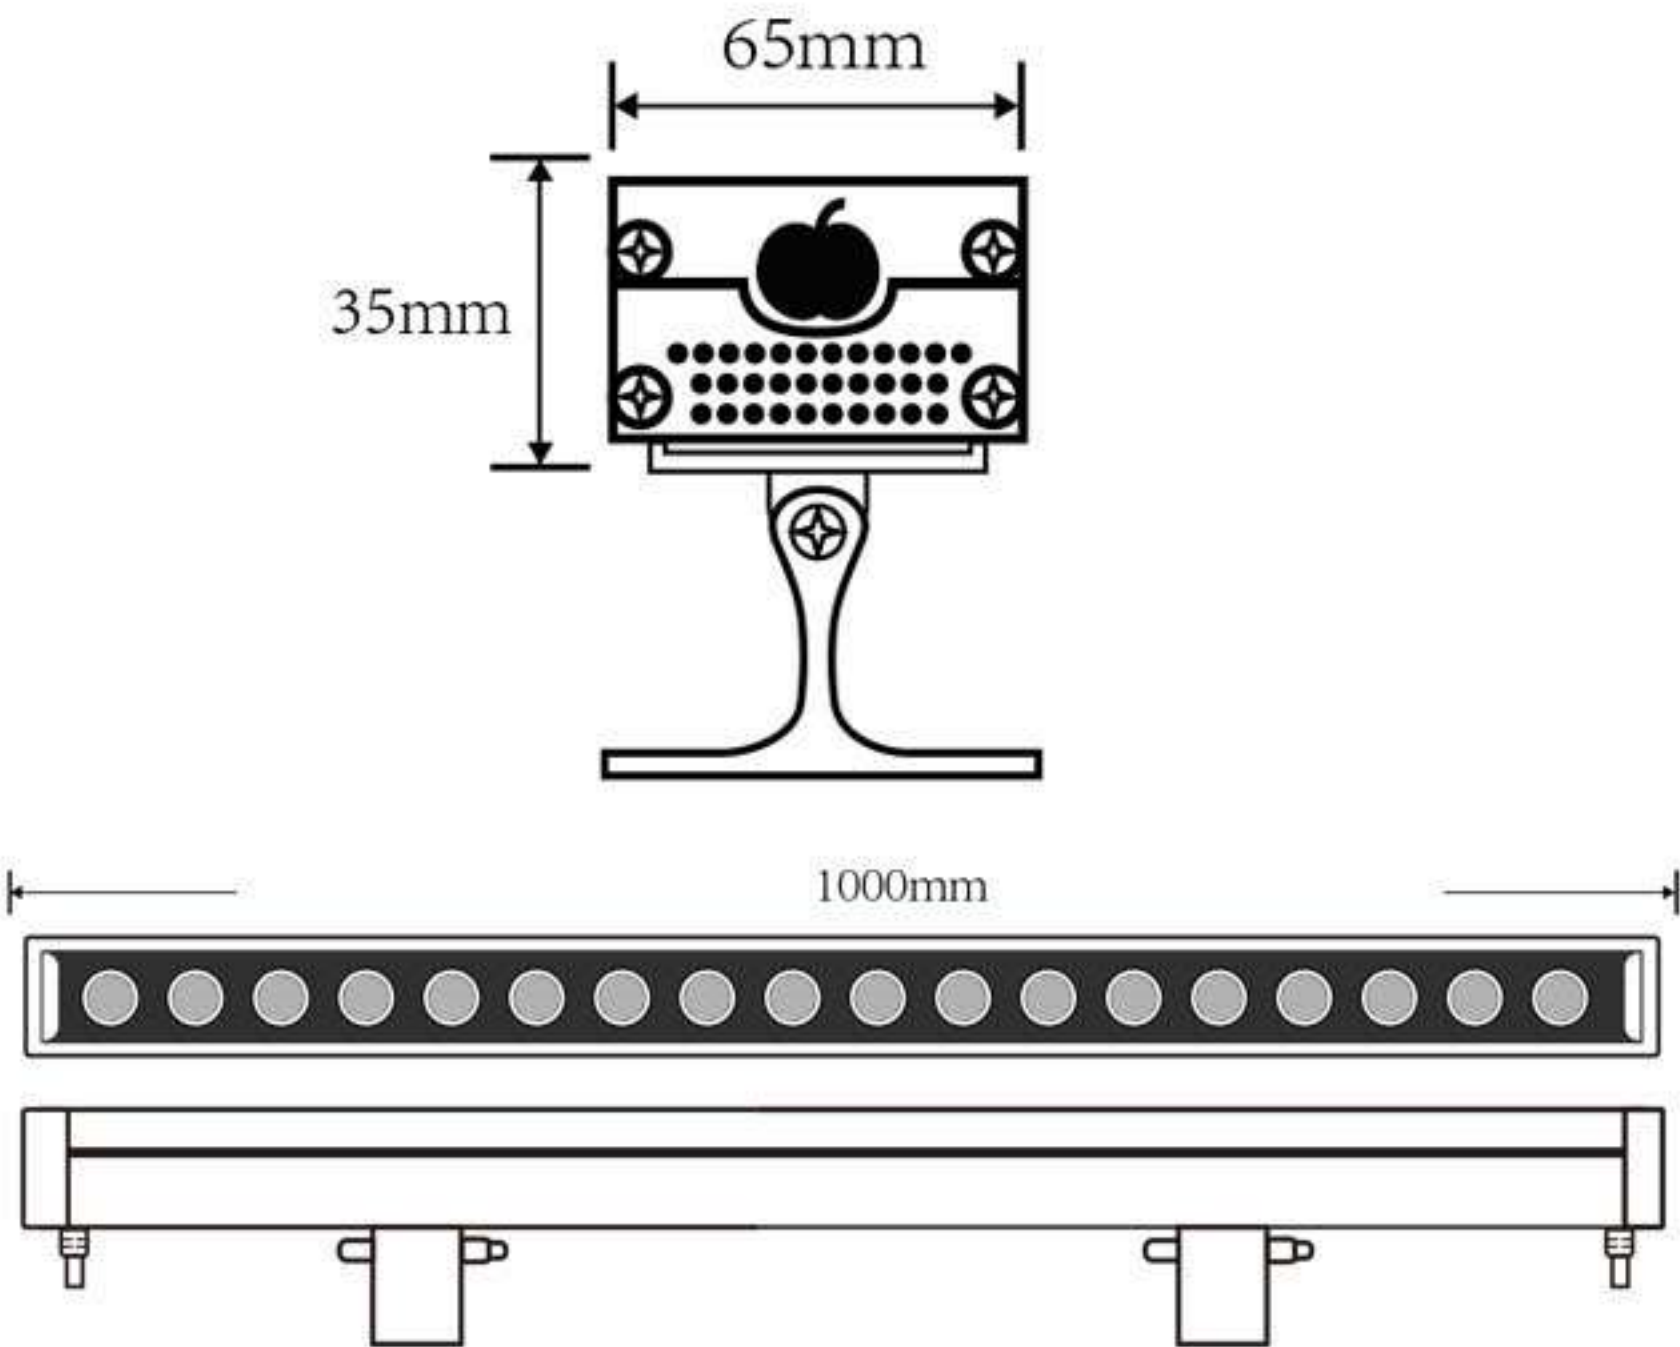

PRODUCT INFORMATION


|                     |                                      |
|---------------------|--------------------------------------|
| Voltage(V)          | DC24V                                |
| Wattage(W)          | 18W 24W 36W                          |
| LED chips           | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source        | SMD5050/SMD3535                      |
| Working Temperature | -22℃~+58℃                            |
| Lamp Life           | >30000Hours                          |
| Beam Angle          | 15/30/45/60 degree                   |
| Adjustable Angle    | YES                                  |
| IP Rate             | IP65                                 |
| CCT                 | W/WW/Y/DMX512RGB/DMX512RGBW          |





JX-XQD011

Product Size: (unit: mm)±5mm

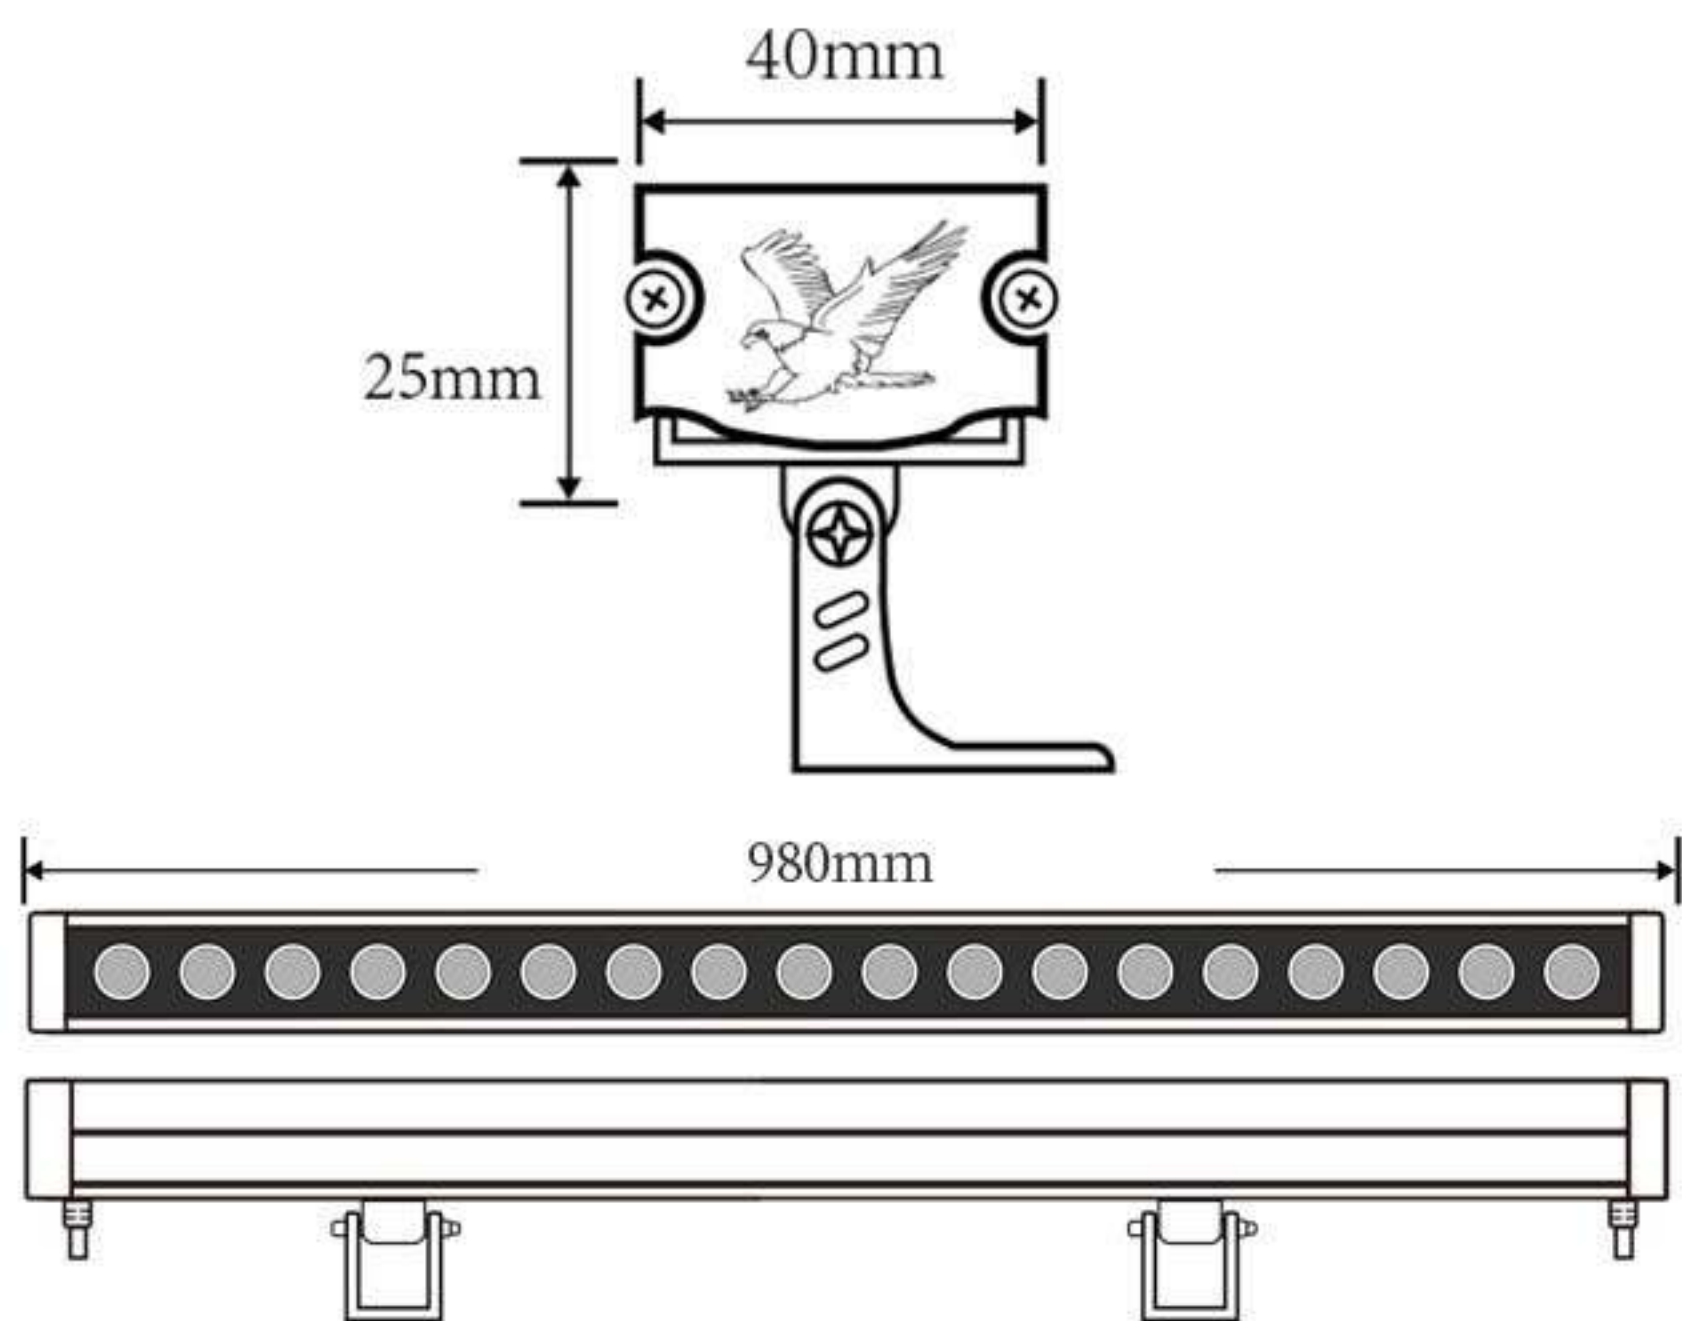

PRODUCT INFORMATION

|                     |                                 |
|---------------------|---------------------------------|
| Voltage(V)          | DC24V                           |
| Wattage(W)          | 18W 24W                         |
| LED chips           | Bridgelux/Philips/Sanan/Epistar |
| Light source        | SMD3030/SMD2835                 |
| Bean Angle          | 30°-45°-60°                     |
| Working Temperature | -22℃~+58℃                       |
| Lamp Life           | >30000Hours                     |
| Adjustable Angle    | YES                             |
| IP Rate             | IP65                            |
| CCT                 | W/WW/Y                          |






JX-XQD012



Product Size: (unit: mm)±5mm

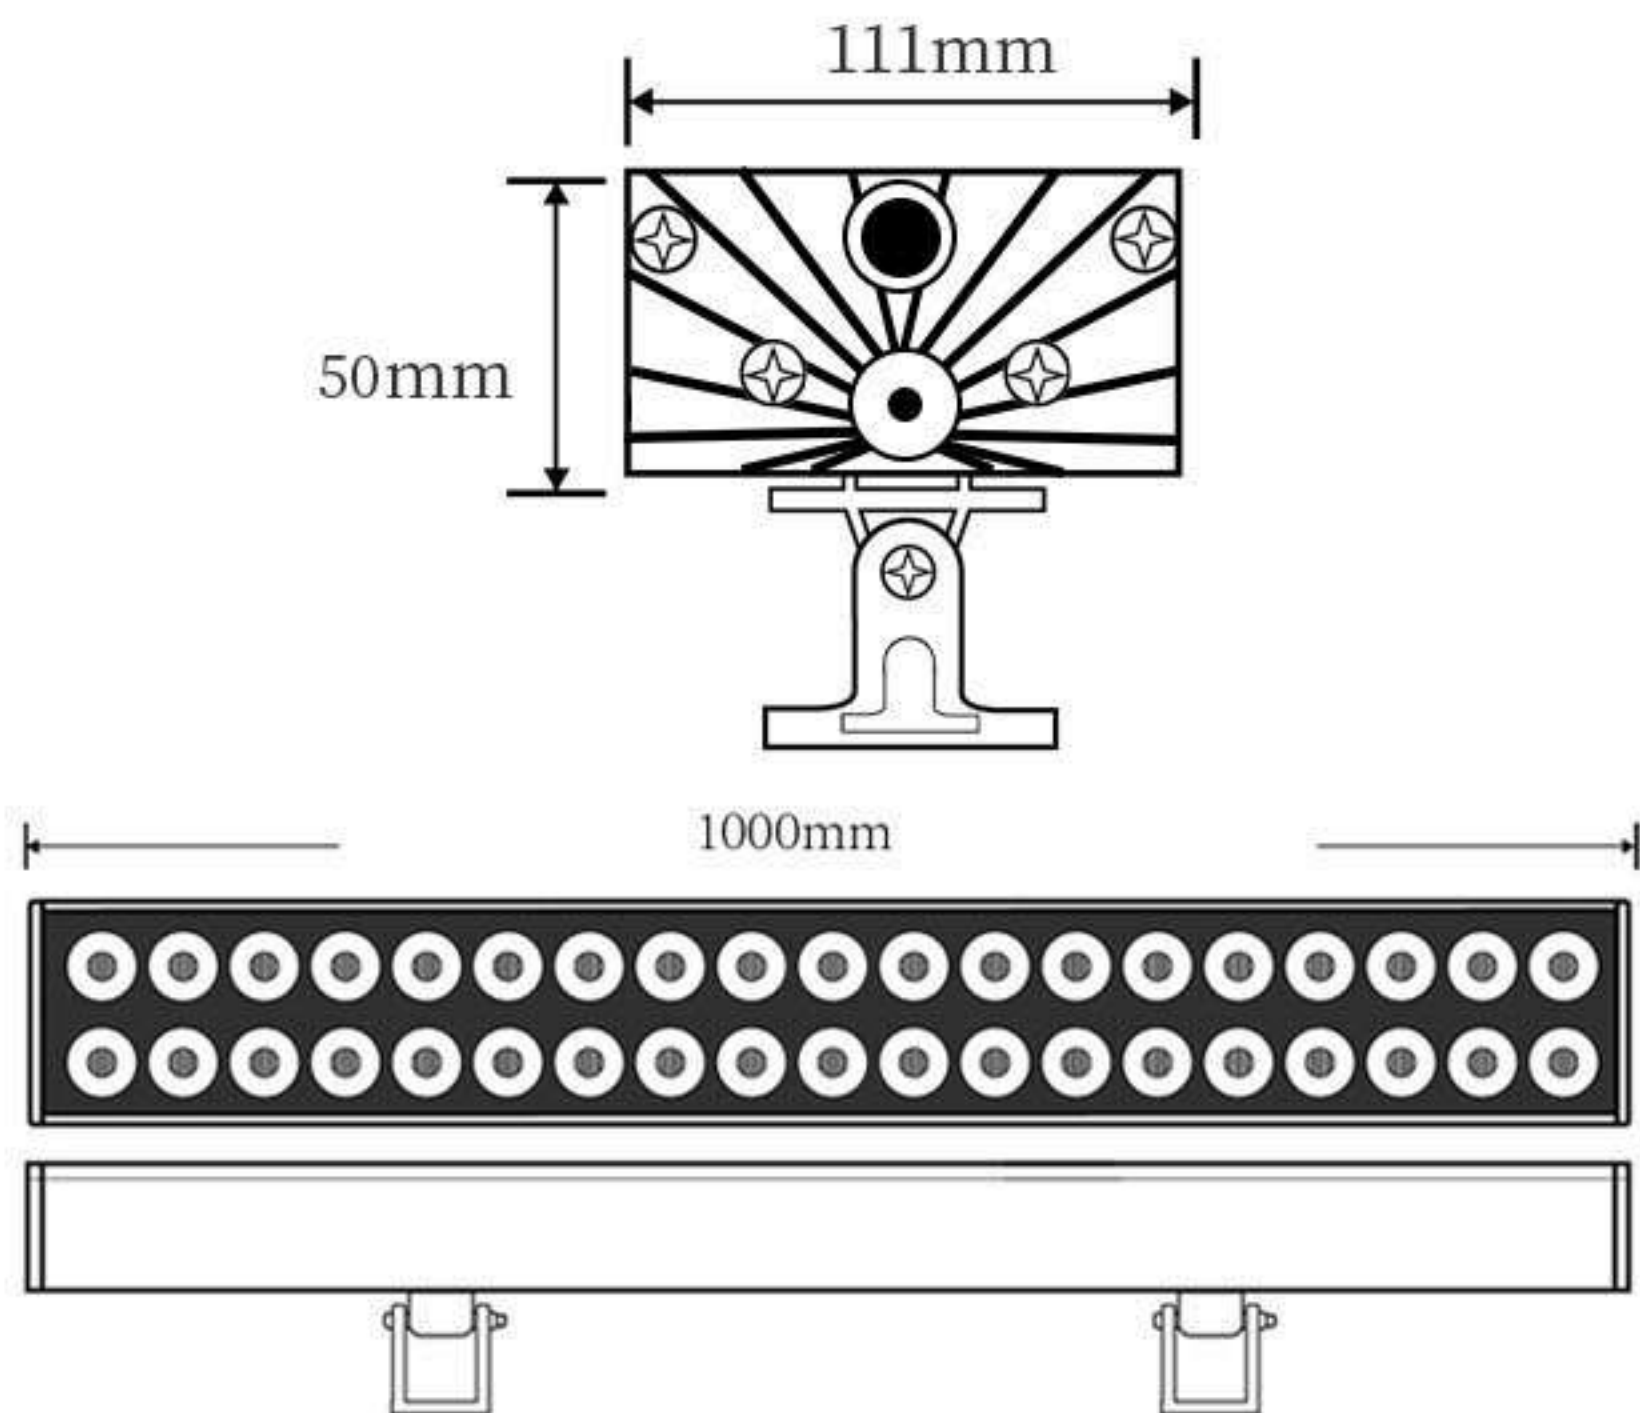

PRODUCT INFORMATION


|                     |                                      |
|---------------------|--------------------------------------|
| Voltage(V)          | DC24V                                |
| Wattage(W)          | 96W-144W                             |
| LED chips           | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source        | CREE                                 |
| Working Temperature | -20 (°C)to +68 (°C)                  |
| Lamp Life           | >30000Hours                          |
| Beam Angle          | 3Degree                              |
| Adjustable Angle    | YES                                  |
| IP Rate             | IP65                                 |
| CCT                 | W/WW/Y/DMX512RGB/DMX512RGBW          |





JX-XQD013


Product Size: (unit: mm)±5mm

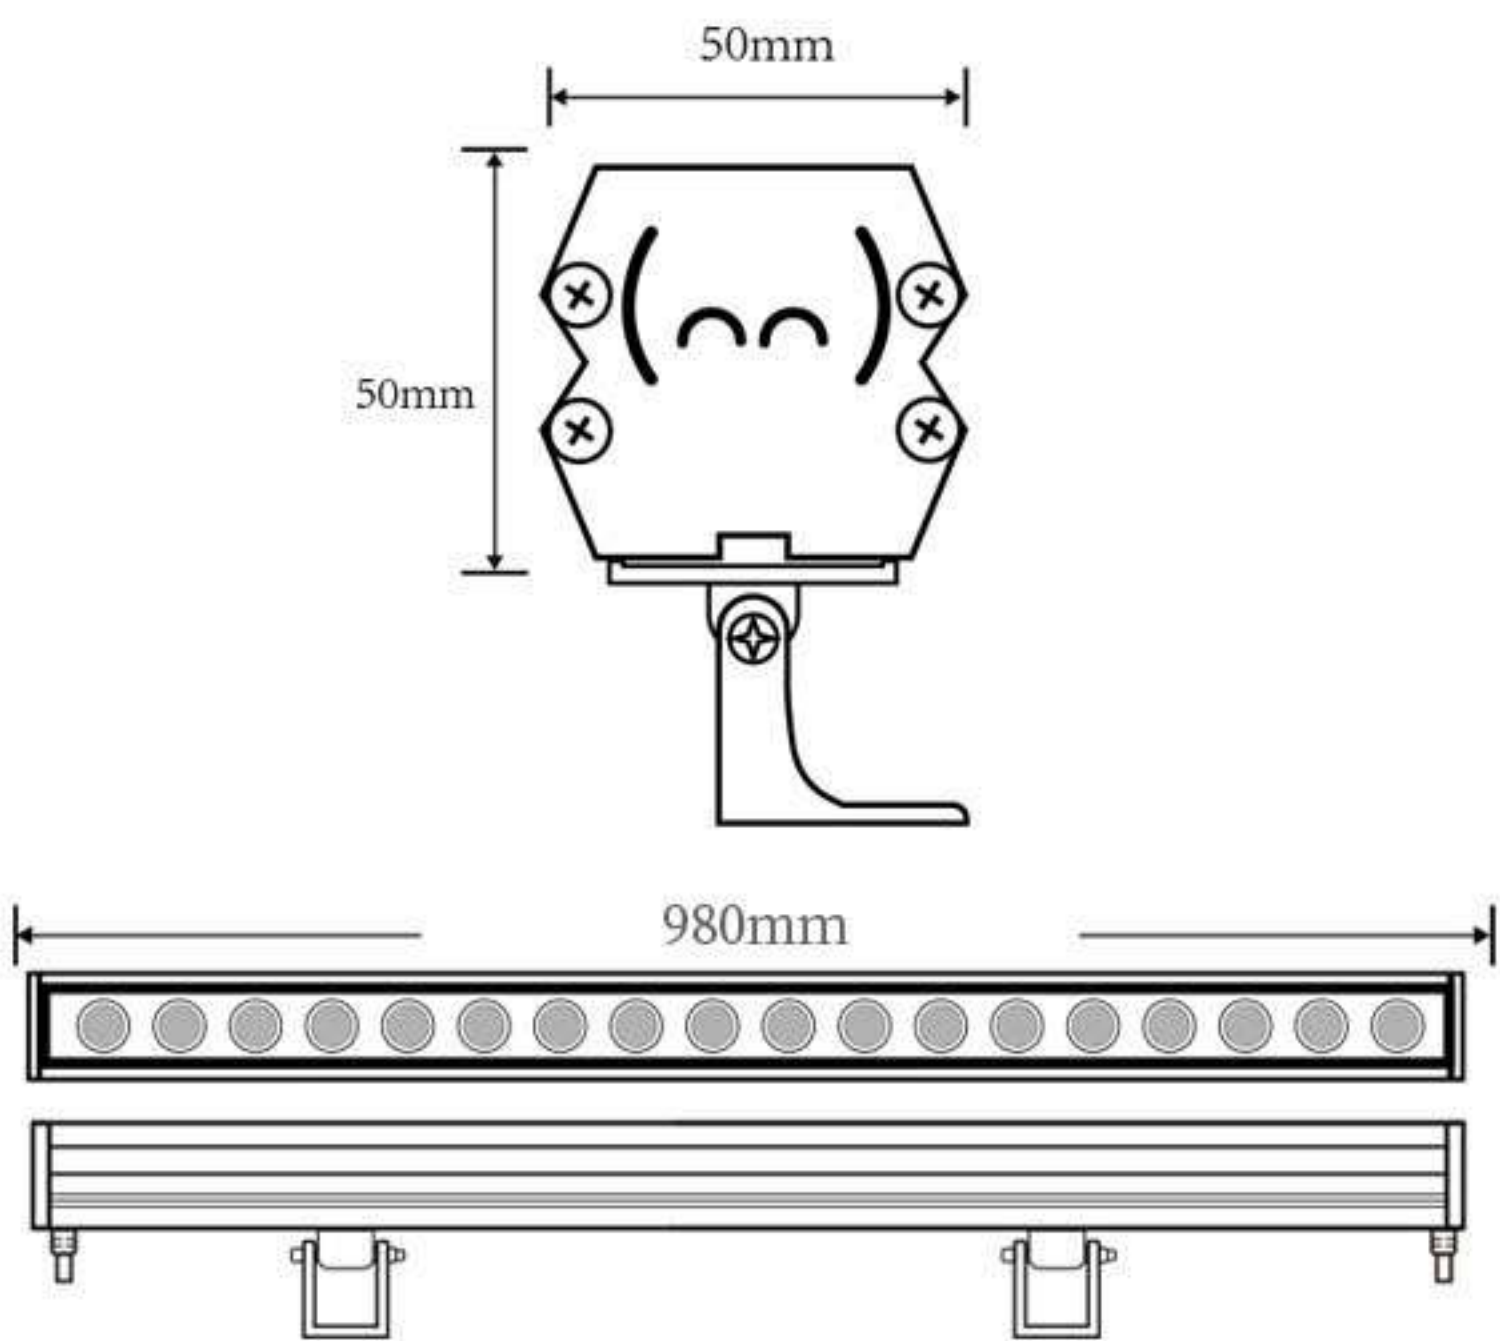

PRODUCT INFORMATION


|                     |                                      |
|---------------------|--------------------------------------|
| Voltage(V)          | AC180V-240V                          |
| Wattage(W)          | 18W 24W 36W                          |
| LED chips           | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source        | SMD3030/SMD2835                      |
| Bean Angle          | 15-30-45-60/10*60/15*45/20*40        |
| Working Temperature | -22℃~+58℃                            |
| Lamp Life           | >30000Hours                          |
| Adjustable Angle    | YES                                  |
| IP Rate             | IP65                                 |
| CCT                 | W/WW/Y/DMX512RGB/DMX512RGBW          |



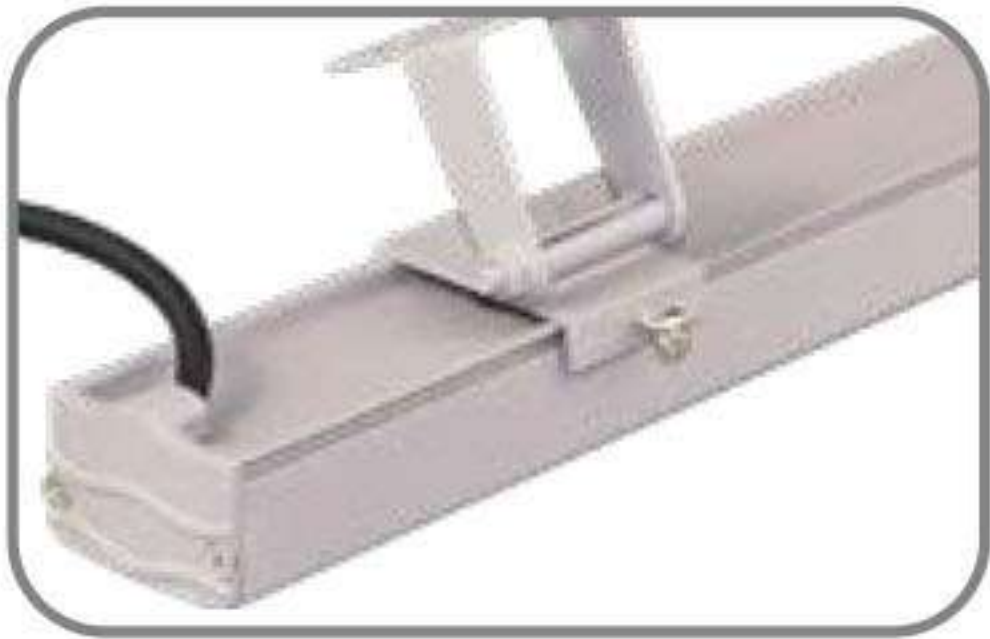

JX-XQD014


Product Size: (unit: mm)±5mm

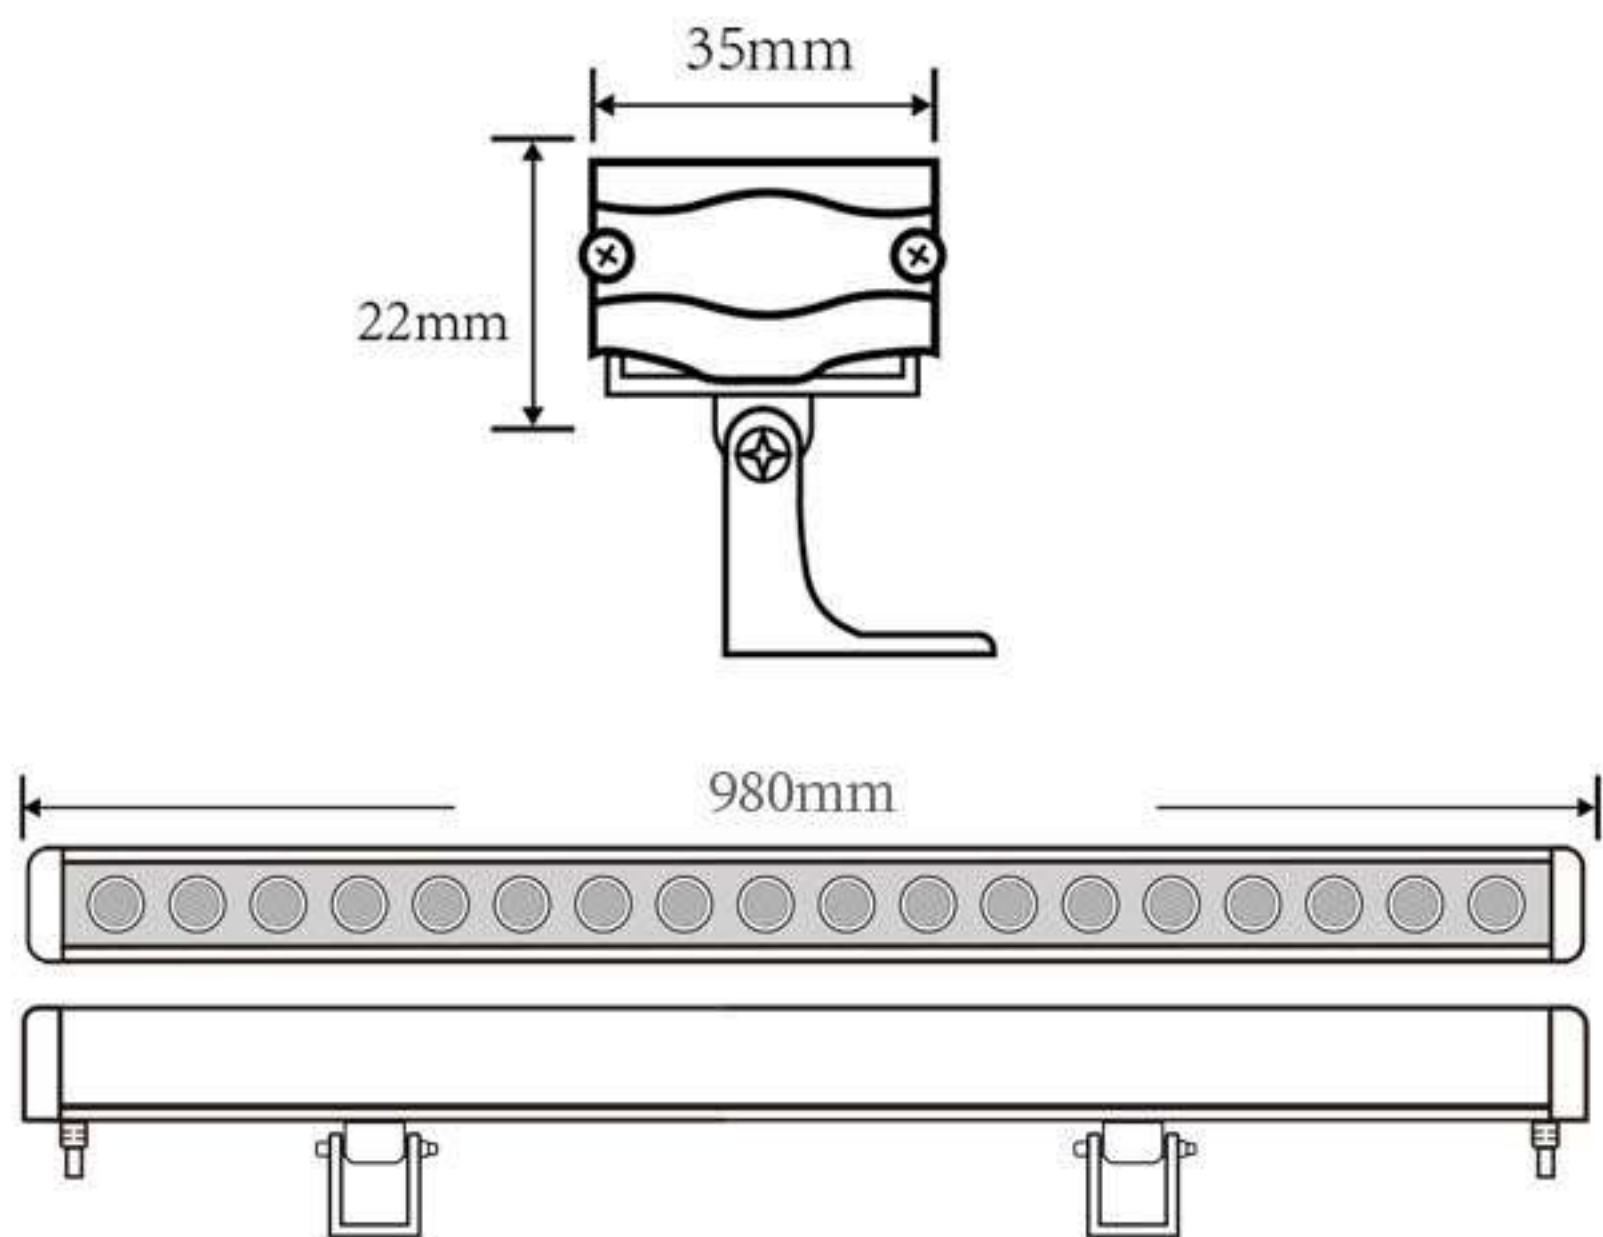

PRODUCT INFORMATION



|                     |                                      |
|---------------------|--------------------------------------|
| Voltage(V)          | DC24V                                |
| Wattage(W)          | 18W 24W                              |
| LED chips           | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source        | SMD5050/SMD3535                      |
| Working Temperature | -22℃~+58℃                            |
| Lamp Life           | >30000Hours                          |
| Beam Angle          | 30°-45°-60°                          |
| Adjustable Angle    | YES                                  |
| IP Rate             | IP65                                 |
| CCT                 | W/WW/Y/DMX512RGB/DMX512RGBW          |



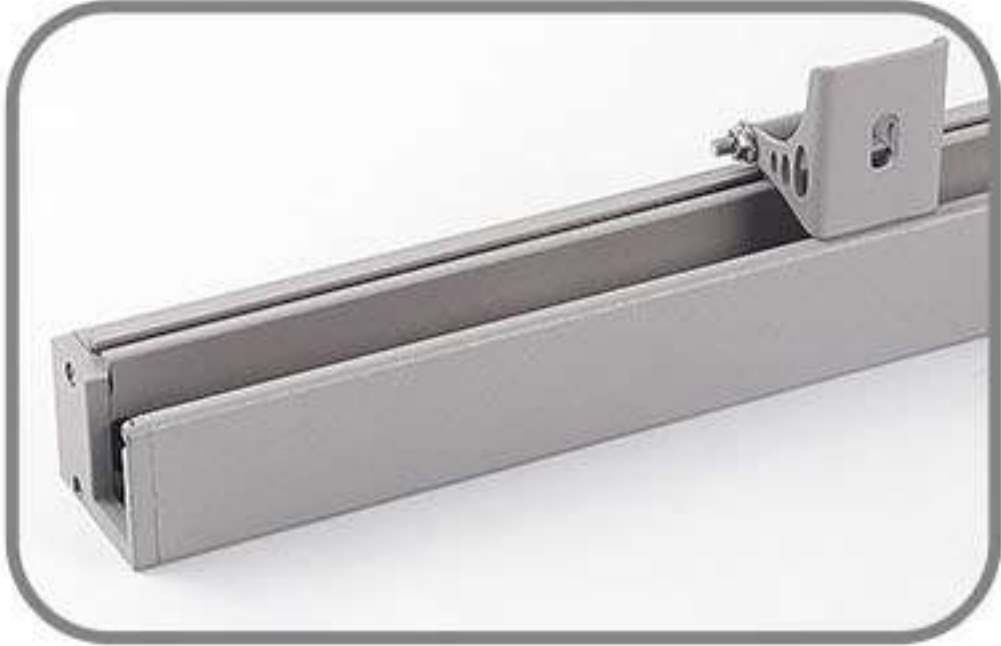

JX-XQD015

Product Size: (unit: mm)±5mm

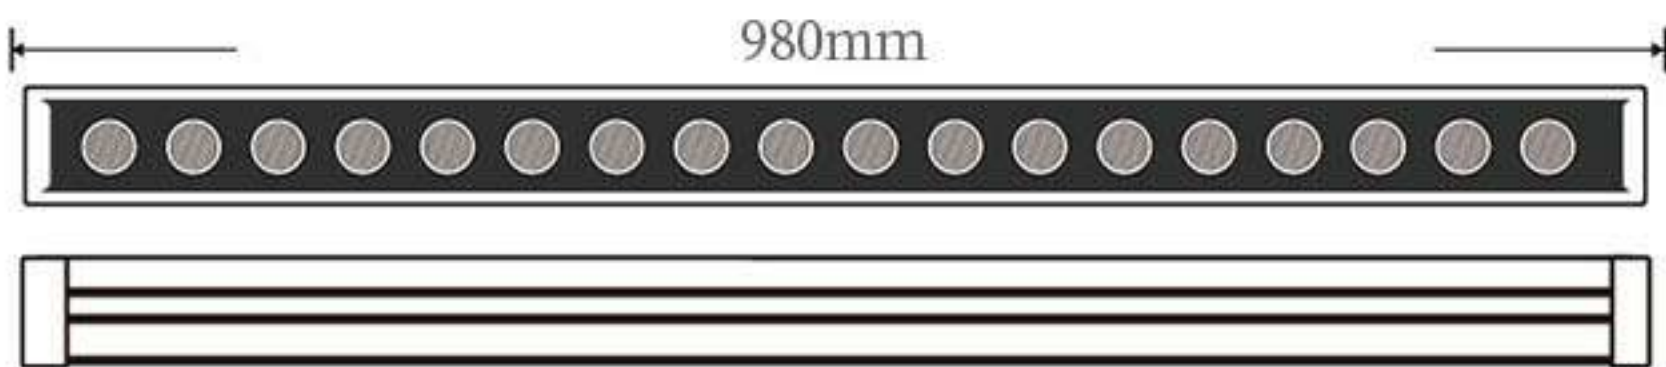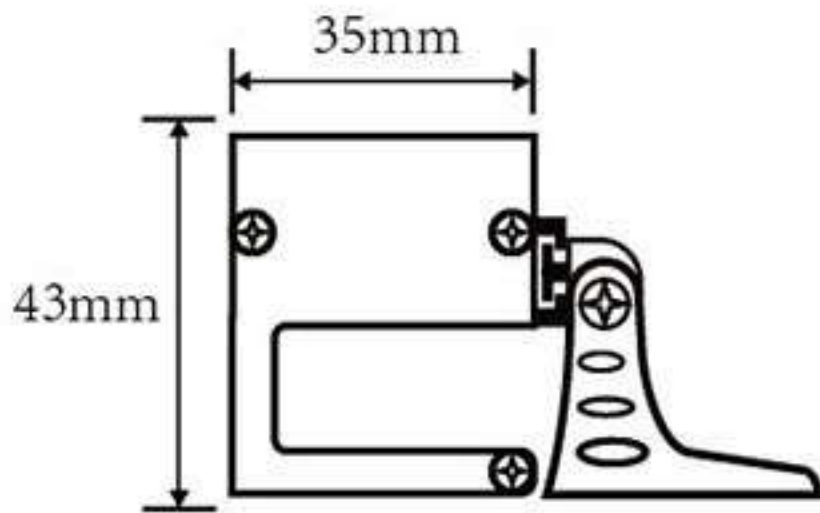

PRODUCT INFORMATION


|                     |                                      |
|---------------------|--------------------------------------|
| Voltage(V)          | DC24V                                |
| Wattage(W)          | 18W 24W 36W                          |
| LED chips           | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source        | SMD5050/SMD3535                      |
| Working Temperature | -22°C~+58°C                          |
| Lamp Life           | >30000Hours                          |
| Beam Angle          | 15°-30°-45°-60°/10*60°/15*45°/20*40° |
| Adjustable Angle    | YES                                  |
| IP Rate             | IP65                                 |
| CCT                 | W/WW/Y/DMX512RGB/DMX512RGBW          |





JX-XQD016


Product Size: (unit: mm)  $\pm 5\text{mm}$

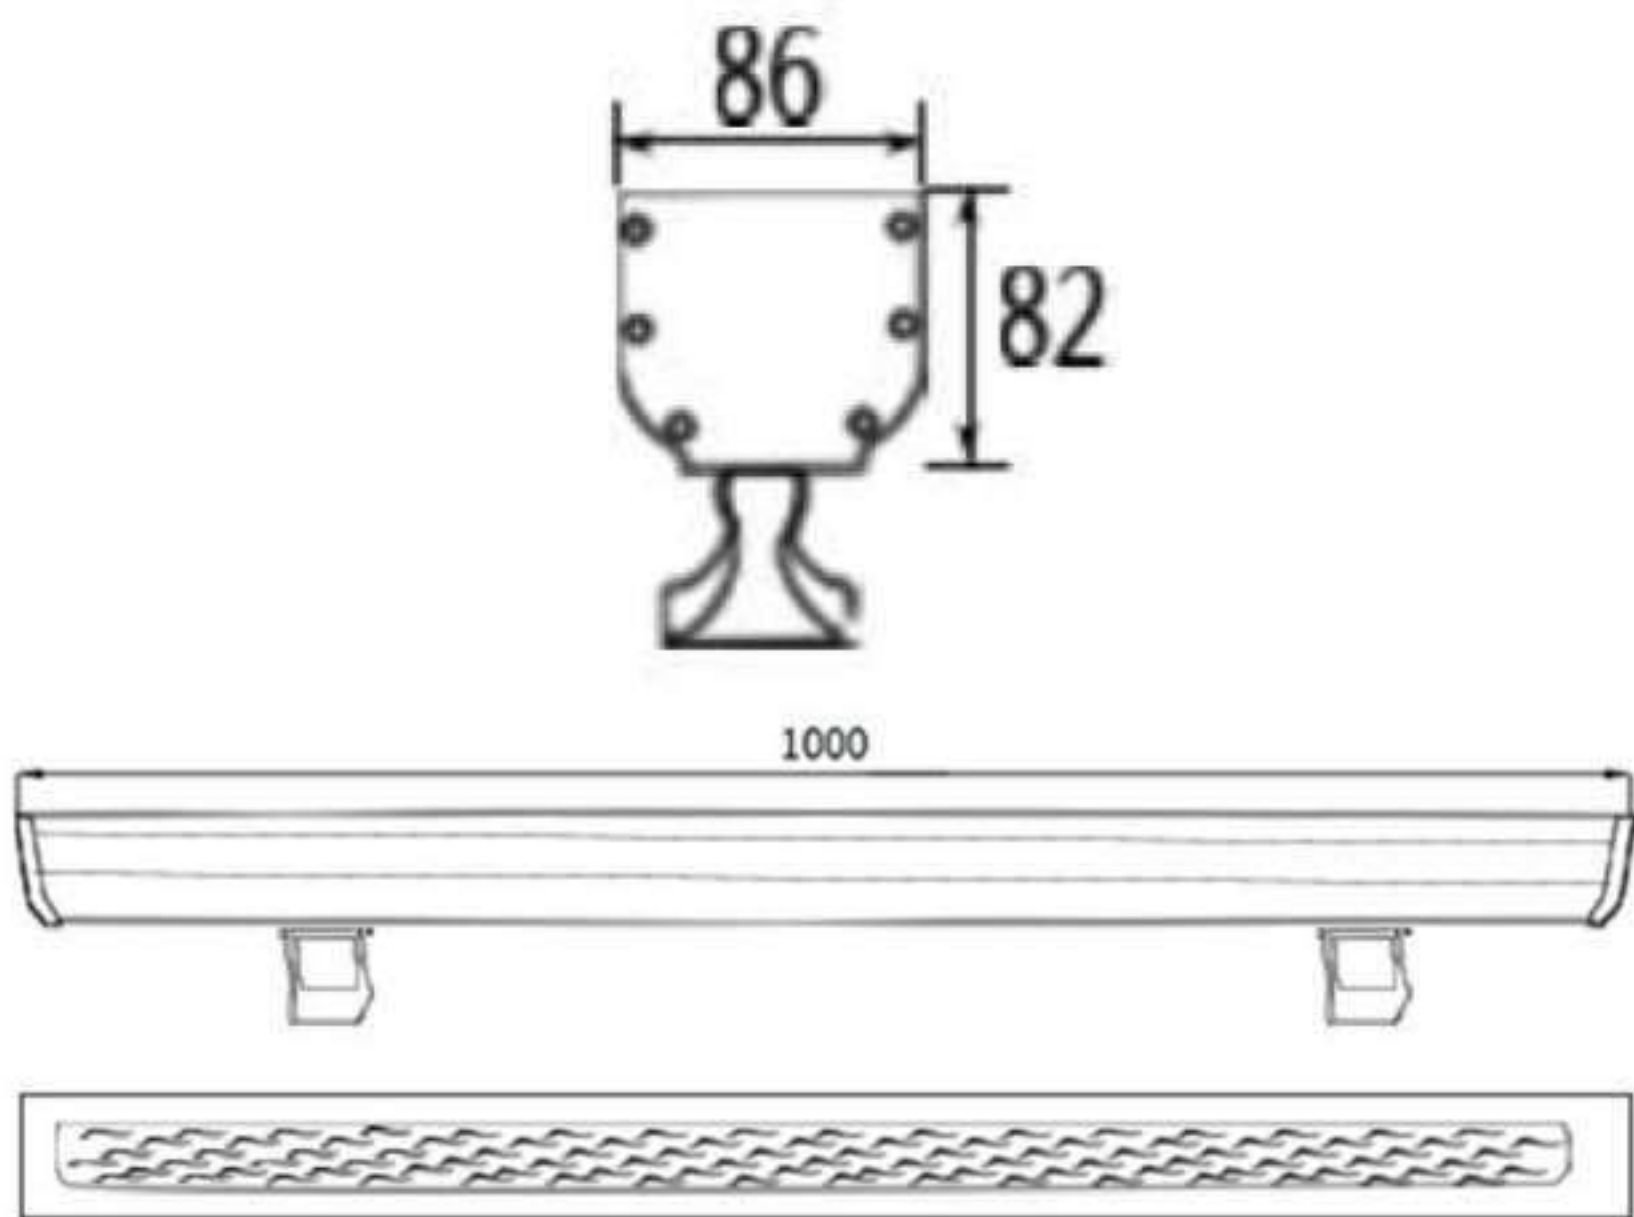

PRODUCT INFORMATION

|                     |                                      |
|---------------------|--------------------------------------|
| Voltage(V)          | DC24V                                |
| Wattage(W)          | 36W/48W/60W/80W                      |
| LED chips           | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source        | Puri/Osram                           |
| Working Temperature | -22°C~+58°C                          |
| Lamp Life           | >30000Hours                          |
| Beam Angle          | 45°/60°                              |
| Adjustable Angle    | YES                                  |
| IP Rate             | IP66                                 |



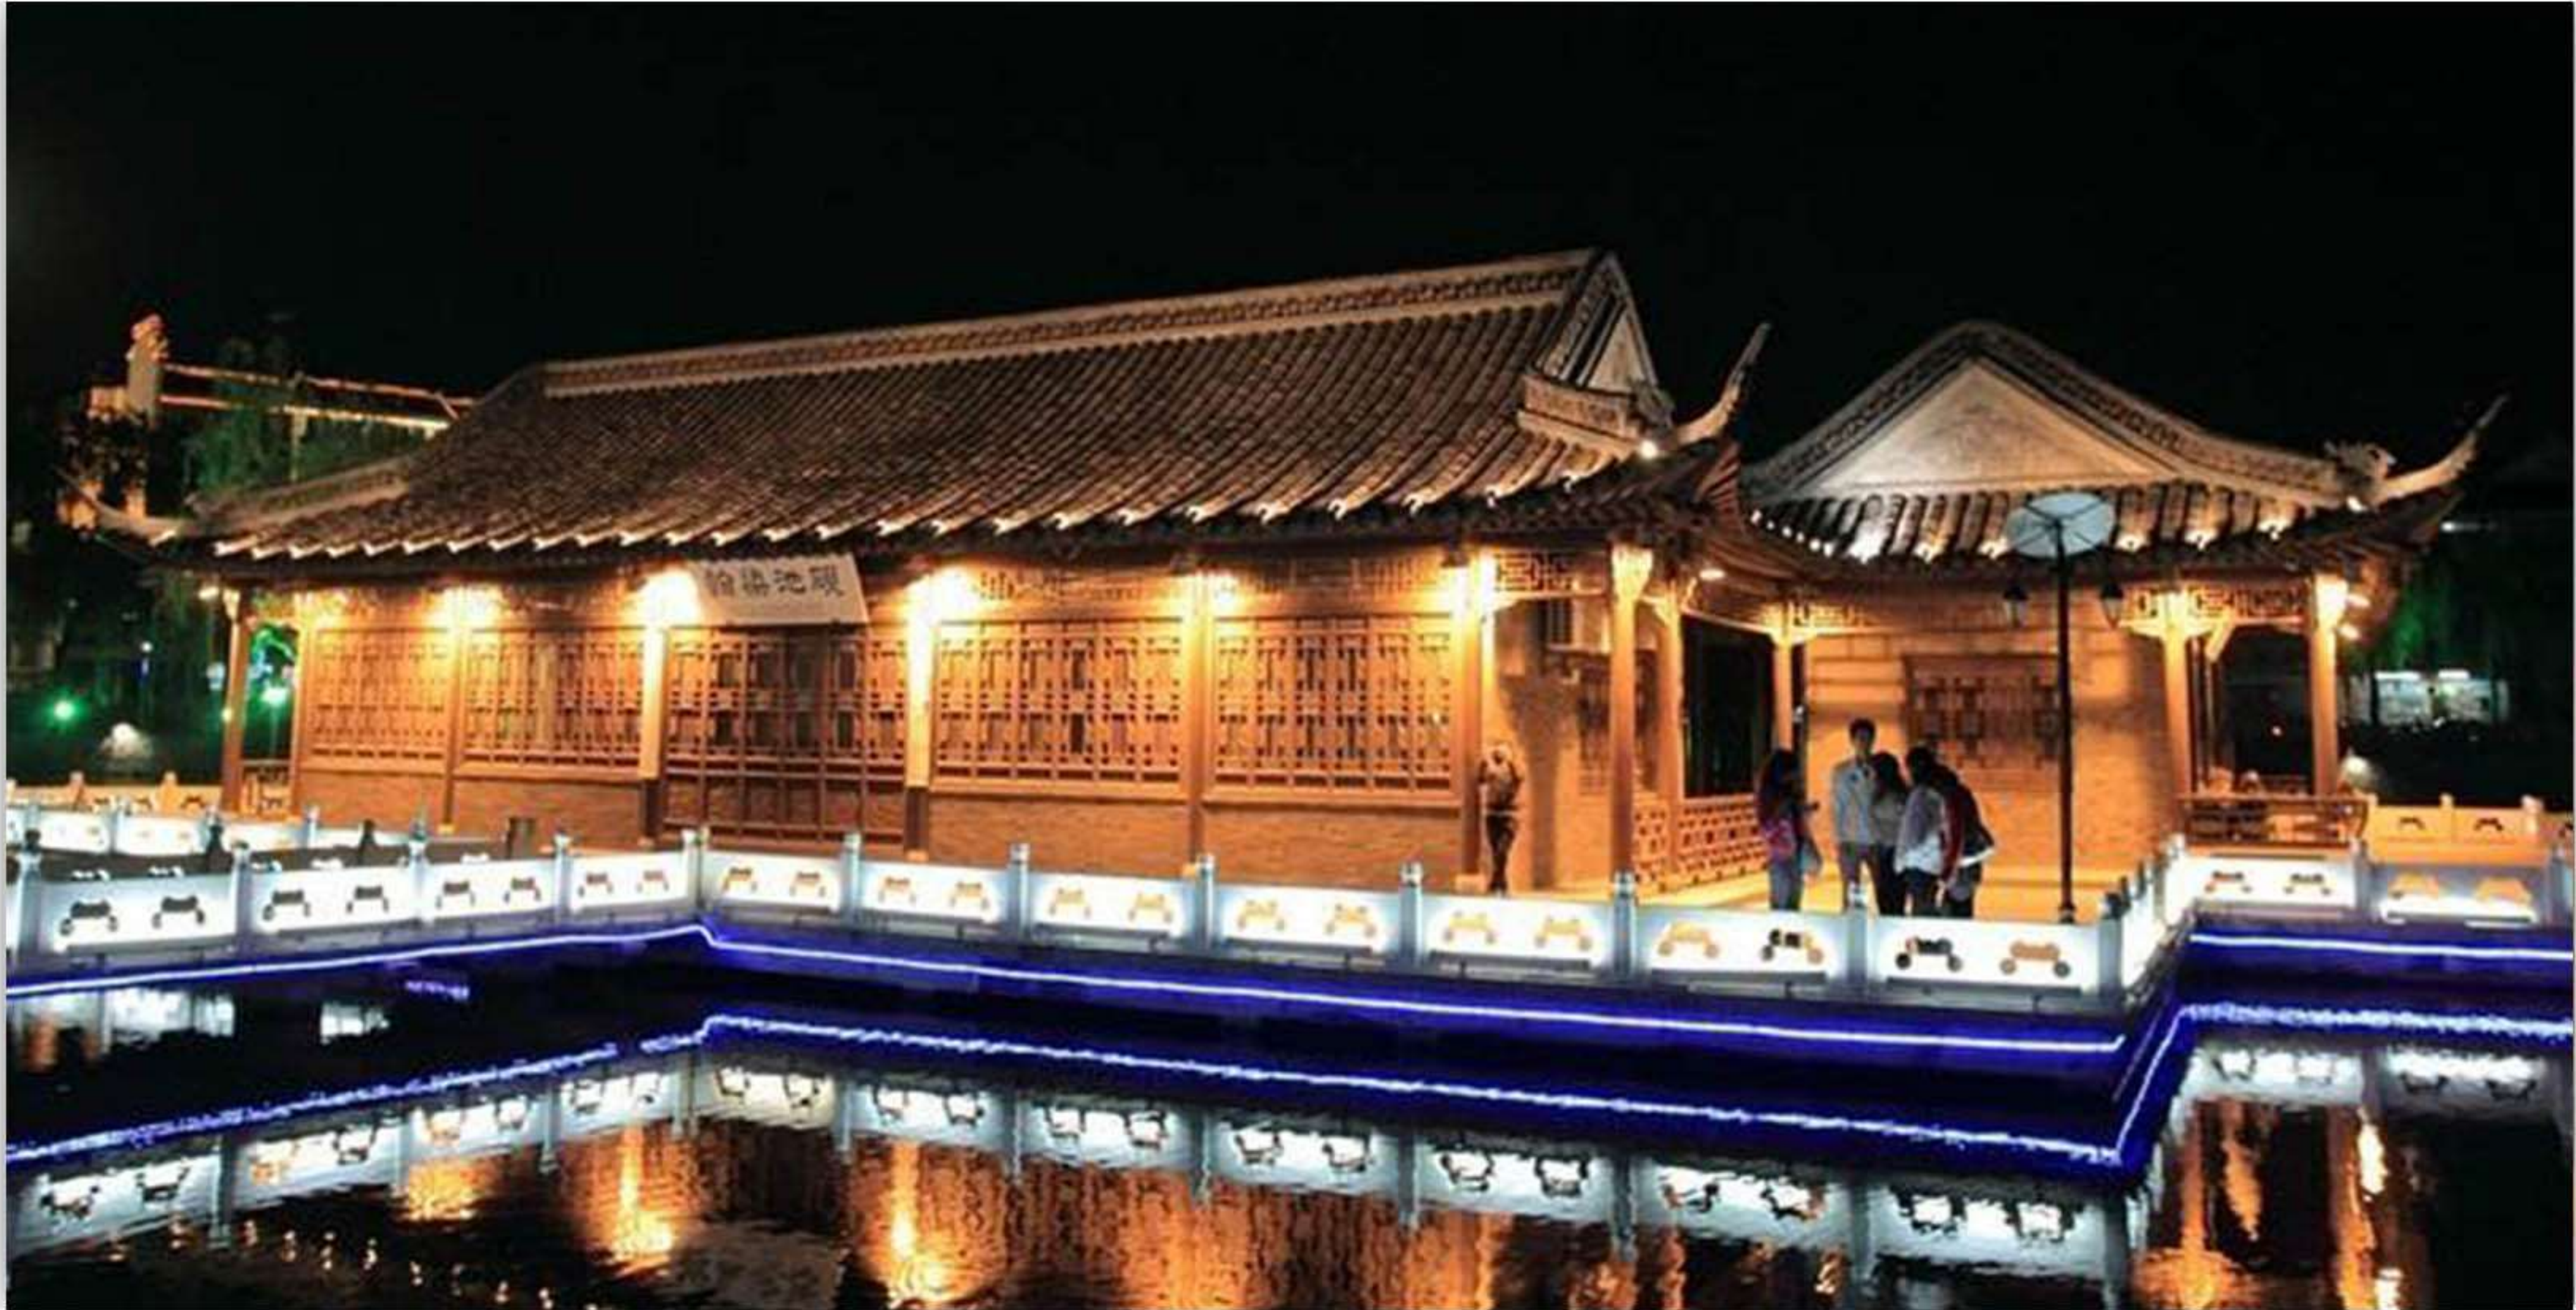


JX-XQD017



Product Size: (unit: mm)  $\pm 5\text{mm}$

PRODUCT INFORMATION

|                     |                                         |
|---------------------|-----------------------------------------|
| Voltage(V)          | AC85-265V                               |
| Wattage(W)          | 18W 24W 36W                             |
| LED chips           | Bridgelux/Philips/Sanan/Cree/Epistar    |
| Light source        | SMD3030                                 |
| Working Temperature | -22℃~+58℃                               |
| Lamp Life           | >30000Hours                             |
| Beam Angle          | 15°/30°/45°/60°/10°*60°/15°*45°/20°*40° |
| Adjustable Angle    | YES                                     |
| IP Rate             | IP65                                    |

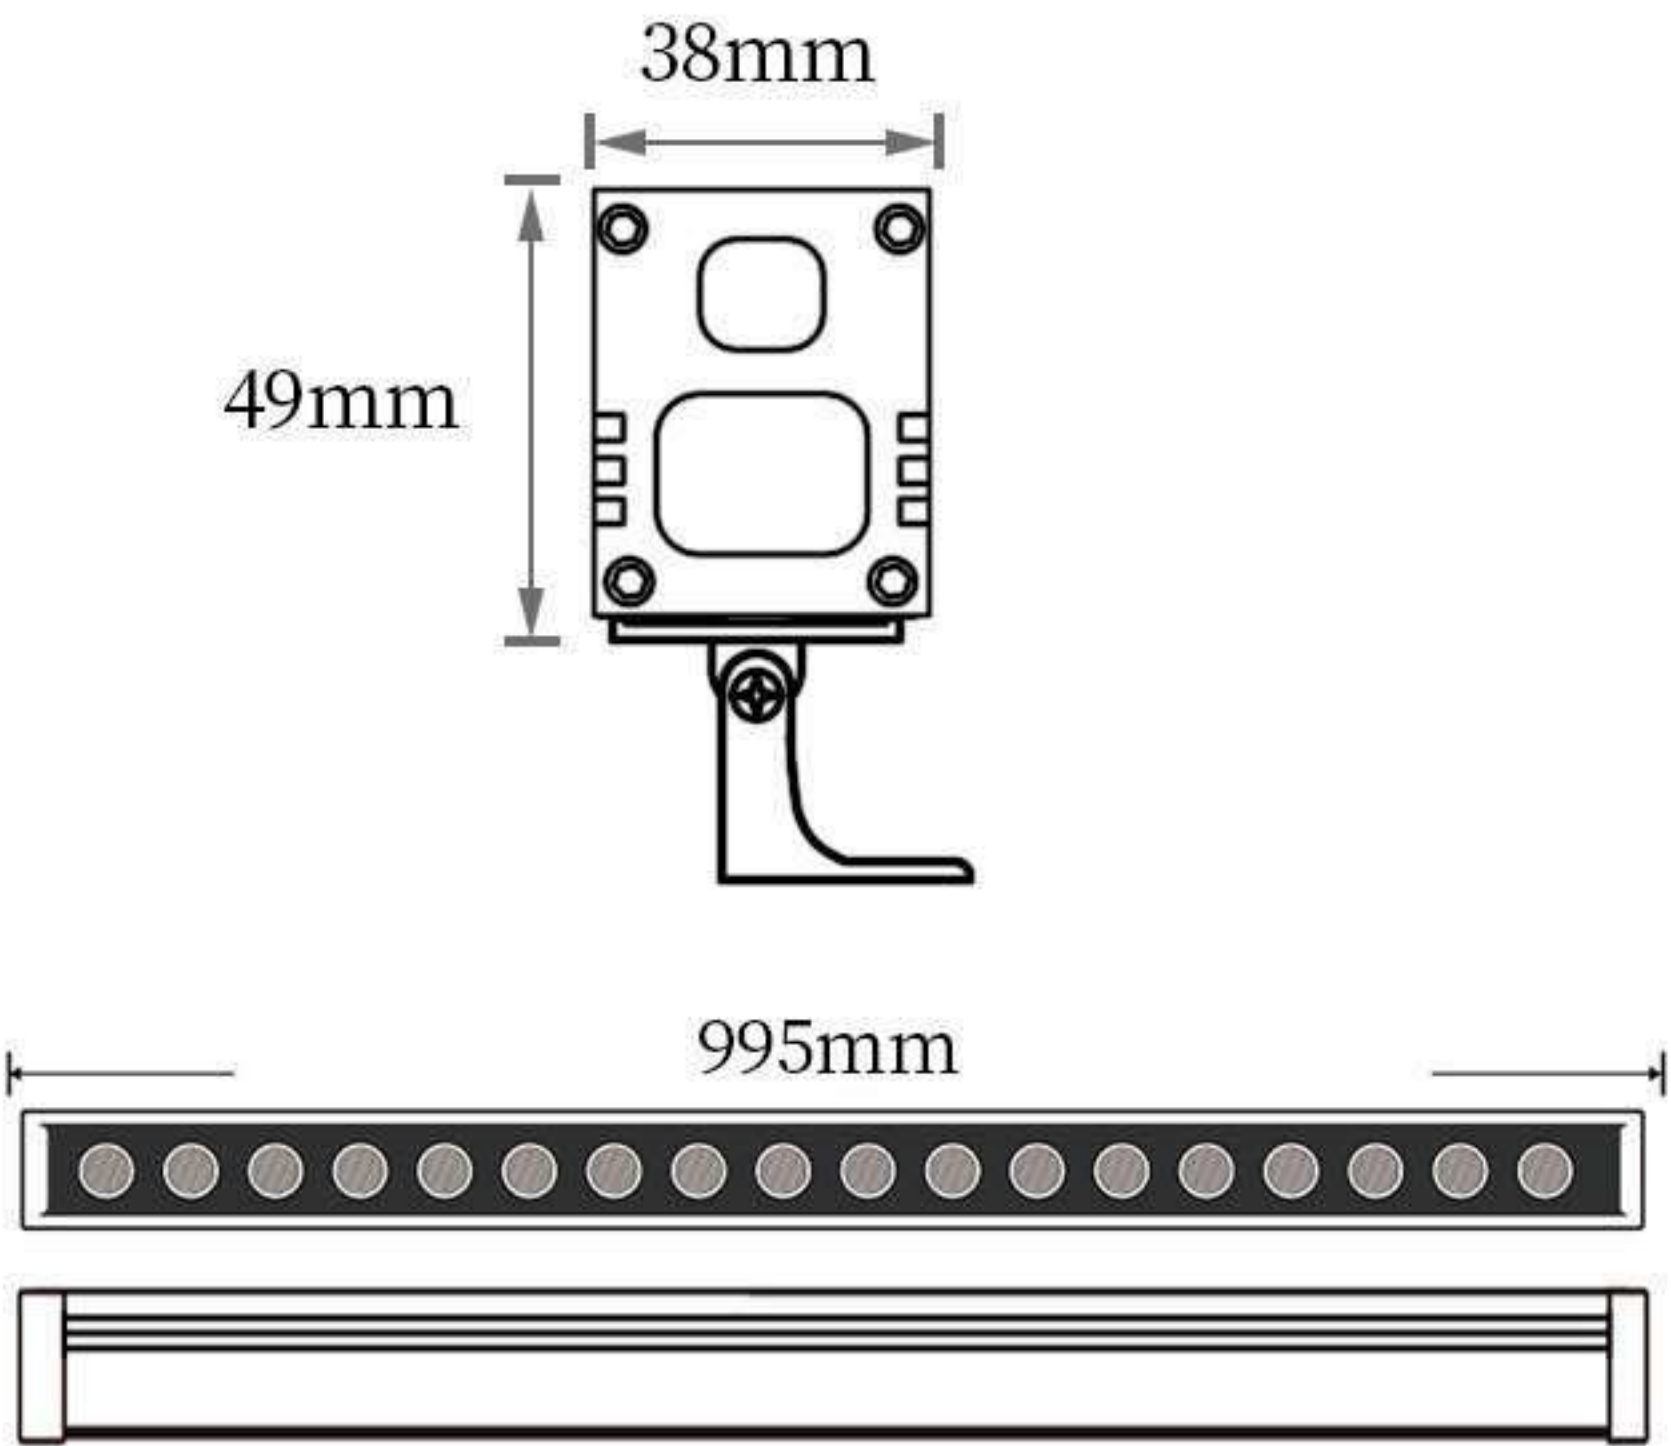





JX-XQD018

Product Size: (unit: mm) ±5mm

PRODUCT INFORMATION

|                     |                                      |
|---------------------|--------------------------------------|
| Voltage(V)          | DC24V                                |
| Wattage(W)          | 30W                                  |
| LED chips           | Bridgelux/Philips/Sanan/Cree/Epistar |
| Light source        | SMD5050/SMD3535                      |
| Working Temperature | -22℃~+58℃                            |
| Lamp Life           | >30000Hours                          |
| Beam Angle          | 15°/30°/45°/60°/10*60°/15*45°/20*40° |
| Adjustable Angle    | YES                                  |
| IP Rate             | IP65                                 |

