






30mm Point light - Black Body



PRODUCT INFORMATION

Operating Voltage(V):	DC12V
Wattage(W):	0.62-0.72W
Light Source:	SMD3535
Color Temperature:	TTLRGB/DMXRGB/DMXRGBW
ControllerMethod:	TTL/DMX512
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP66
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	30mm,30pcs/strip

Product Size:






30mm Point light Grey body



PRODUCT INFORMATION

Operating Voltage(V):	DC12V
Wattage(W):	0.62-0.72W
Light Source:	SMD3535
Color Temperature:	TTLRGB/DMXRGB/DMXRGBW
ControllerMethod:	TTL/DMX512
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP66
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	30mm,30pcs/strip

Product Size:

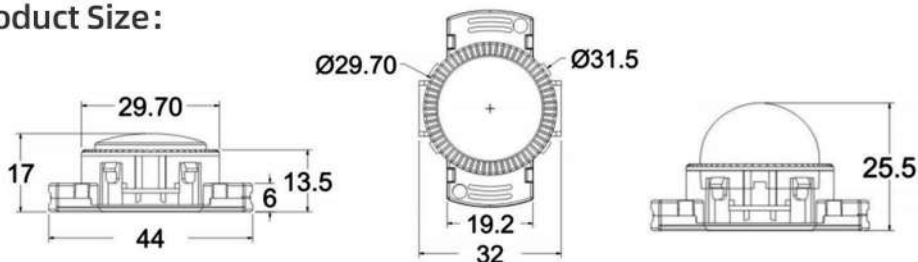




35mm Point light



PRODUCT INFORMATION

Operating Voltage(V):	DC12V
Wattage(W):	0.82W
Light Source:	SMD3535
Color Temperature:	TTLRGB/DMXRGB/DMXRGBW
ControllerMethod:	TTL/DMX512
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP66
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	35mm,30pcs/strip

Product Size:

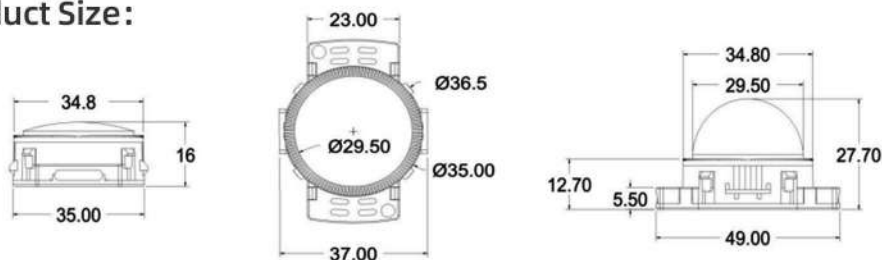


40mm Point light-Black Body



PRODUCT INFORMATION

Operating Voltage(V):	DC24V
Wattage(W):	1.2-1.64W
Light Source:	SMD3535
Color Temperature:	W/Y/WW/TTLRGB/DMXRGB/DMXRGBW
ControllerMethod:	TTL/DMX512
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP66
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	40mm,30pcs/strip

Product Size:

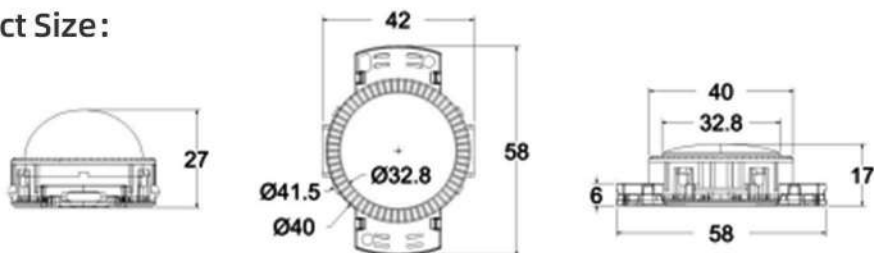


50mm Point light Black Body



PRODUCT INFORMATION

Operating Voltage(V):	DC24V
Wattage(W):	1.2-1.64W
Light Source:	SMD3535
Color Temperature:	W/Y/WW/TTLRGB/DMXRGB/DMXRGBW
ControllerMethod:	TTL/DMX512
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP66
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	50mm,30pcs/strip

Product Size:

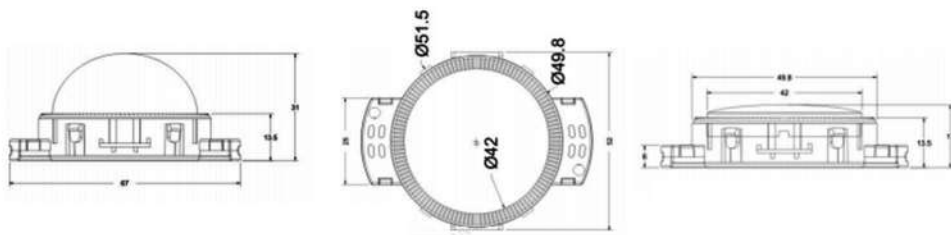


50mm Point light-Grey Body



PRODUCT INFORMATION

Operating Voltage(V):	DC24V
Wattage(W):	1.2-1.64W
Light Source:	SMD3535
Color Temperature:	W/Y/WW/TTLRGB/DMXRGB/DMXRGBW
ControllerMethod:	TTL/DMX512
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP66
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	50mm,30pcs/strip

Product Size:

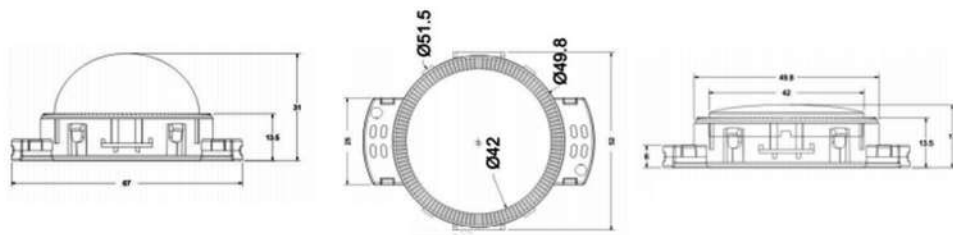


80mm Point light-Black body



PRODUCT INFORMATION

Operating Voltage(V):	DC24V
Wattage(W):	3.3W
Light Source:	SMD3535
Color Temperature:	DMX512RGB/DMX512RGBW
ControllerMethod:	DMX512
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP66
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	80mm

Product Size:

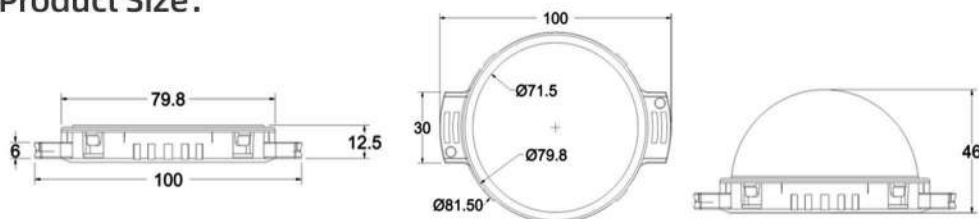


80mm Pointlight-GreyBody




PRODUCT INFORMATION

Operating Voltage(V):	DC24V
Wattage(W):	3.3W
Light Source:	SMD3535
Color Temperature:	DMX512RGB/DMX512RGBW
ControllerMethod:	DMX512
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP66
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	80mm

Product Size:

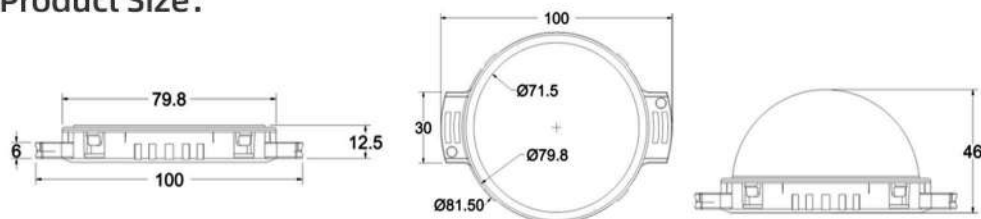


120mm Pointlight-Grey Body

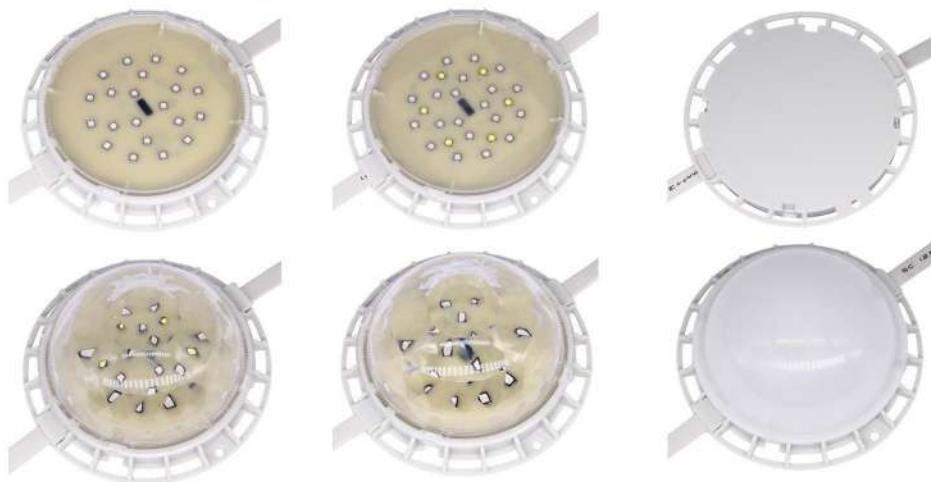

PRODUCT INFORMATION

Operating Voltage(V):	DC24V
Wattage(W):	4.9W
Light Source:	SMD3535
Color Temperature:	DMX512RGB/DMX512RGBW
Controller Method:	DMX512
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP66
Working temperature (°C):	-20 (°C) to +60 (°C)
Size(mm):	120mm

Product Size:

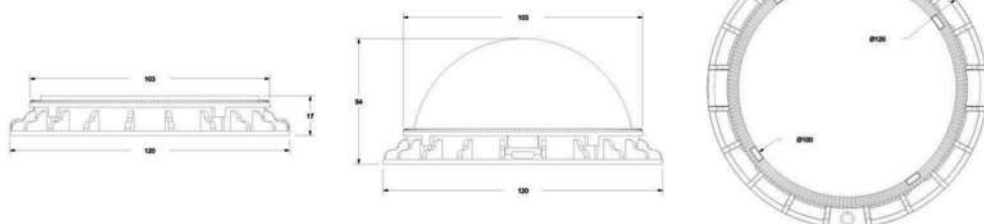


40*50 Point light



PRODUCT INFORMATION

Operating Voltage(V):	DC24V
Wattage(W):	1.3W-1.78W
Light Source:	SMD3535
Color Temperature:	DMX512RGB/DMX512RGBW
ControllerMethod:	DMX512
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP66
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	40*50mm

Product Size:

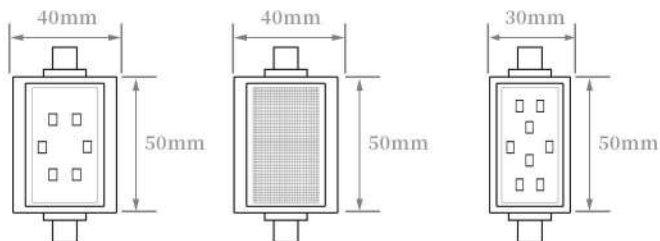



30mm Point light



PRODUCT INFORMATION

Operating Voltage(V):	DC12V
Wattage(W):	0.72W
Light Source:	SMD3535/SMD4040/SMD5054
Color Temperature:	W/WW/Y/TTL-RGB
ControllerMethod:	TTL
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP65
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	30mm,30pixel/strip

Product Size: Unit:mm (±2mm)

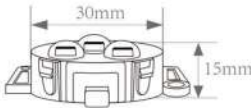



30mm Point light



PRODUCT INFORMATION

Operating Voltage(V):	DC12V
Wattage(W):	0.72W
Light Source:	SMD3535/SMD4040/SMD5054
Color Temperature:	W/WW/Y/TTL-RGB
ControllerMethod:	TTL
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP65
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	30mm,30pixel/strip

Product Size: Unit:mm (±2mm)

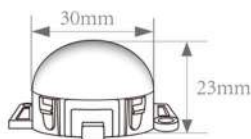



30mm Point light



PRODUCT INFORMATION

Operating Voltage(V):	DC12V
Wattage(W):	0.72W
Light Source:	SMD5050
Color Temperature:	TTL-RGBW
ControllorMethod:	TTL
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP65
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	30mm,30pixel/strip

Product Size: Unit:mm (±2mm)

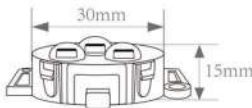



50mm Pixellight



PRODUCT INFORMATION

Operating Voltage(V):	DC24V
Wattage(W):	1.5W
Light Source:	SMD3535/SMD5054
Color Temperature:	W/WW/Y/SPIRGB
ControllerMethod:	TTL
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP68
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	50mm pixel,30pixels/strip

Product Size: Unit:mm (±2mm)

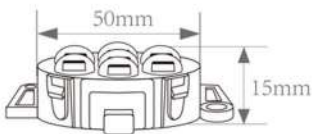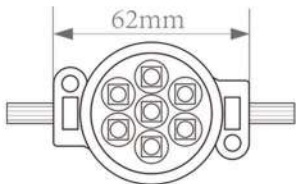



50mm Pixellight




PRODUCT INFORMATION

Operating Voltage(V):	DC24V
Wattage(W):	1.5W
Light Source:	SMD3535/SMD5054
Color Temperature:	W/WW/Y/SPiRGB
ControllerMethod:	TTL
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP68
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	50mm pixel,30pixels/strip

Product Size: Unit:mm (±2mm)

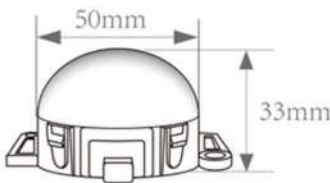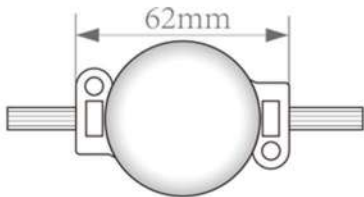


20mm Pixel light

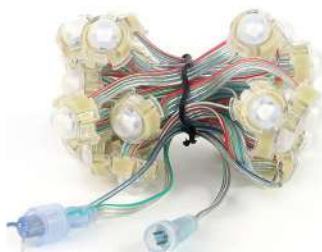


PRODUCT INFORMATION

Operating Voltage(V):	DC5V/DC12V
Wattage(W):	0.3W
Light Source:	SMD5050/SMD2835
Color Temperature:	W/WW/Y/TTLRGB
ControllerMethod:	TTL
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP65
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	20mm

Product Size:




2cm Led Point light



PRODUCT INFORMATION

Operating Voltage(V):	DC12V
Wattage(W):	0.3W
Light Source:	SMD5050/SMD3535
Color Temperature:	W/WW/Y/TTLRGB/DMXRGB
ControllerMethod:	TTL/DMX512
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP65
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	20mm

Product Size:

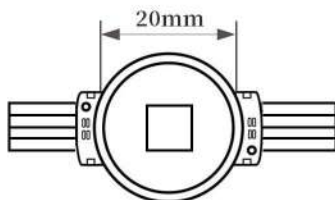


LED Cross Star Light Series



PRODUCT INFORMATION

Operating Voltage(V):	DC24V/AC220V
Wattage(W):	5W/15W
Light Source:	5050
Color Temperature:	W/WW/Y/R/G/B/RGB/DMX512RGB
ControllerMethod:	DMX512
Material:	PC
Beam Angle:	15°/30°/45°/60°
IP Rating:	IP65
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	175*175*80MM

Product Size:

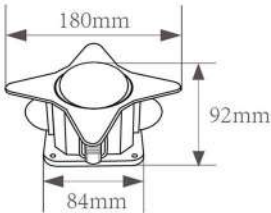


LED Cross Star Light Series



PRODUCT INFORMATION

Operatin Voltgae(V):	DC24V/AC220V
Wattage(W):	7W/21W
Light Source:	LED
Color Temperature:	W//WW/Y/RGB/DMXRGB
ControllerMethod:	DMX512
Material:	Aluminum+PC
Beam Angle:	15°/30°/45°/60°
IP Rating:	IP65
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	140*75mm

Product Size:

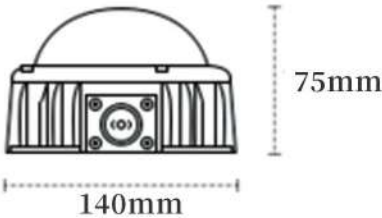


LED Cross Star Light Series



PRODUCT INFORMATION

Operating Voltage(V):	AC24V/DC24V/AC220V
Wattage(W):	5W/15W
Light Source:	LED
Color Temperature:	W/WW/Y/RGB
ControllerMethod:	NO
Material:	PC
Beam Angle:	15°/30°/45°/60°
IP Rating:	IP65
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	185*185*55mm

Product Size:

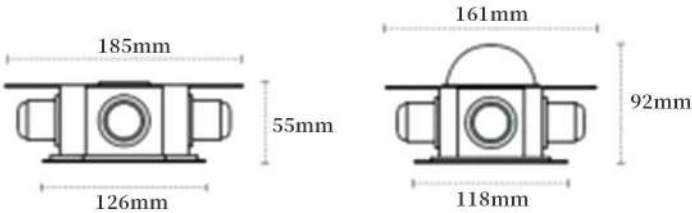


10mm Point light



PRODUCT INFORMATION

Operating Voltage(V):	DC24V
Wattage(W):	3.6W
Light Source:	SMD5050
Color Temperature:	W/WW/Y/G/R/B/TTLRGB
ControllerMethod:	TTL
Material:	PC
Beam Angle:	160Degree
IP Rating:	IP65
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	100mm

Product Size:

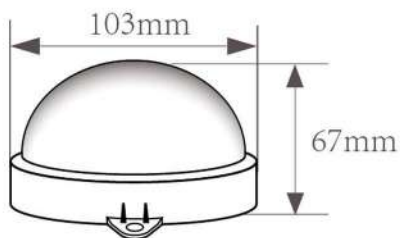


Led Point light



PRODUCT INFORMATION

Operating Voltage(V):	DC24V
Wattage(W):	1W-3W
Light Source:	SMD5050
Color Temperature:	W/WW/Y/DMX512RGB
ControllerMethod:	DMX512
Material:	PC/Die-casting aluminum
Beam Angle:	160Degree
IP Rating:	IP65
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	46*45mm

Product Size:

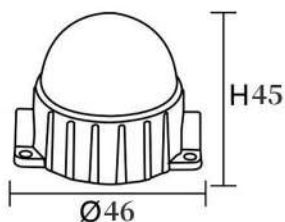


Led Point light



PRODUCT INFORMATION

Operating Voltage(V):	DC24V
Wattage(W):	5W-7W
Light Source:	SMD5050/SMD3535
Color Temperature:	W/WW/Y/DMX512RGB/DMX512RGBW
ControllerMethod:	DMX512
Material:	PC/Die-casting aluminum
Beam Angle:	160Degree
IP Rating:	IP65
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	100*80mm

Product Size:

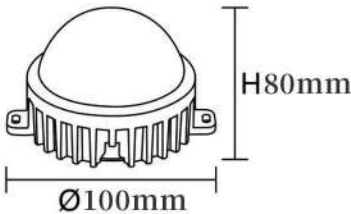


Led Point light



PRODUCT INFORMATION

Operating Voltage(V):	DC24V
Wattage(W):	3W-5W
Light Source:	SMD5050
Color Temperature:	W/WW/Y/DMX512RGB/DMX512RGBW
ControllerMethod:	DMX512
Material:	PC/Die-casting aluminum
Beam Angle:	160Degree
IP Rating:	IP65
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	83*70mm

Product Size:

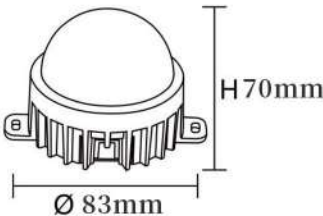


Led Point light




PRODUCT INFORMATION

Operating Voltage(V):	DC24V
Wattage(W):	3W-5W
Light Source:	SMD5050/SMD3535
Color Temperature:	W/WW/Y/DMX512RGB/DMX512RGBW
ControllerMethod:	DMX512
Material:	PC/Die-casting aluminum
Beam Angle:	160Degree
IP Rating:	IP65
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	85*70mm

Product Size:

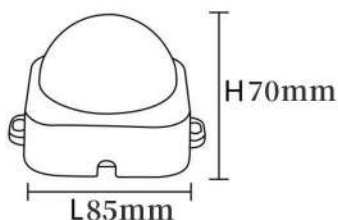


20mm Cheaper led mesh

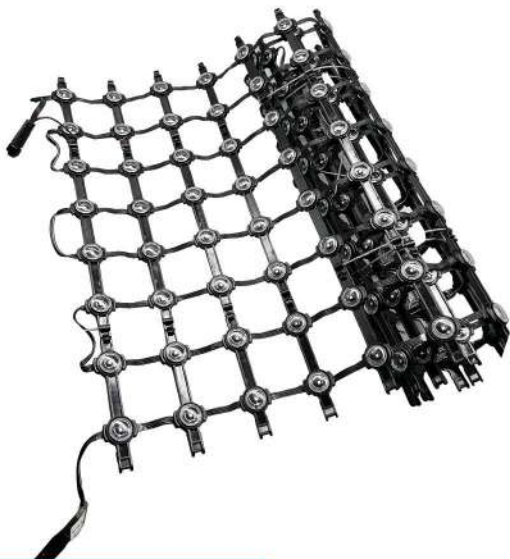

PRODUCT INFORMATION


Operating Voltage(V):	DC12V
Wattage(W):	0.3W
Light Source:	SMD5050/SMD3535
Color Temperature:	TTLRGB/DMX512RGB
ControllerMethod:	TTL/DMX512
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP68
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	20mm

Product Size:

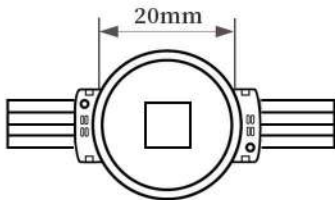

Pixels/Sq		Pixel to pixel size(mm)
100	Pixels	100mm*100mm
144	Pixels	83mm*83mm
256	Pixels	62.5mm*62.5mm
324	Pixels	55mm*55mm
400	Pixels	50mm*50mm


20mm Cheaper led mesh

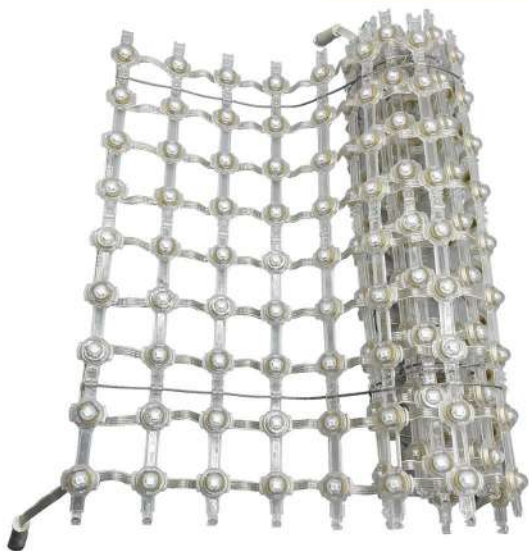

PRODUCT INFORMATION


Operating Voltage(V):	DC12V
Wattage(W):	0.3W
Light Source:	SMD5050
Color Temperature:	TTLRGB
ControllerMethod:	TTL
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP68
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	20mm

Product Size:

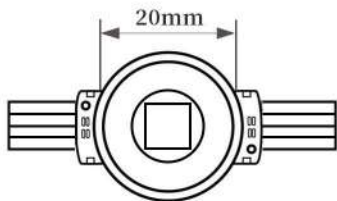

Pixels/Sq		Pixel to pixel size(mm)
100	Pixels	100mm*100mm
256	Pixels	62.5mm*62.5mm
324	Pixels	55mm*55mm
400	Pixels	50mm*50mm


20mm LED Mesh

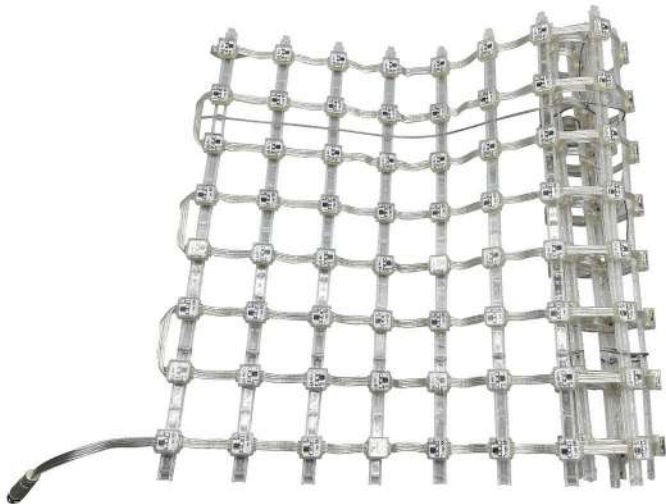

PRODUCT INFORMATION


Operating Voltage(V):	DC12V
Wattage(W):	0.75W/PCS
Light Source:	SMD3535
Color Temperature:	TTLRGB/DMX512RGB
ControllerMethod:	TTL/DMX512
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP65
Working temperature (°C):	-20 (°C)to +60 (°C)
Size(mm):	20mm

Product Size:

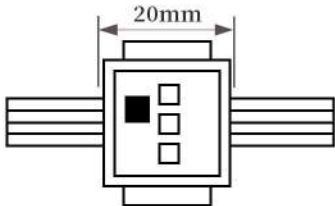


Pixels/Sq		Pixel to pixel size(mm)
100	Pixels	100mm*100mm
144	Pixels	83mm*83mm
256	Pixels	62.5mm*62.5mm
324	Pixels	55mm*55mm
400	Pixels	50mm*50mm


25mm LED Mesh

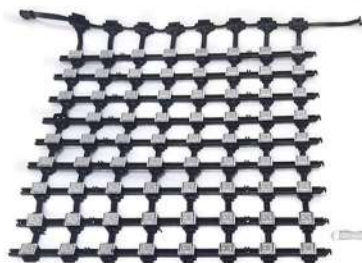

(Black)



(Transparent)




(Grey)

PRODUCT INFORMATION

Operating Voltage(V):	DC12V
Wattage(W):	0.62W/PCS
Light Source:	SMD3535
Color Temperature:	DMXRGB
Controller Method:	DMX512
Material:	PC
Beam Angle:	120Degree
IP Rating:	IP66
Working temperature (°C):	-20 (°C) to +60 (°C)
Size(mm):	25mm

Product Size:



Horizontal Pixels	vertical Pixels	Size(mm)	Type and quantity of lamp beads	Number of light /m2
8	8	25*25mm	3LED RGB3535	64
10	10	25*25mm	3LED RGB3535	100
12	12	25*25mm	3LED RGB3535	120
12	12	25*25mm	3LED RGB3535	144
12	12	25*25mm	3LED RGB3535	168
14	14	25*25mm	3LED RGB3535	196
16	16	25*25mm	3LED RGB3535	224
16	16	25*25mm	3LED RGB3535	256
20	20	25*25mm	3LED RGB3535	320
20	20	25*25mm	3LED RGB3535	360
20	20	25*25mm	3LED RGB3535	400